

Features


- Compression molded from our exclusive solid Vikrell® material
- Shipped with a bath liner to protect product during installation
- 10-year consumer/3-year commercial limited warranty
- Durable high-gloss finish
- Optional attached apron 71268100
- 60" (1524 mm) x 36" (914 mm) x 20-5/16" (516 mm) rough-in dimensions include flanges
- 60" (1524 mm) x 36" (914 mm) x 20-5/16" (516 mm) finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45

36" (914 mm) DROP-IN BATH
71271100
 ALSO 71271300, 73271100

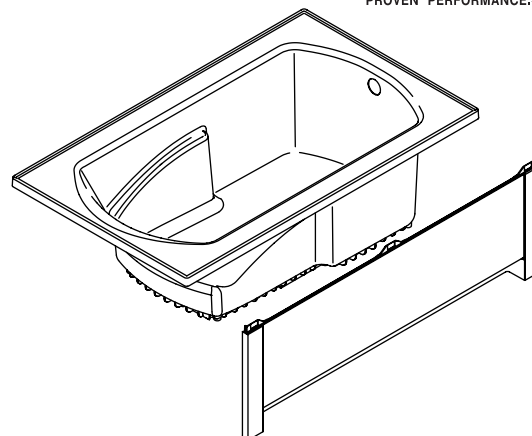

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
71271100	60" (1524 mm) x 36" (914 mm) drop-in bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
71271500	60" (1524 mm) x 36" (914 mm) drop-in bath, 5 pack	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Fixture*:		
Basin area:		
Bathing well	44" (1118 mm) x 25-1/2" (648 mm)	
Top area	51" (1295 mm) x 26-3/4" (679 mm)	
To overflow:		
Water depth	15-1/4" (387 mm)	
Capacity	59 gal (223.3 L)	
* Approximate measurements for comparison only.		
Model	door maximum width	door maximum height
All	60" (1524 mm)*	NA*
* Varies with alternative walls.		


Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

Stud positioning is critical if nailing-in flanges are to be used.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

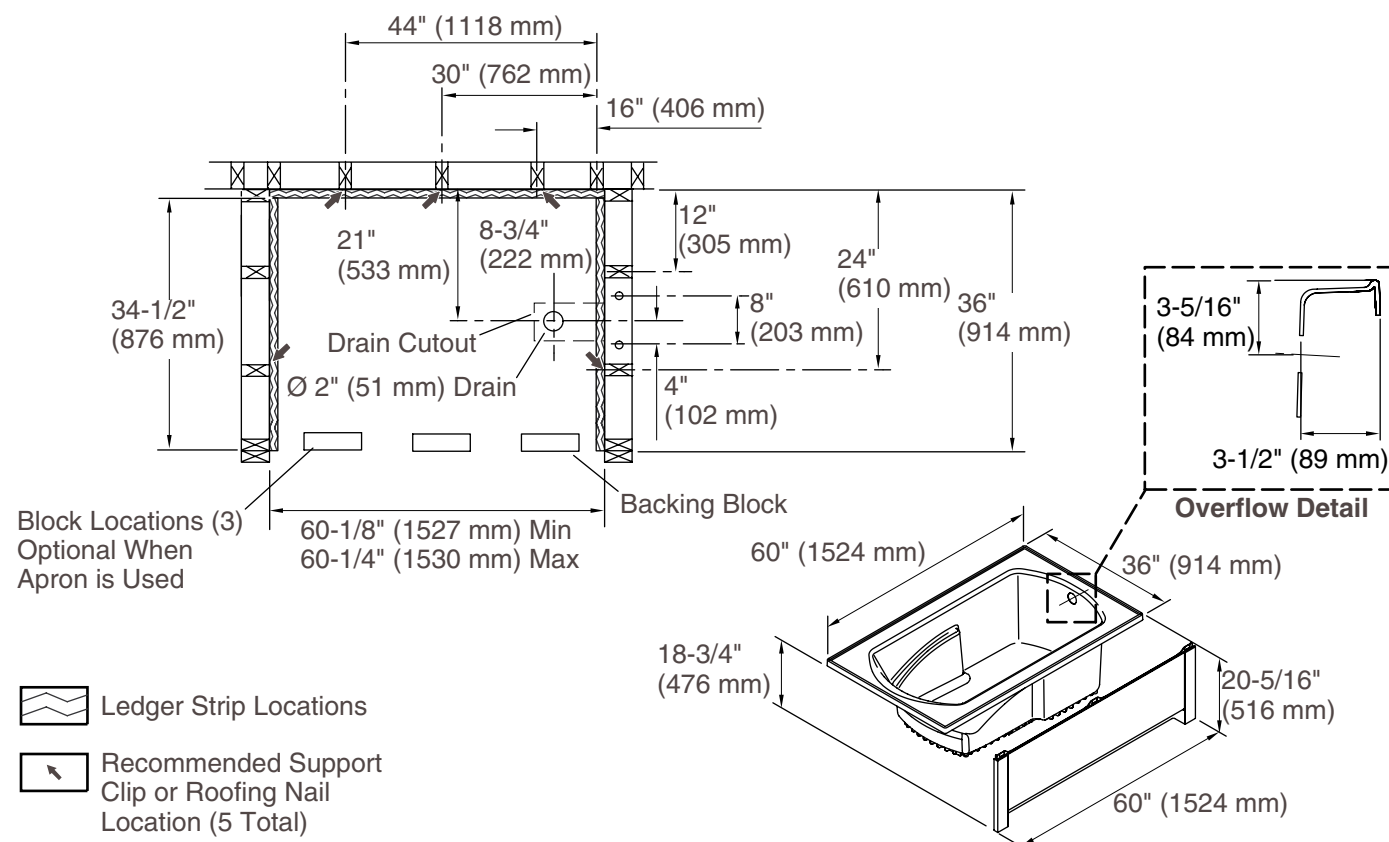

Product Diagram