

- > Energy Saving 14 Watt Integrated LED
- > Uses 81% Less Energy than Equivalent 75 Watt Incandescent Bulb
- > Soft White 3000k CCT Cool White 4000k CCT Daylight 5000k CCT
- > Lasts 45 years or 50,000 Hours Continuous Use
- > Maintenance Free No Bulb Replacements
- > 5 Year Limited Warranty

11" Color preference® Flushmount

910lms | 120VAC | Model 54450111 | Part FM-11-14-802-SV-D-L



SPECIFICATIONS

Model 54450111

Part FM-11-14-802-SV-D-L

Description 11" Color preference® Flushmount

Input Voltage (VAC) 120
Wattage 14
Dimmability N/A

Average Rated Life¹ 50,000 hours

Typical Lumens² 910

CCT³ 3000k/4000k/5000k

Location Rating UL Damp

CRI⁴ ≥80 Beam Angle 120

Operating Temperature Min -4°F (-20° C),

Max 95°F (35° C)

 Power Factor
 >0.9

 R9
 24

 DUV
 -0.0020

 CBCP
 191

 Operating Frequency (Hz)
 60

- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra












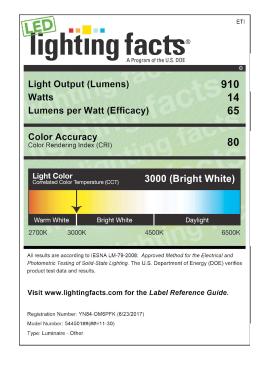





11" Color preference® Flushmount

910lms | 120VAC | Model 54450111 | Part FM-11-14-802-SV-D-L

SHIPPING INFORMATION

54450111

FM-11-14-802-SV-D-L Part

849489001432 UPC

10.79 x 10.79 x 3.54 Product Dimensions (L x W x H in.) 27.4 x 27.4 x 9.00 Product Dimensions (L x W x H cm.)

1.21 Product Weight (lbs.) **Inner Carton Quantity** N/A N/A **Inner Carton Bar Code**

N/A Inner Carton Dimensions (L x W x H in.) N/A Inner Carton Dimensions (L x W x H cm.) Inner Carton Weight (lbs) N/A

6 **Master Carton Quantity**

50849489001437 **Master Carton Bar Code** Master Carton Dimensions (L x W x H in.) 25.35 x 13.23 x 13.46 64.4 x 33.6 x 34.2

Master Carton Dimensions (L x W x H cm.) 12.76 Master Carton Weight (lbs) 180

COMPATIBILITY

Dimmers:

Pallet Quantity

Lutron Leviton Cooper DVCL-153PR-WH IPL06 DLC03P-LA SCL-153RR-WH 6672 9573 SCL-153P 9530SG-K

TGCL-153PH-WH LG-600H-WH TG-603PGH-WH

Sensors: N/A

AVAILABLE ACCESSORIES

Model Description Wattage Input Case Voltage Pack

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

> ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754