

# 1.75 gpm multifunction handshower **K-R21498-G**

### **Features**


- Advanced spray engine provides six alternate experiences including four distinct sprays and two combination sprays.
- Full Coverage spray: An encompassing spray with larger water drops and Katalyst<sup>®</sup> air-induction technology for a powerful, even flow.
- Powerful Massage: Targeted, pulsing streams of water that massage and ease muscles. Silk spray: Soft, luxurious water drops rinse away stress.
- Silk + Full Coverage: A warm, full spray with silky drops for total relaxation.
- Powerful Massage + Full Coverage: A warm, targeted stream combined with a full spray.
- Pause: Conserve water while you lather, shave, or shampoo.
  Also convenient for bathing children or pets.
- One-click spray control lets you change sprays with the push of a lever.
- MasterClean™ sprayface resists hard-water buildup and is easy to clean without chemical cleaners.
- 1.75 gpm (gallons per minute) maximum flow rate.
- 1/2" 14 NPT connection.

#### Material

- Premium material construction for durability and reliability.
- Premium KOHLER finishes featuring ScratchShield® technology withstand even the toughest daily use.

### Installation

- No-tool installation -- installs in minutes.
- Box includes: Handshower, handshower cradle, 60" hose.
- Deck-mount holder required for deck-mount installation.
- Bracket or slidebar required for wall-mount installation.





ADA OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel



## **KOHLER**, Faucets

### Rally™

# 1.75 gpm multifunction handshower **K-R21498-G**

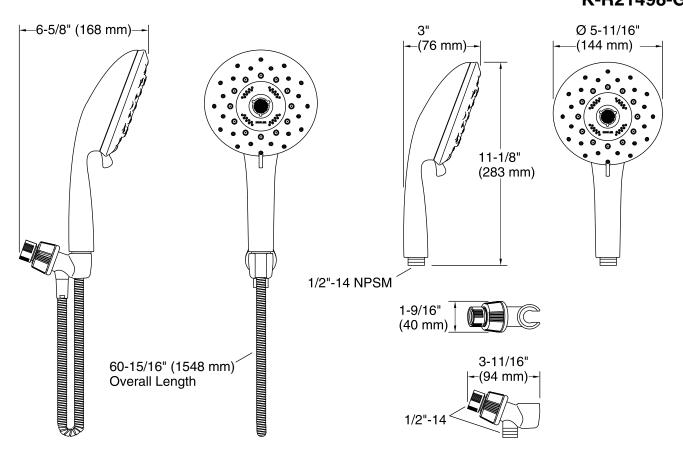

### **Technical Information**

All product dimensions are nominal.

### Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

### **Notes**

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Consult local plumbing officials.

ADA, OBC compliant when installed to the specific requirements of these regulations.

