## **TOTO**<sub>®</sub>

# MW4742044CEFG

## Vespin<sup>®</sup> II Connect+<sup>™</sup> Toilet, 1.28GPF with Washlet<sup>®</sup> C200 Connect+

#### FEATURES

- Concealed supply connection for seamless installation
- High-efficiency Tornado Flush<sup>™</sup> (1.28GPF/4.8LPF)
- Skirted design
- CeFiONtect<sup>™</sup> glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW2044T20 for Washlet features

#### MODELS

- CT474CUFGT20
  Bowl with CeFiONtect glaze
- ST454E Tank and cover only
- ST454ER Tank and cover only, right hand trip lever

#### REQUIRED WASHLET CONNECT+

• SW2044T20 Washlet® C200 Connect+ Fits TOTO Connect+ toilet bowl models only

#### COLORS/FINISHES

• Standard #01 Cotton

#### **OPTIONAL ROUGH-IN**

•	10" rough-in	TSU01W.10R
•	14" rough-in	TSU01W.14R

#### PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush toilet shall be 1.28GPF/4.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model CT474CUFGT20#01.

See TOTO Specification sheet **SW2044T20** for details on required Washlet.



CeFiONtect CONNECt Tornado Flush

#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



### MW4742044CEFG

#### Vespin<sup>®</sup> II Connect+<sup>™</sup> Toilet, 1.28GPF with Washlet<sup>®</sup> C200 Connect+

#### **SPECIFICATIONS**

- 1.28 GPF/4.8LPF Water Use
- Flush System .


Tornado Flush™


- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4" 2-1/8"
- Trap Diameter
- Rough-in 12" (10" or 14" optional)
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material
- Vitreous china Shipping Weight CT474CUFGT20 75lbs.
  - 31.5lbs. ST454E(R) SW2044T20 16.0lbs.
- Shipping Dimensions CT474CUFGT20 30-1/8"L x 16-3/4"W x 22"H ST454E(R) 18" L X 9" W X 16" H SW2044T20 23 1/2"X 19" X 9"
- See Spec sheet SW2044T20 for Washlet details

#### INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

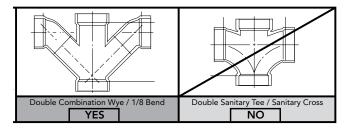

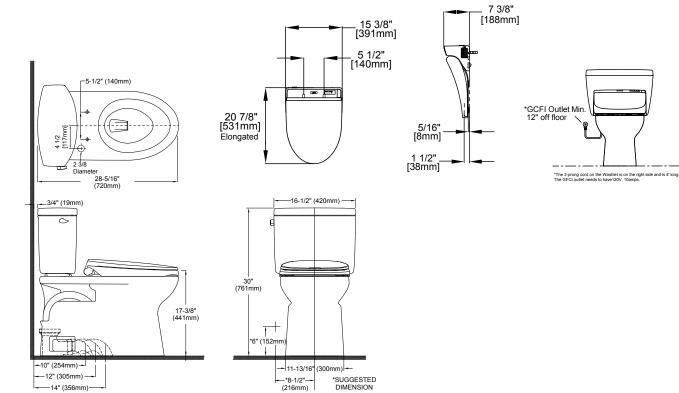

## TOTO

These dimensions and specifications are subject to change without notice