


## GARAGE DOOR BOTTOM SEAL

### Vinyl Replacement

#### Installation:

1. Open the garage door and remove the old insert.
2. With a pair of scissors, trim the replacement to the proper length.
3. Form the product into a "U" with both edges aligned with the grooves of the aluminum frame.
4. Slide the new vinyl into place in both grooves.

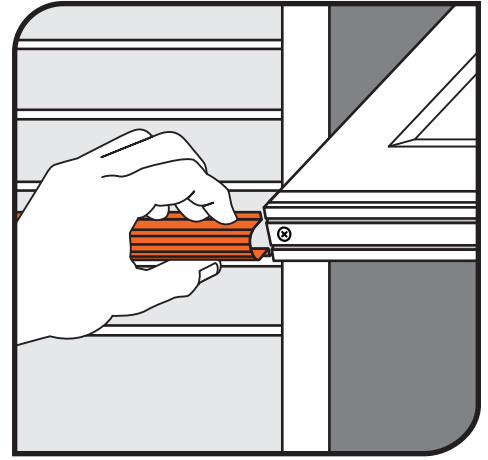

#### Helpful Hints:

1. Soak in warm water for 10-15 minutes.
2. Apply a small amount of liquid soap to the edges.

## Reemplazo de vinilo BURLETE DEL FONDO DE LA PUERTA DE GARAJE

#### Instalación:

1. Abra la puerta del garaje y retire la inserción vieja.
2. Recorte el reemplazo a la longitud apropiada.
3. Forme el producto en una "U" de manera que ambos bordes queden alineados con los acanalamientos del marco.
4. Inserte la tira nueva en su lugar.

#### Consejos útiles:

1. Remoje en agua tibia 10-15 minutos.
2. Si es difícil insertar el producto, aplique una pequeña cantidad de detergente líquido a los bordes.

#### TOOLS NEEDED:

HERRAMIENTAS NECESARIAS:



Follow Us @FrostKing  
or [www.frostking.com](http://www.frostking.com)



Thermwell Products Co., Inc.  
Mahwah NJ 07430 | Sparks NV 89431

Need help or information  
about any Frost King product?

Call **1-877-FROST 20**  
3 7 6 7 8

For videos, instructions, hints and tips  
visit [www.frostking.com/instructions](http://www.frostking.com/instructions)