



TUFTEX[®] DeckDrain[™]

The affordable, attractive deck ceiling and drainage system.
 *Also known as TUFTEX UltraVinyl™ ten foot panels.

BENEFITS

OCTAGONAL PROFILE

NON-FLAMMABLE

ECONOMICAL YET DURABLE


EASY TO INSTALL

LIGHTWEIGHT

NO NEED TO REMOVE DECK BOARDS

TECHNICAL CHARACTERISTICS

Length	10-ft
Width	26-in
Corrugation height	9/16-in
Cutting	Snips, heavy duty scissors (single panel); Circular saw with plywood blade reversed) or fine-tooth hand saw (multiple panels)
Side and end laps	Side laps = 1 corrugation; End laps = 4-in minimum; Seal all with silicone sealant
Fasteners per panel	30

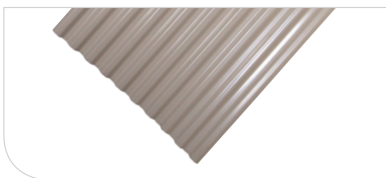

COLOR RANGE



OPAQUE TAN



OPAQUE WHITE

ACCESSORIES



Fasteners
1-1/4-in (100/box)



Slope Building Brackets
4-ft

ADVANTAGES

TUFTEX® DeckDrain™ turns an unused under-deck space into an enhanced living area. The corrugated design carries rainwater away, and creates sheltered, usable space that will look great and add value to your home for years to come.

- Creates a dry, cool, protected area for kids, pets and entertaining
- Builds a ceiling under your deck and puts wasted space to use for storage
- 26-inch wide panels are available in tan or white in 10-foot lengths
- Our slope building brackets and fasteners make installing the panels an easy project




INSTALLATION



Installation is simple with our detailed installation guide.

Building Slope:

To compensate for uneven joists, use the easy 'string' method pictured at the right, before attaching slope building brackets. The 1st bracket is installed on the third joist from the end. Subsequent brackets are attached approximately 1/4" lower on every other joist to create a slope (see diagram below). If your deck is large, pitch it two ways from the center. Minimum Slope = 1" per 10'. If you have a run longer than 10' increase your slope to 2".

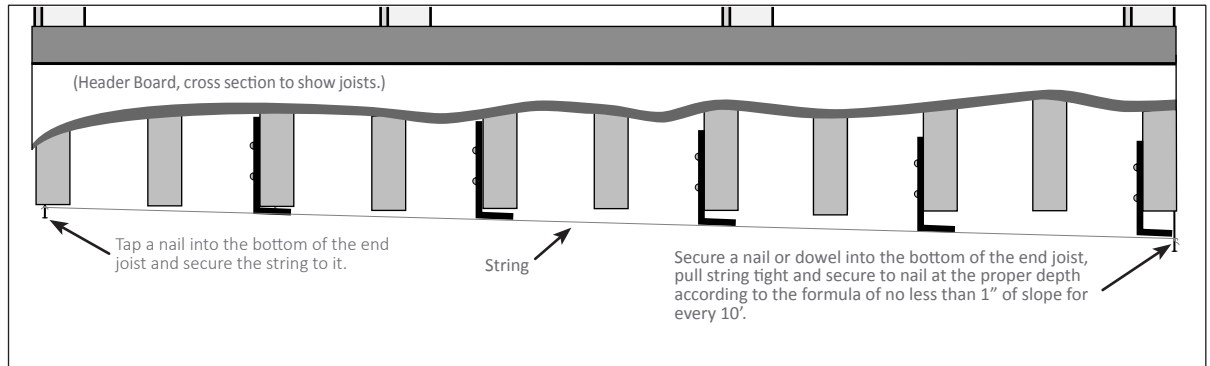

Attaching Panels:

First Joist: Tuflex panel starts here and screws directly into the joist (no slope building bracket needed).

