

ELECTRONIC CONVECTOR

AMIR SERIES

MIRAGE™



THE MOST DISCREET ON THE MARKET!

The new MIRAGE™ electronic convector is the result of a combination of a unique look that is modern and discreet, paired with unquestionable efficiency.

Available with an ultra precise integrated electronic thermostat or no thermostat and in several voltages, the MIRAGE™ is suitable for rooms in both the home and business. The MIRAGE™ blends with any decor with its simple facade and elegant design.

HARMONIZES DISCREETLY WITH ANY DECOR

NEW STYLISH WHITE SATIN FINISH

STURDY ONE-PIECE FRONT PANEL

TOTALLY QUIET

BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)

WITH A BACKLIGHT THAT CAN SERVE AS A NIGHTLIGHT (120 V TO 240 V MODELS)

IDEAL FOR:

KITCHENS, LIVING ROOMS, BEDROOMS,
BASEMENTS, COMMERCIAL BUILDINGS, OFFICES

COLORS

- standard: white, soft white
- luxurious finish: stainless steel (surcharge)
- ORORA (optional): denim blue, midnight blue, turquoise, moss green, canary yellow, red, orange, anodized aluminum paint, gravel gray, charcoal, espresso, almond, black (refer to www.stelpro.com/en-US/orora)

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 20-gauge steel cabinet and front
- the cabinet height improves the chimney effect
- bottom air intake and top air discharge

ELEMENTS

two stainless steel tubular sheathed elements isolated with nylon sleeves reducing expansion and contraction noises

CONTROL

- electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)
- automatic lowering of temperature at night (Automatic mode)
- lock option at a maximum temperature set point (Security mode)

INSTALLATION

- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)



ALSO AVAILABLE: SEMI-PERMANENT INSTALLATION MODEL

QUICK PLUG-IN INTO RESIDENTIAL 120 V OUTLET

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT	WITHOUT THERMOSTAT	POWER		VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	CODE	WATTS	BTU/H	VOLTS	IN.	IN.	LB
AMIR0501	AMIR0501WC	500	2048	120	18	17 1/2	11.75
AMIR0508	AMIR0508WC	500	2048	208	18	17 1/2	11.75
AMIR0502	AMIR0502WC	500/375	2048	240/208	18	17 1/2	11.75
---	AMIR0507WC	500	2048	277	18	17 1/2	11.75
AMIR1001	AMIR1001WC	1000	3413	120	18	23 1/2	14.75
AMIR1008	AMIR1008WC	1000	3413	208	18	23 1/2	14.75
AMIR1002	AMIR1002WC	1000/750	3413	240/208	18	23 1/2	14.75
---	AMIR1007WC	1000	3413	277	18	23 1/2	14.75
---	AMIR1005WC	1000	3413	480	18	23 1/2	14.75
AMIR1501	AMIR1501WC	1500	5119	120	18	29 1/2	17.75
AMIR1508	AMIR1508WC	1500	5119	208	18	29 1/2	17.75
AMIR1502	AMIR1502WC	1500/1125	5119	240/208	18	29 1/2	17.75
---	AMIR1507WC	1500	5119	277	18	29 1/2	17.75
---	AMIR1505WC	1500	5119	480	18	29 1/2	17.75
AMIR2008	AMIR2008WC	2000	6825	208	18	35 1/2	20.75
AMIR2002	AMIR2002WC	2000/1500	6825	240/208	18	35 1/2	20.75
---	AMIR2007WC	2000	6825	277	18	35 1/2	20.75
---	AMIR2005WC	2000	6825	480	18	35 1/2	20.75

Add W for white, SW for soft white or SS for stainless steel (see www.stelpro.com/en-US/orora for optional colors and contact your °STELPRO representative for more information)
 Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.
 --- not available

MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)

BUILT-IN THERMOSTAT	POWER	VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	WATTS	VOLTS	IN.	IN.	LB
AMIR1501PW	1500	120	18	29 1/2	17.75


ACCESSORIES

PRODUCT	DESCRIPTION
MIRRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
MIRRE156*	built-in electronic low voltage relay [6 A @ 600 V]
MIRRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Factory installed

TECHNICAL DRAWINGS

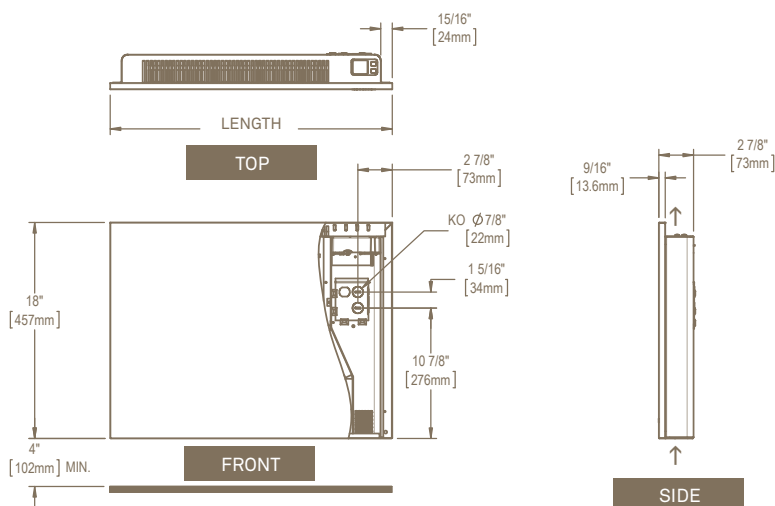

BUILT-IN ELECTRONIC THERMOSTAT
 AVAILABLE FOR THE 120 V TO 240 V MODELS