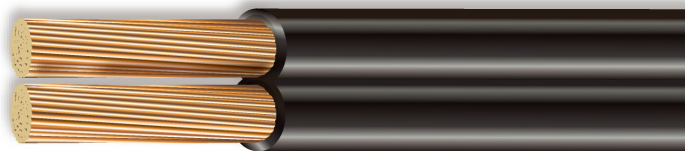


Low-Voltage Underground

Landscape Lighting Cable

**Listed for
Outdoor Use****150 Volts for UL
30 Volts for cUL****Rated -20°C to 60°C**

APPLICATIONS

Cerrowire's Low-Voltage (Low-Energy) Underground Landscape Lighting Cable is designed for landscape, security, and outdoor accent lighting applications not to exceed 150 volts. Landscape Lighting Cable is sunlight-resistant, suitable for direct burial, and for use at temperatures between -20°C and 60°C. 16/2 and 14/2 in 50', 100' and 500' lengths. 12/2 in 100', 200' and 500' lengths. 10/2 in 500' length.

ASSEMBLY

Two bare annealed flexible stranded copper conductors are duplexed in a flat construction to promote easy teardown during installation and insulated/jacketed in black premium-grade PVC with an SPT ripcord.

INDUSTRY STANDARDS/CERTIFICATIONS

UL® 1493

UL® Underground Low-Energy Circuit Cable for Outdoor Lighting

C(UL) Low-Voltage Landscape Lighting (LVLL)

EU RoHS Directive

SURFACE PRINT

(UL) E236055 2/C 14AWG (2.08mm²)FT2 + 60°C 150V - C(UL) (LVLL 30V)
ME-2 LOW VOLTAGE LANDSCAPE LIGHTING WIRE ULECC

©2010, Cerro Wire LLC
All Rights Reserved



MADE IN THE USA

cerrowire

Electrical Division: 800.523.3869 | FAX 877.877.9563
Consumer Markets Division: 866.572.3776 | FAX 812.793.2626
www.cerrowire.com

A Marmon Wire & Cable/
Berkshire Hathaway Company

Low-Voltage Underground Landscape Lighting Cable

PART NUMBER	NO. OF COND.	AWG SIZE	LENGTH OF CORD (FT.)	COND. STRND.	NOMINAL INSULATION THICKNESS		NOMINAL OVERALL DIAMETER		POWER RATING ⁽¹⁾			PKG. PER CTN.	APPROX. WEIGHT PER CTN. (LBS) ⁽⁵⁾	CARTON DIM. (HxWxD)	UPC NUMBER
					INCHES	MM	INCHES	MM	VOLTS	AMPS	WATTS				
241-1202B	2	16	50	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	19	2850	12	27	8.5x12.25x14	048243319206
241-1202C	2	16	100	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	19	2850	12	44	9.5x14x17	048243319329
241-1202J	2	16	500	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	19	2850	1	19	10.625x10.625x6.313	048243319305
241-1402B	2	14	50	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	27	4050	8	25	8.5x12.25x14	048243319480
241-1402C	2	14	100	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	27	4050	8	45	9.5x14x17	048243319466
241-1402J	2	14	500	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	27	4050	1	37	10.625x10.625x8.25	048243319404
241-1602C	2	12	500	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	36	5400	1	58	10.625x10.625x8.25	048243319527
241-1602F	2	12	50	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	36	5400	8	30	8.5x12.25x14	048243319589
241-1602J	2	12	100	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	36	5400	8	59	9.5x14x17	048243319503
241-1802J	2	10	500	104/30	0.045	1.14	0.400x0.200	10.16x5.08	150	47	7050	1	52	12x10x12	048243319602

⁽¹⁾ Amps and watts are offered ONLY as a guide to the end user. ⁽⁵⁾ Actual shipping weight may vary.

PACKAGE CODE	B	C	F	J
SIZE	50' SPOOL	100' SPOOL	500' SPOOL	1000' SPOOL
16 & 14 STRANDED	X	X		X
12 STRANDED		X	X	X
10 STRANDED				X