












⚠ WARNING: This Engine Starting Procedure is not a substitute for reading the operator's manual. To reduce the risk of injury, user must read and understand operator's manual before using this product.


ENGINE STARTING PROCEDURE

- 1  50:1 Ratio = Mix 2.6 oz 2-cycle lubricant with 1 gallon of fresh gasoline in separate gas container. SHAKE. Pour into fuel tank.
- 2  Slowly press the primer bulb 10 times.
NOTE: After the 10th press, fuel should be visible in the primer bulb. If it is not, continue to press the primer until you see fuel in the bulb.
- 3  Unlock the cruise control (set to Idle)
- 4  Set the choke lever to "START" position A.
- 5  Pull starter grip and rope sharply until engine attempts to run. Do not pull starter grip more than 5 times.
- 6  Set the choke lever to the "RUN" position B.
- 7  Pull the starter grip and rope until the engine runs. Do not pull starter grip more than 6 times.
NOTE: If engine does not start, return to the START position A and repeat the steps that follow.

- Warm Starting**
- 1  Set the choke lever to the "RUN" position B.
 - 2  Lock the cruise control (set to full throttle)
 - 3  Pull starter grip sharply until engine attempts to run. Do not pull starter grip more than 4 times.

To Stop:

- 1  Depress the STOP switch to the stop position "O".

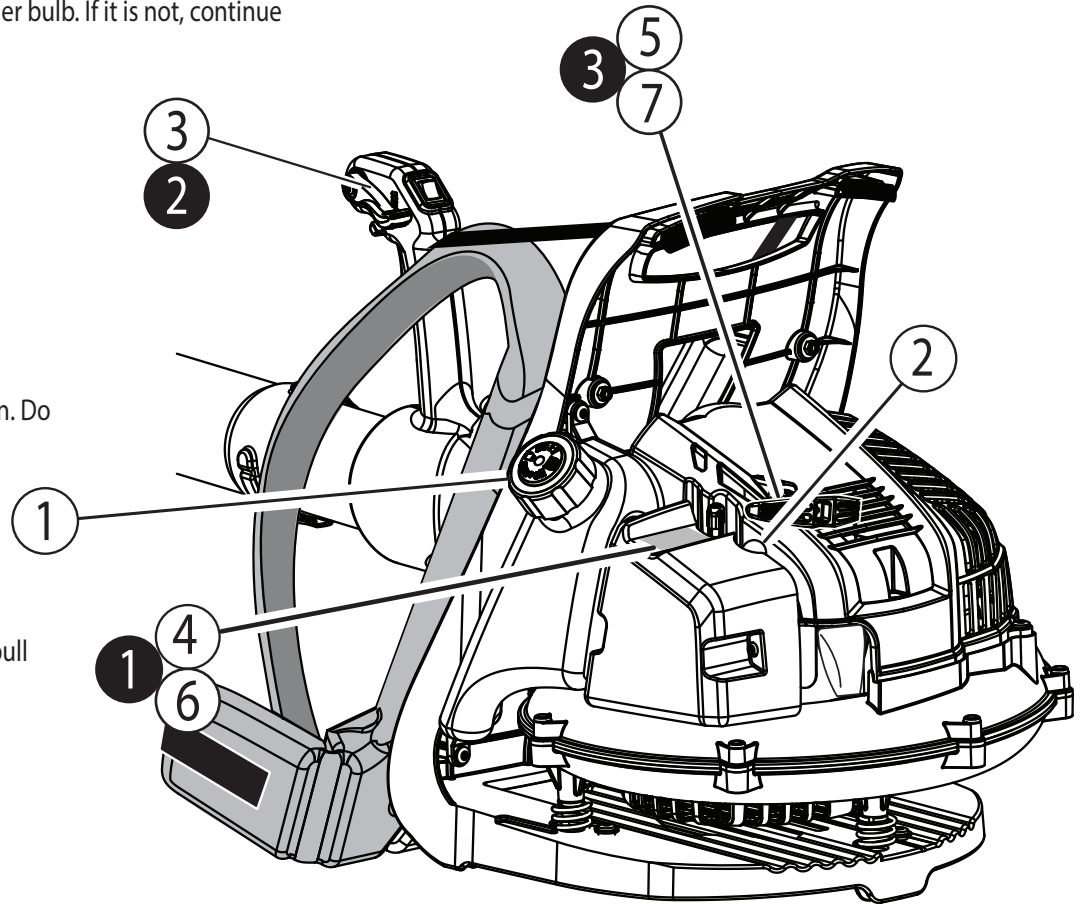

Go to www.ryobitools.com and register your new tool on-line. For any questions about operating or maintaining your product, call the Ryobi® Help Line! Your Product has been fully tested prior to shipment to ensure your complete satisfaction. Troubleshooting tips are also available in your operator's manual.