

# Pont Neuf Collection

Single-Handle Lavatory Faucet



## Installation/Installation/Instalación

### **CUSTOMER SERVICE**

**TOLL-FREE 1-877-482-5422**


**MFF-PNC1-CP - Polished Chrome**

**MFF-PNC1-BN - PVD Brushed Nickel**

**MFF-PNC1-ORB - Oil Rubbed Bronze**



### Tools You Will Need / Outils dont vous aurez besoin / Herramientas necesarias



Phillips Screwdriver  
Tournevis Phillips  
Destornillador cruciforme



Pipe Tape  
Ruban pour tuyau  
Cinta selladora para rosca



Groove joint pliers  
Pince multiprise  
Pinzas ajustables

### **SAFETY TIPS**

- If you use soldering for the installation of the faucet, the seats, cartridges and washers will have to be removed before using flame. Otherwise, warranty will be void on those parts.
- Cover your drain to avoid losing parts.
- 0°C~55°C.

### **CONSIGNES DE SÉCURITÉ**


- Si vous posez le robinet par brasage, il est essentiel de retirer les sièges, les cartouches et les rondelles avant d'appliquer la flamme, faute de quoi la garantie sur ces pièces sera annulée.
- Couvrez le drain pour ne pas perdre des pièces.
- 0°C~55°C.

### **CONSEJOS DE SEGURIDAD**

- En el caso de utilizar soldadura para instalar el grifo, remueva los asientos, cartuchos y arandelas antes de usar la llama. De lo contrario, se anulará la garantía para esos componentes.
- Tape la boca del desagüe para prevenir la pérdida de piezas pequeñas.
- 0°C~55°C.


**MFF-PNC1-CP**  
**MFF-PNC1-BN**  
**MFF-PNC1-ORB**

**1**

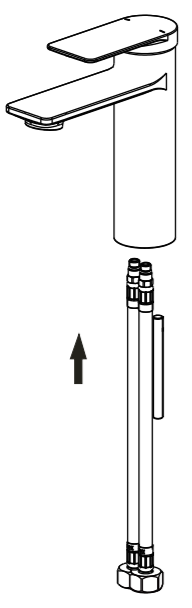


Install the water inlet hose to the faucet.

**2**

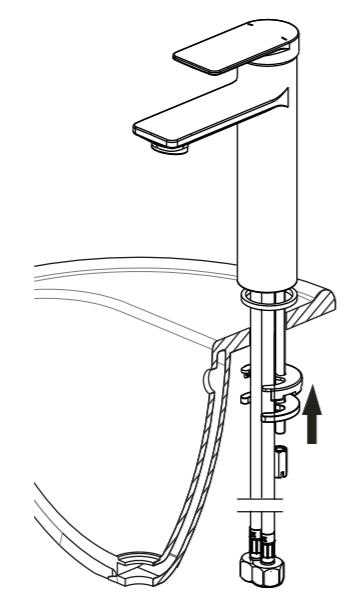

Install the faucet to the mounting hole and fasten with the fastener seat.

**3**

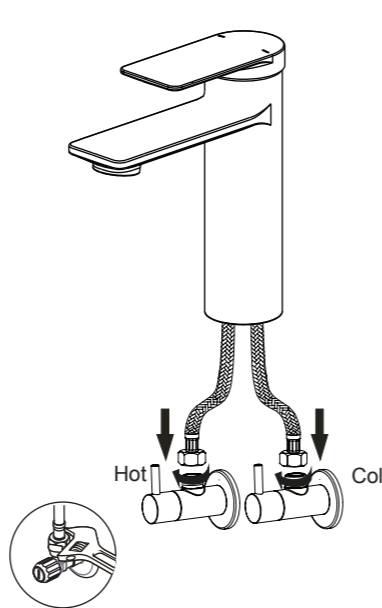

Install the water inlet hoses and tighten it with a wrench.

NO.	Description	Part No.
1	Handle	5C0070000CP/AP/HA/HBW0A0
2	Dome	5L0019100CP/AP/HA/HBW0
3	O-RING	5R0R0004PL
4	Cartridge Nut	5T1C003101NT0
5	Cartridge	5D8001100PL0
6	Sleeve	5L0C008401PL0
7	Aerator	5E0004100PL0
8	Set Screw	5T0F0149NT
9	Allen Key 2.5mm	51002812NT
10	Washer	5R4P0159PL
11	Mounting Hardware	5Q0M0323NT

