


Features

- Acrylic
- Integral apron with removable access panel
- 1 hp blower with electronic control
- Left or right drain
- Blower motor is supplied with a grounding-type plug-in cord
- 120 BubbleMassage™ airjets
- Integral tile flange
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Armrests
- 72" (182.9 cm) x 36" (91.4 cm) x 19" (48.3 cm)

6' (1.8 m) BUBBLEMASSAGE™ BATH WITH AIRJETS K-1124-GLA ALSO K-1124-GRA

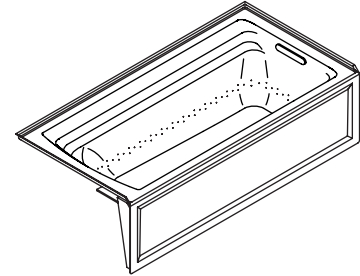

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC IGC 171
- Underwriters Laboratories (UL)

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1124-GLA	Integral apron, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1124-GRA	Integral apron, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7272	Drain – above or through-the-floor installation	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Recommended Accessories			
K-1446	Remote blower installation kit		NA
Optional Accessories			
K-9529	Removable bath seat		<input type="checkbox"/> 0

Product Specification

The acrylic bath with airjets shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 19" (48.3 cm) in height. Bath shall feature an integral apron with removable access panel and integral tile flange. Bath shall have a 1 hp blower motor with 300 W heater and an electronic user control. The blower motor shall have a grounding-type plug-in cord. Bath shall have 120 BubbleMassage™ airjets. Bath shall be available with left or right drain. Bath shall have slotted overflow for maximum bathing depth and low threshold height. Bath shall have an integral lumbar support and armrests. The bath with airjets shall be Kohler Model K-1124-_____-_____.

ARCHER™

Technical Information

Fixture*:	
Bathing well	
Basin area bottom	51-3/8" (130.5 cm) x 21" (53.3 cm)
Basin area top	64-1/2" (163.8 cm) x 30-1/2" (77.5 cm)
Weight	115 lbs (52.1 kg)
To overflow	
Water depth	15" (38.1 cm)
Capacity	72 gal (273 L)
* Approximate measurements for comparison only.	

Blower motor:	Heater	V	Hz	A
1 hp	300 W	120	60	5

Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (61 cm) grounding-type plug-in cord.	

Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 42 lbs/square foot (201 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

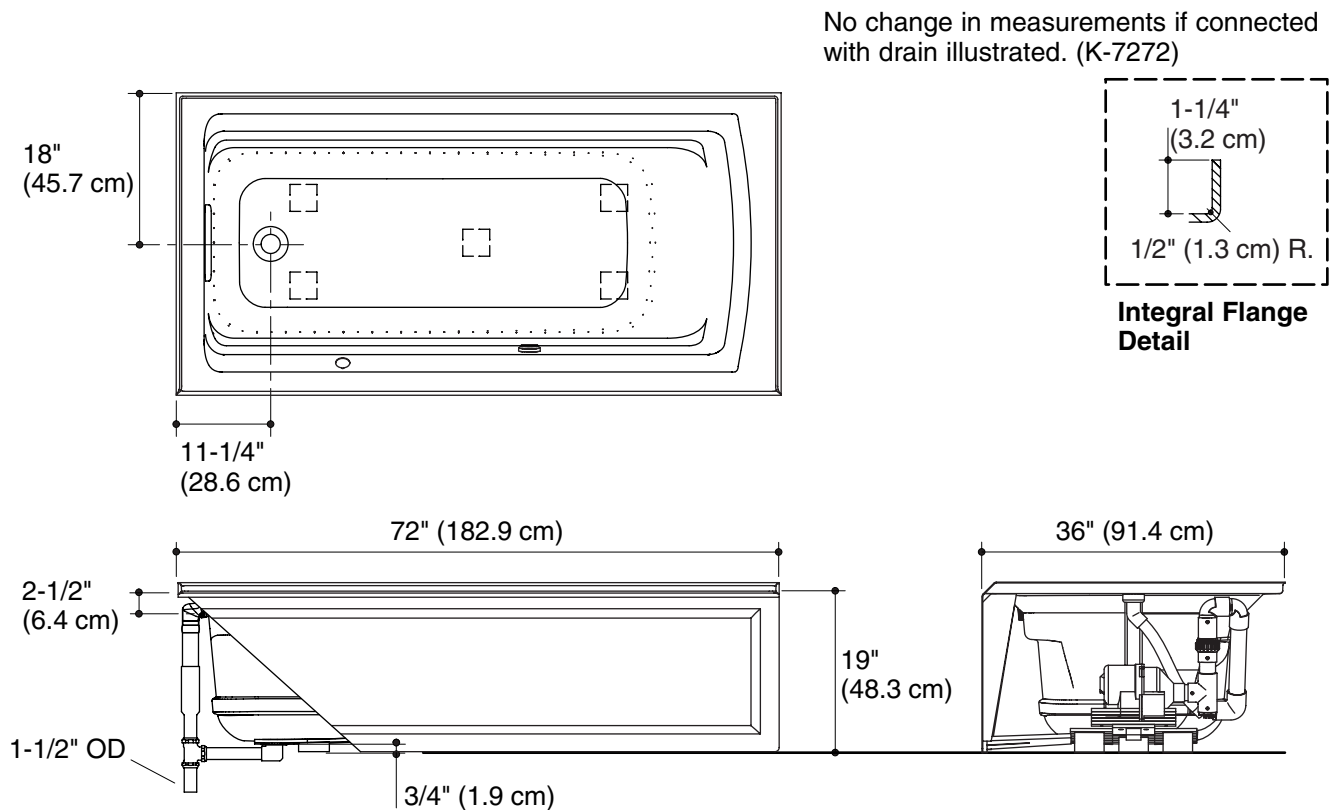

Product Diagram

ARCHER™ 6' (1.8 m) BUBBLEMASSAGE™ BATH WITH AIRJETS

Page 2 of 2
1071369-4-C

THE BOLD LOOK
OF **KOHLER**®