Page 1 of 2



Charlestown[™]













Model# 3552607 - Chrome Premier Single-Handle Kitchen Faucet

At a Glance:

- All-metal construction with lead-free brass waterways
- Single metal lever handle
- · Wear-resistant ceramic disc cartridge
- Provides CEC-compliant flow rate of 1.75 GPM
- High-rise swivel spout
- Includes color-matched, metal side spray with 48" Snap-Connect spray hose
- Fits decks up to 2-1/4" thick
- Suitable for 2- or 4-hole installations (8" on-center)
- Includes color-matched optional deck plate with tie-downs
- 30" nylon supply lines with 3/8" compression connections
- · Certified lead-free

Compliance:

- Complies with ADA (Americans with Disabilities Act)
- Complies with requirements of ASME A112.18.1
- Complies with toxicity requirements of NSF 61-9 and CA Proposition 65
- Meets lead-free requirements of California Health & Safety Code 116875 (AB1953)
- Meets lead-free requirements of NSF 372
- · Complies with requirements of CSA B125

Warranty:

Limited Lifetime Warranty

*Refer to Premier Faucet warranty program for further details and restrictions.

Faucet Features:

Dimensions (WxHxD)

10-1/4" x 13-1/8" x 11-1/8"

Finish Chrome

Platform Brass

Flow Rate 1.75 GPM

Flow Restriction Type FR (Fixed Restrictor)

Centers|Holes 8"|2- or 4-Hole

Handle Screw Phillips Head x 8-32

Handle Type | Single Lever

Handle Material Metal

Control | Ceramic Disc Cartridge

Max. Deck Thickness 2-1/4"

Aerator Size Regular (55/64"-27 Female)

Spout Reach 9-1/8"

Spout Shape Round Tube

Spout Material Brass

Spout Collar|Cap | Metal

Spray Configuration | Side Spray (Included)

Spray Material Metal

Spray Finish Color-Matched
Spray Hose Nylon-Braided
Spray Connection Snap-Connect

Optional Deck Plate | Solid 3-Hole Plate

Deck Tie-Downs Included
Putty Plate Included

Package Size (WxDxH) 27-3/8" x 10-5/8" x 3"

Package Weight 7.5 lbs.

Case Size (WxDxH) 28-3/8" x 22" x 10-1/4"

Case Weight 47.8 lbs.

Listings:

- IAPMO (International Association of Plumbing & Mechanical Officials)
- cUPC (Uniform Plumbing Code-US & CA)
- IAPMO-Certified Lead-Free
- CSA-US (Canadian Standards Association-US & CA)
- DOE (Department of Energy)
- CEC (California Energy Commission)
- Commonwealth of Massachusetts

Optional Accessories:

- 122006 Sink Strainer, Brushed Nickel
- 120442 Soap Dispenser, Chrome
- 3570053 Snap-Connect Plug (for use without side spray)

For additional information, contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com.






Page 2 of 2

Installation Configurations:



Dimensional Drawing:

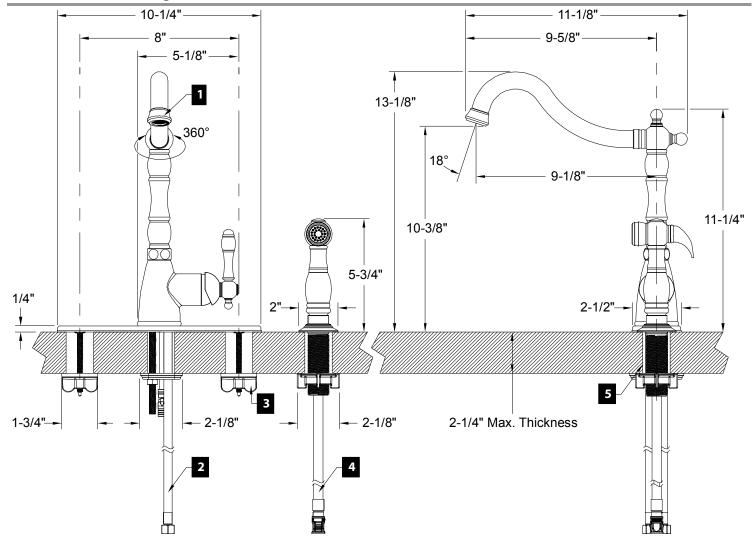

- 1) 55/64"-27 female threaded aerator shell
- 2) 30" nylon supply lines with 3/8" compression connections for easy installation (28" usable length)
- 3) 1/4"-20 threaded tie-downs
 Plastic wing nuts for easy, tool-free installation (included)
- 4) 48" nylon spray hose with Snap-Connect for easy installation
- 5) Fits standard hole openings 1-1/4" to 1-1/2" in diameter

Δ

For additional information, contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com.