



MODEL N° 1301

OWNER'S MANUAL

Keep this Product ID Number and use when contacting Customer Service:

REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at www.lifetime.com and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!

Save this owner's manual for future reference and in the event that the manufacturer has to be contacted.

****U.S. and Canada customers ONLY****

IF ASSISTANCE IS NEEDED,

DO NOT CONTACT THE STORE!

CALL OUR CUSTOMER SERVICE DEPARTMENT at

1 (800) 225-3865

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)

Call or visit our Web site for Saturday hours

Lifetime Products, Inc.

PO Box 160010 • Freeport Center, Bldg. D-11 Clearfield, Utah 84016-0010

For customers outside the U.S. or Canada, please contact the store for assistance.



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

To ensure safety, do not attempt to assemble this product without reading and following all instructions carefully. Check the entire box and inside all packing materials for parts and/or additional instruction material. Before beginning assembly, identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document. Proper and complete assembly, use and supervision are essential for proper orientation and to reduce the risk of accident or injury. A high probability of serious injury exists if this product is not installed, maintained, and/or operated properly. Failure to comply with any of the warnings in this instruction manual may result in serious personal injuries such as cuts, broken bones, nerve damage, paralysis, brain injury, or death. Failure to comply may also result in property damage. Please heed all warnings and cautions.

- If using a ladder during assembly, use extreme caution.
- Two capable adults are recommended for this operation.
- Check base daily for leakage. Leaks may cause product to fall.
- Assemble the pole sections properly. Failure to do so could cause the pole sections to separate during play or transport.

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.

BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.



Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.



Test fit all Bolts by inserting them into their respective holes. If necessary, carefully scrape away any excess powder coating buildup from inside the holes. Do not scrape away all of the powder coating. Bare metal may rust. You may need to pound some Bolts into place with a hammer or mallet.



TOOLS AND PARTS REQUIRED FOR THIS ASSEMBLY

1/2" Wrench




(2)

7/16" Wrench



(1)

Phillips Screwdriver



(1)

3/8" Socket Wrench




(1)

Pliers




(1)

Adjustable Wrench



(1)

Rubber Mallet



(1)

Water Hose



(1)

Funnel



(1)

Sand




(319 lb)

Hammer



(1)



****Two adults required to complete assembly****

Only adults should set up the product. Do not allow children in the setup area until assembly is complete.

ASSEMBLY GUIDES

Refer to the following areas throughout the instructions to assist in the assembly process:

This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



Note:



These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.



CAUTION



WARNING



PARTS LIST

<u>ID</u>	<u>Item Description</u>	<u>Qty</u>	<u>✓</u>
ALH	Top Pole	1	<input type="checkbox"/>
ALE	Bottom Pole	1	<input type="checkbox"/>
CMZ	Slide Collar	1	<input type="checkbox"/>
AJK	Right Backboard Bracket	1	<input type="checkbox"/>
AJJ	Left Backboard Bracket	1	<input type="checkbox"/>
AJI	Backboard	1	<input type="checkbox"/>
ALX	Rim	1	<input type="checkbox"/>
AKZ	Net	1	<input type="checkbox"/>
AJM	Base	1	<input type="checkbox"/>
ALI	Pole Brace	2	<input type="checkbox"/>
AMU	Wheel	2	<input type="checkbox"/>
AJC	1/2" x 15 3/4" Axle	1	<input type="checkbox"/>
AJE	1/2" x 7" Axle	1	<input type="checkbox"/>
AYU	5/16" Hex Knob	3	<input type="checkbox"/>
CNB	Pole Spacer	2	<input type="checkbox"/>
AOX	Rim Support Channel	1	<input type="checkbox"/>
AEF	Base Plug	2	<input type="checkbox"/>
AMT	Warning Sticker (Applied to Middle Pole)	1	<input type="checkbox"/>

HARDWARE LIST


<u>ID</u>	<u>Item Description</u>	<u>Qty</u>	<u>✓</u>
<i>Pole Assembly Hardware (1066286)</i>			
AOL	5/16" x 3 1/4" Carriage Bolt	2	<input type="checkbox"/>
AAN	5/16" Cap Nut	1	<input type="checkbox"/>
ABD	5/16" Washer	1	<input type="checkbox"/>
AYT	5/16" Hex Nut	1	<input type="checkbox"/>
ADS	1/4" x 3/4" Screw (will not be used)	1	<input type="checkbox"/>
<i>Pole to Base Assembly Hardware (1047792)</i>			
AAO	5/16" Nylock Nut	2	<input type="checkbox"/>
ABD	5/16" Washer	4	<input type="checkbox"/>
CNA	5/16" x 4 1/2" Tap Bolt	1	<input type="checkbox"/>
ABN	1/2" x 1/8" Spacer	2	<input type="checkbox"/>
AYT	5/16" Hex Nut	1	<input type="checkbox"/>
BKH	5/16" x 1 1/4" Hex Bolt	2	<input type="checkbox"/>
<i>Backboard to Pole Assembly Hardware (1047789)</i>			
APK	3 1/2" U-Bolt	1	<input type="checkbox"/>
APG	5/16" x 3 1/4" Hex Bolt	2	<input type="checkbox"/>
APN	5/16" Flange Lock Nut	2	<input type="checkbox"/>
AAC	5/16" x 1 3/4" Hex Bolt	2	<input type="checkbox"/>
ABK	5/16" Flange Nylock Nut	4	<input type="checkbox"/>
ABD	5/16" Washer	4	<input type="checkbox"/>
AAJ	5/16" Hex T-Nut	2	<input type="checkbox"/>
APJ	5/16" x 3/4" Hex Bolt	2	<input type="checkbox"/>

HARDWARE LIST

ID	Item Description	Qty	✓
	Cement Anchor Hardware (1047794)		
AAF	3/8" Washer	2	<input type="checkbox"/>
CHQ	3/8" x 1" Hex Bolt	2	<input type="checkbox"/>
ABD	5/16" Washer (will not be used)	2	<input type="checkbox"/>
AQQ	3/8" Concrete Drop-in Anchor	2	<input type="checkbox"/>
CNC	6" Chain	2	<input type="checkbox"/>


PARTS IDENTIFIER

Parts shown at 10% of Actual Size




ALH (x1)
Top Pole

*Do not remove Top Pole from Bottom Pole until instructed



ALE (x1)
Bottom Pole


*Warning Sticker applied to side not shown




ALI (x2)
Pole Brace




AJJ (x1)
Left Backboard Bracket




AJK (x1)
Right Backboard Bracket

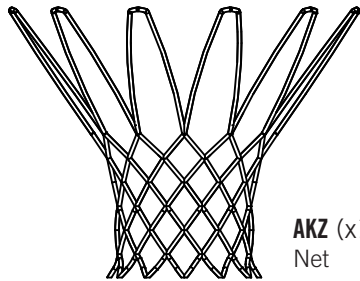


AKZ (x1)
Net

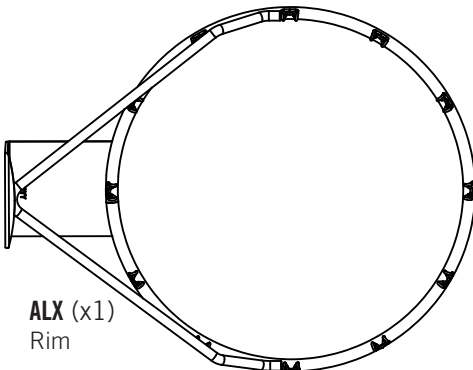

ALX (x1)
Rim




AJC (x1)
1/2" x 15 3/4" Axle




AJE (x1)
1/2" x 7" Axle

PARTS IDENTIFIER


Part shown at 25% of Actual Size



AMU (x2)
Wheel



CMZ (x1)
Slide Collar




AYU (x3)
5/16" Hex Knob




AOX (x1)
Rim Support Channel

Part shown at Actual Size

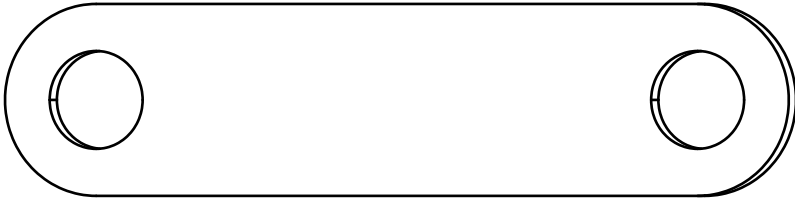


CNB (x2)
Pole Spacer




AEF (x2)
Base Plug

Parts shown at 5% of Actual Size

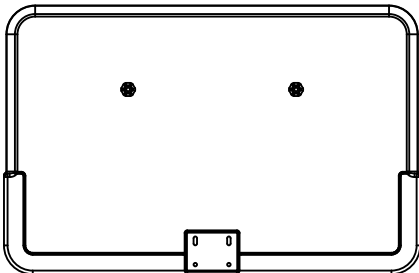

AJI (x1)
Backboard

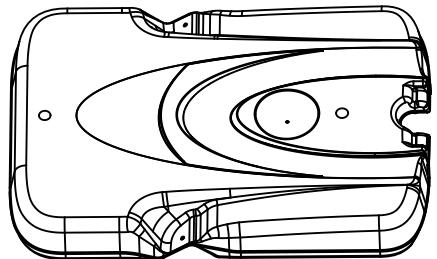


AJM (x1)
Base


HARDWARE IDENTIFIER

POLE ASSEMBLY HARDWARE


Hardware shown at Actual Size

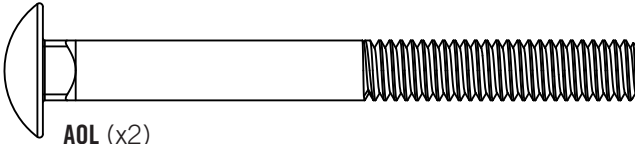


AOL (x2)
5/16" x 3 1/4" Carriage Bolt




ABD (x1)
5/16" Washer



ADS (x1)
1/4" x 3/4" Screw
(Not used)




AYT (x1)
5/16" Hex Nut




AAN (x1)
5/16" Cap Nut

POLE TO BASE ASSEMBLY HARDWARE


Hardware shown at Actual Size



CNA (x1)
5/16" x 4 1/2" Tap Bolt




BKH (x2)
5/16" x 1 1/4" Hex Bolt




ABN (x2)
1/2" x 1/8" Spacer



AYT (x1)
5/16" Hex Nut



AAO (x2)
5/16" Nylock Nut




ABD (x4)
5/16" Washer


HARDWARE IDENTIFIER

BACKBOARD TO POLE ASSEMBLY HARDWARE


Hardware shown at Actual Size




APG (x2)
5/16" x 3 1/4" Hex Bolt




ABD (x4)
5/16" Washer



AAC (x2)
5/16" x 1 3/4" Hex Bolt




APJ (x2)
5/16" x 3/4" Hex Bolt




AAJ (x2)
5/16" Hex T-Nut



ABK (x4)
5/16" Nylock Flange Nut



APN (x2)
5/16" Flange Lock Nut

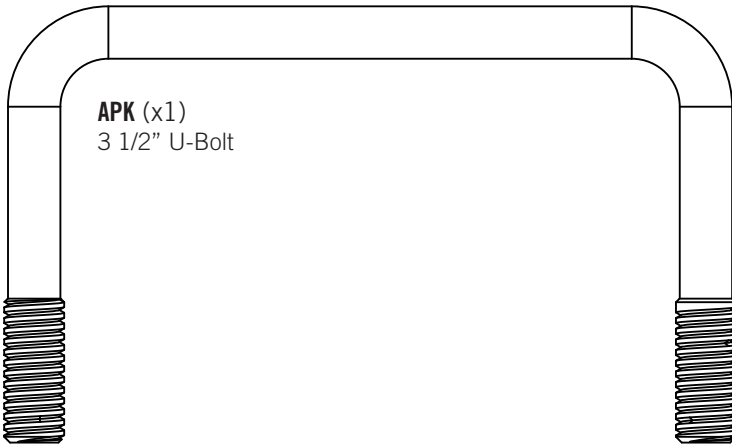


APK (x1)
3 1/2" U-Bolt


HARDWARE IDENTIFIER

CONCRETE ANCHOR ASSEMBLY HARDWARE


Hardware shown at Actual Size




CHQ (x2)
3/8" x 1" Hex Bolt




AQQ (x2)
3/8" Concrete
Drop-in Anchor



AAF (x2)
3/8" Washer



CNC (x2)
6" Chain (not to scale)




ABD (x2)
5/16" Washer
(Not used)


STEP 1 POLE ASSEMBLY

HARDWARE REQUIRED


Hardware shown at Actual Size

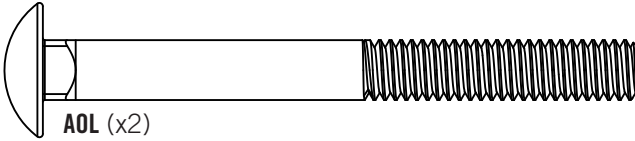


AOL (x2)
5/16" x 3 1/4" Carriage Bolt




AYT (x1)
5/16" Hex Nut



ADS (x1)
1/4" x 3/4" Screw
(Not used)




AAN (x1)
5/16" Cap Nut



ABD (x1)
5/16" Washer

PARTS REQUIRED

Parts shown at 10% of Actual Size



ALH (x1)
Top Pole


*Do not remove Top Pole from Bottom Pole until instructed



ALE (x1)
Bottom Pole

*Warning Sticker applied to side not shown

Part shown at 25% of Actual Size



AYU (x1)
5/16" Hex Knob

TOOLS REQUIRED



1/2" Wrench




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

NO TOOLS OR HARDWARE REQUIRED FOR THIS PAGE

SEC

1.1

While the **Top Pole (ALH)** is still inside the **Bottom Pole (ALE)**, pull the plastic off the Top Pole. It may be necessary to loosen the Poles before pulling out the plastic.

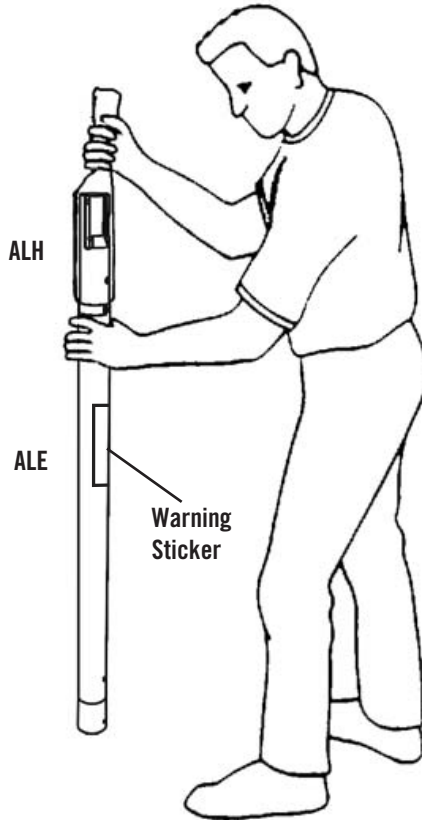


Note: Make sure the crimped side of the Top Pole is on the same side as the Warning Sticker (AMT) on the Bottom Pole.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




1/2"

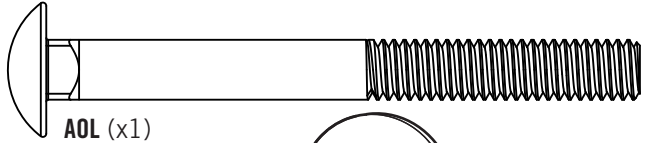

AOL (x1)



AAN (x1)




ABD (x1)

SEC

1.2

Slide the **Top Pole (ALH)** far enough out of the **Bottom Pole (ALE)** so that it does not obstruct the holes at the bottom of the Bottom Pole. Then attach the hardware indicated in the location shown.

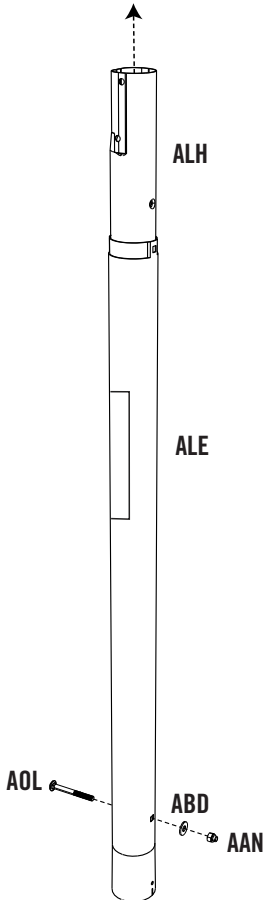


WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


NO TOOLS REQUIRED FOR THIS PAGE

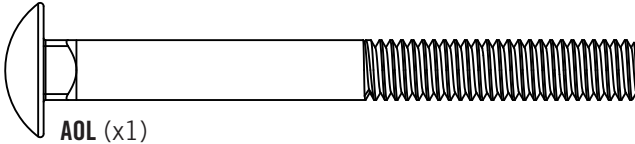

SEC

1.3


Insert a **5/16" Hex Nut (AYT)** into the **5/16" Hex Knob (AYU)** as shown. It may be necessary to use the **5/16" x 3 1/4" Carriage Bolt (AOL)** to place the Nut in the Knob. Then position the **Top Pole (ALH)** at its lowest height and attach the Knob to the Top Pole and **Bottom Pole (ALE)** with the hardware shown.

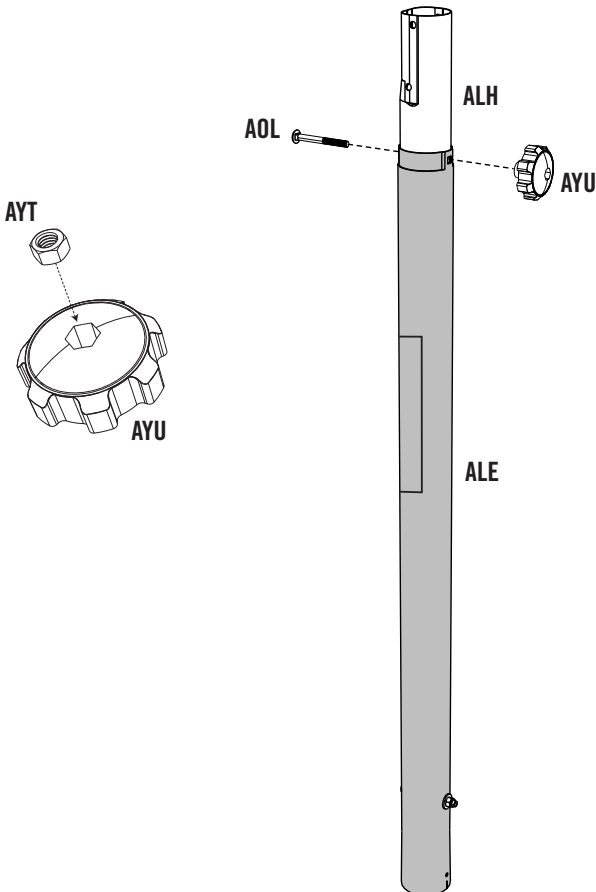


SEC 2 POLE TO BASE ASSEMBLY

HARDWARE REQUIRED


Hardware shown at Actual Size




BKH (x2)
5/16" x 1 1/4" Hex Bolt



AYT (x1)
5/16" Hex Nut




ABD (x4)
5/16" Washer

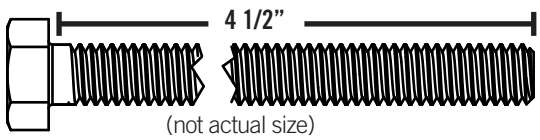


CNA (x1)
5/16" x 4 1/2" Tap Bolt

(not actual size)



AAO (x2)
5/16" Nylock Nut




ABN (x2)
1/2" x 1/8" Spacer

SEC 2 POLE TO BASE ASSEMBLY


PARTS REQUIRED

Part shown at 5% of Actual Size

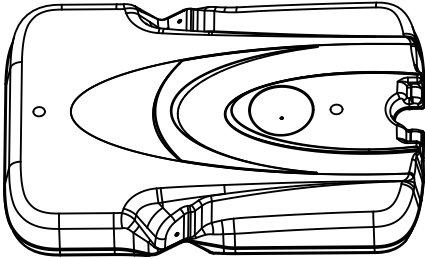


AJM (x1)
Base

Part shown at 25% of Actual Size





AMU (x2)
Wheel




AYU (x2)
5/16" Hex Knob

Parts shown at 10% of Actual Size

ALI (x2)
Pole Brace



AJC (x1)
1/2" x 15 3/4" Axle



AJE (x1)
1/2" x 7" Axle

Parts shown at Actual Size



CNB (x2)
Pole Spacer

TOOLS REQUIRED


NO TOOLS REQUIRED FOR THIS SECTION

Finger Tighten All Hardware




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


NO TOOLS REQUIRED FOR THIS PAGE




BKH (x2)



AAO (x2)



ABD (x4)




ABN (x2)

SEC

2.1

Attach the flattened end of the **Pole Brace (ALI)** to the **Base (AJM)** with the hardware shown. Only finger tighten the hardware.

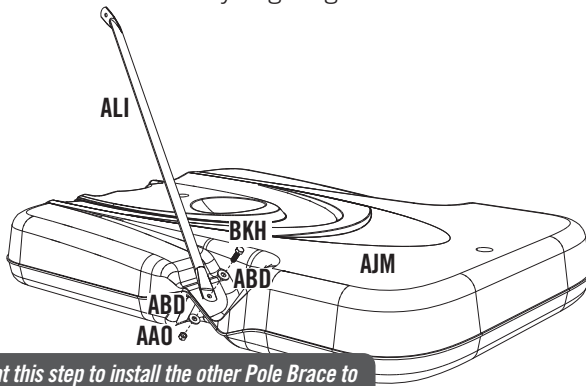


Note: Repeat this step to install the other Pole Brace to the other side of the Base.

SEC

2.2

Slide the **1/2" x 15 3/4" Axle (AJC)** through the holes at the end of the **Bottom Pole (ALE)** as shown. Slide the **1/2" x 7" Axle (AJE)** through the second set of holes at the end of the Bottom Pole as shown. Then slide two **Pole Spacers (CNB)** over the Axles as indicated. Place the **Wheels (AMU)** and **1/2" x 1/8" Spacers (ABN)** onto the 1/2" x 15 3/4" Axle.

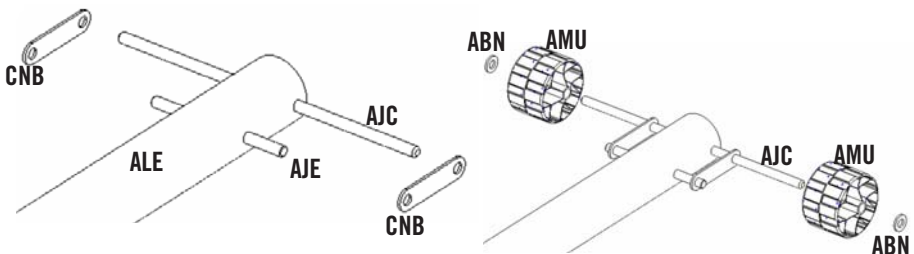




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

NO TOOLS OR HARDWARE REQUIRED FOR THIS PAGE

SEC

2.3


Place the Pole assembly on the ground with the crimped end of the **Top Pole (ALH)** facing down. Position the **1/2" x 15 3/4" Axle (AJC)** under the bottom slots of the **Base (AJM)** as shown, and step onto the Base so the Axle snaps into the slots. Then rotate the Pole assembly upward so that the **1/2" x 7" Axle (AJE)** snaps into the upper slots of the Base as shown.

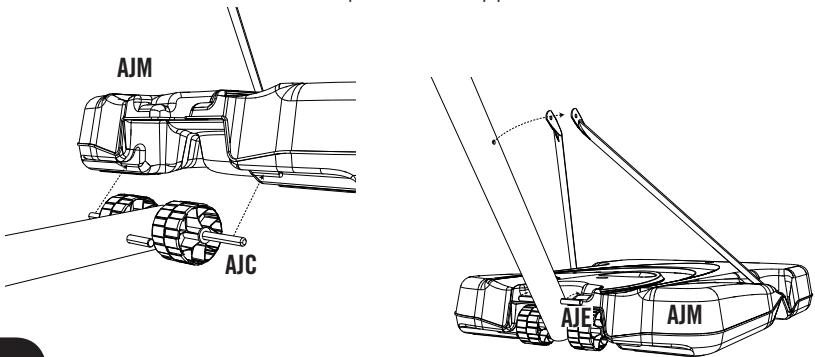

SEC

2.4


Snap the **Slide Collar (CMZ)** onto the **Bottom Pole (ALE)**.

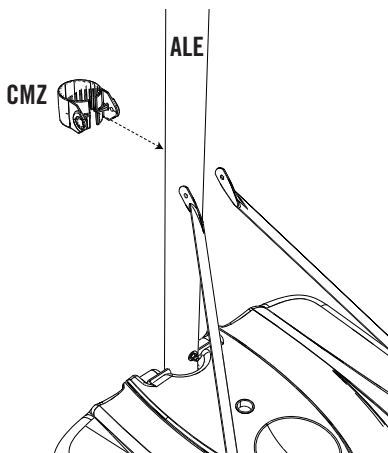



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


NO TOOLS REQUIRED FOR THIS PAGE

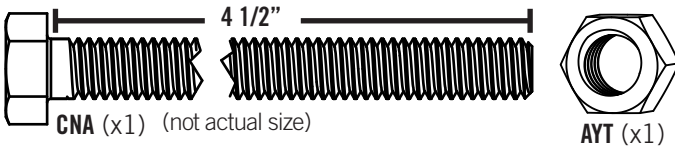

SEC

2.5

Attach the **Pole Braces (ALI)** to the **Bottom Pole (ALE)** by securing the **5/16" Hex Knobs (AYU)** through the **Slide Collar (CMZ)** using the hardware shown.

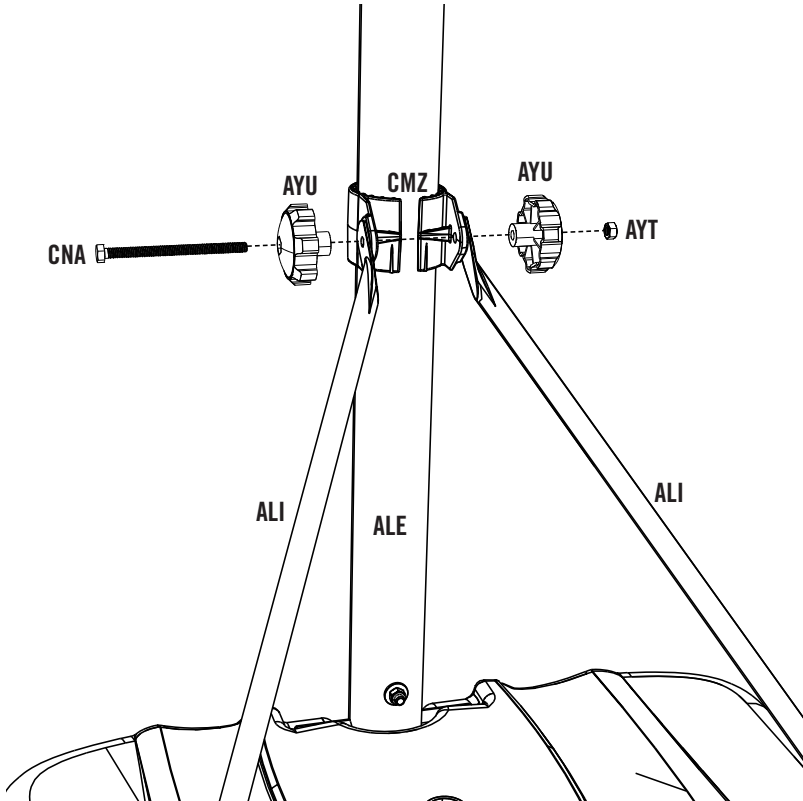


Note: Tip the system forward so the Pole rests on the ground. Do not stand the system up until it is filled with either sand or water later in the assembly.


SEC 3 BACKBOARD TO POLE ASSEMBLY

HARDWARE REQUIRED


Hardware shown at Actual Size




APG (x2)
5/16" x 3 1/4" Hex Bolt




ABD (x4)
5/16" Washer



AAC (x2)
5/16" x 1 3/4" Hex Bolt




APJ (x2)
5/16" x 3/4" Hex Bolt




AAJ (x2)
5/16" Hex T-Nut



ABK (x4)
5/16" Nylock Flange Nut



APN (x2)
5/16" Flange Lock Nut

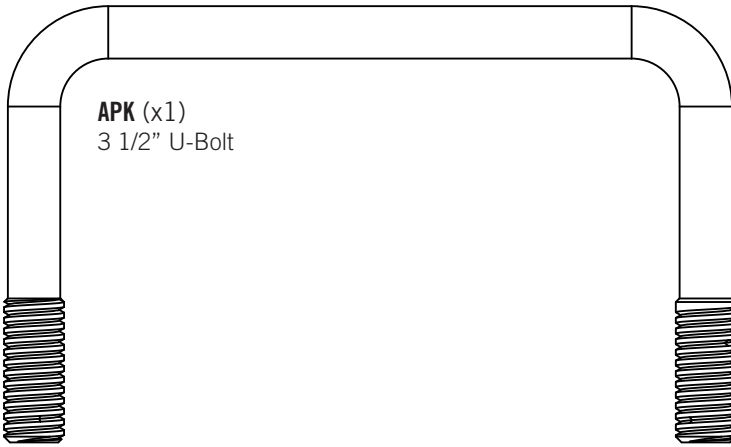


APK (x1)
3 1/2" U-Bolt


SEC 3 BACKBOARD TO POLE ASSEMBLY

PARTS REQUIRED

Parts shown at 10% of Actual Size




AJJ (x1)
Left Backboard Bracket




AJK (x1)
Right Backboard Bracket

ALX (x1)
Rim

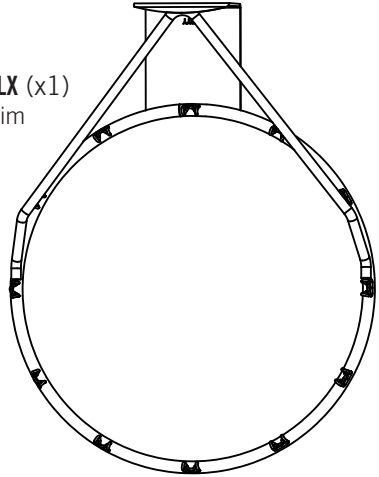


Part shown at 5% of Actual Size

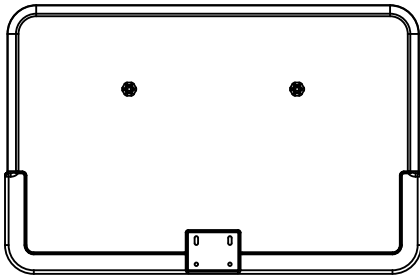

AJI (x1)
Backboard

Part shown at 25% of Actual Size



AOX (x1)
Rim Support Channel

TOOLS REQUIRED




Pliers




1/2" Wrench (x2)




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



1/2" (x2)



APG (x2)



APN (x2)




APK (x1)

(Not actual size)

SEC

3.1


Slide the **3 1/2" U-Bolt (APK)** through the **Left and Right Backboard Brackets (AJJ & AJK)**. The U-Bolt must rest in the notches of the Backboard Brackets as shown.

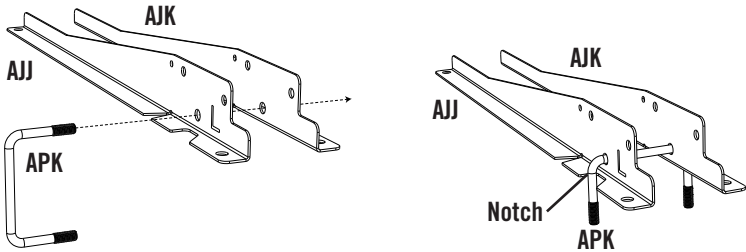

SEC


3.2

Secure the **Left and Right Backboard Brackets (AJJ & AJK)** to the **Top Pole (ALH)** with the hardware shown.

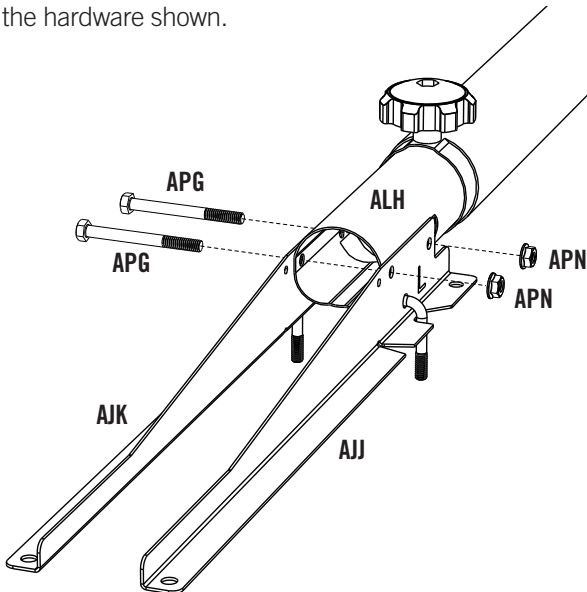





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



1/2" (x2)



AAC (x2)



ABD (x4)




ABK (x4)

SEC

3.3


Attach the **Rim (ALX)** and **Backboard (AJI)** to the Pole assembly by placing the **Rim Support Channel (AOX)** in the recess on the underside of the Backboard with the flat side placed against the Backboard. Insert the **3 1/2" U-Bolt (APK)** through the top holes of the Backboard and the Rim, and secure the U-Bolt with **5/16" Washers (ABD)** and **5/16" Nylock Flange Nuts (ABK)**.

Then insert the **5/16" x 3 1/4" Hex Bolts (AAC)** with **5/16" Washers (ABD)** through the bottom holes of the Rim and Backboard and through the Rim Support Channel and Backboard Brackets, and secure with the **5/16" Nylock Flange Nuts (ABK)**.

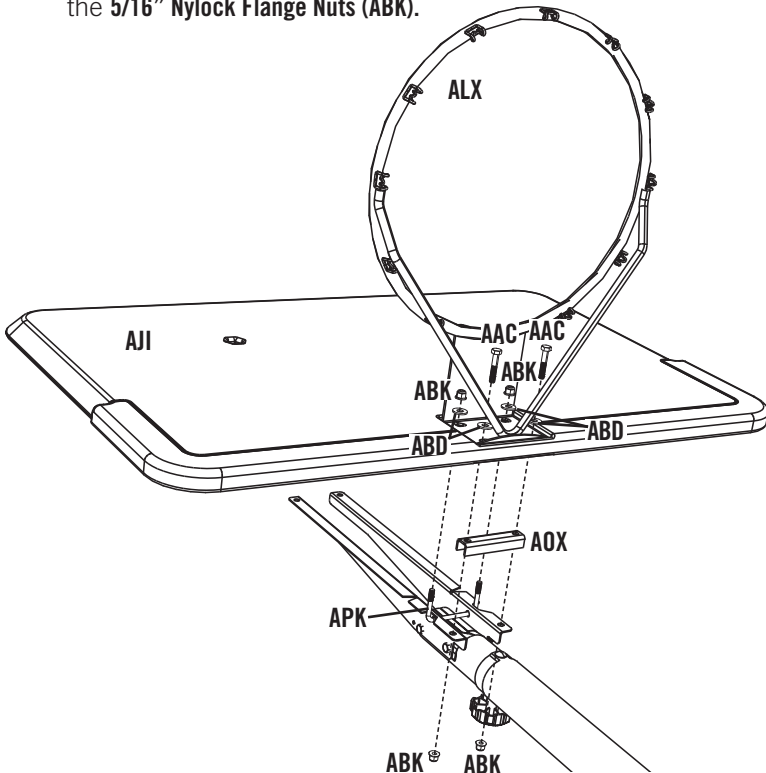





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



1/2"



APJ (x2)




AAJ (x2)

SEC


3.4

Bend the **Left and Right Backboard Brackets (AJJ & AJK)** outward by hand and position the holes in the Backboard Brackets over the holes in the **Backboard (AJI)**. Then securely fasten the Backboard Brackets to the Backboard with the hardware shown.

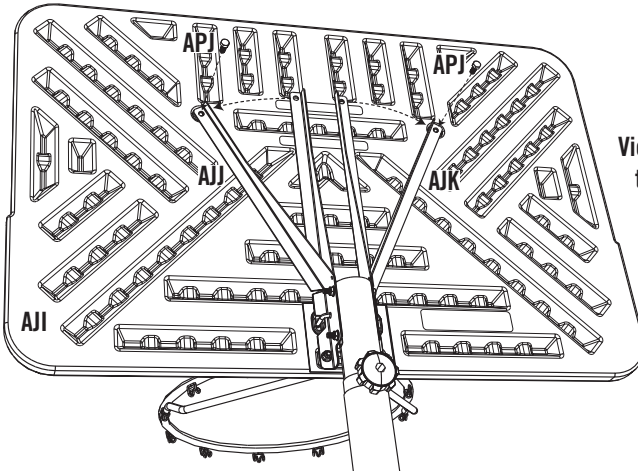

View from Back of the Backboard


View from Front of the Backboard

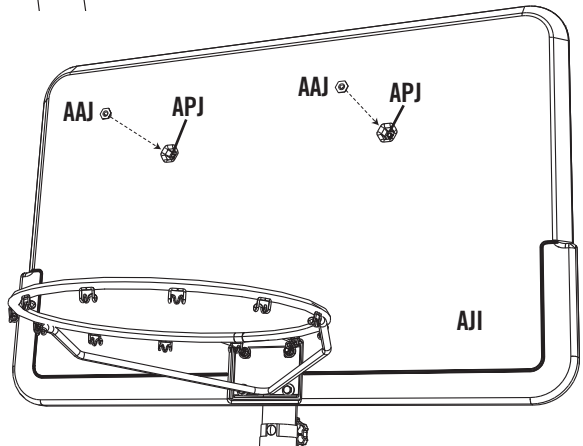


SEC 4 FINAL ASSEMBLY

HARDWARE REQUIRED


Hardware shown at of Actual Size




CNC (x2)
6" Chain (not to scale)




AQQ (x2)
3/8" Concrete Drop-in Anchor



AAF (x2)
3/8" Washer




CHQ (x2)
3/8" x 1" Hex Bolt



ABD (x2)
5/16" Washer (not used)


PARTS REQUIRED

Part shown at 10% of Actual Size

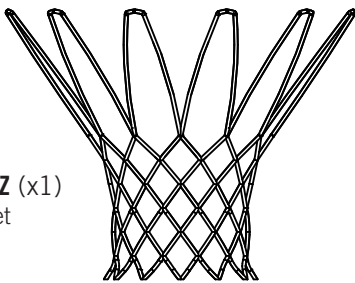

AKZ (x1)
Net

Part shown at Actual Size



AEF (x2)
Base Plug

TOOLS REQUIRED



Funnel



Sand
(319 lb)



Water Hose



1/2" Wrench



Hammer



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



(319 lb)

NO HARDWARE REQUIRED FOR THIS PAGE

Two adults are required to complete assembly. To prevent serious injuries, the Pole should be held down by one adult at all times while the Base is being filled.

SEC

4.1

OPTION A: FILLING WITH SAND


(319 lb of sand required)

- Insert a **Base Plug (AEF)** into the **Base (AJM)** in the hole closest to the Pole.
- Using a funnel, fill the Base with sand through the hole furthest from the Pole until the sand is just below the hole.
- Using two adults, stand the Base up on a flat surface and finish filling the Base with sand.
- Insert the other Base Plug into the hole furthest from the Pole.



WARNING

For safety reasons, we recommend that sand be used instead of water to fill the Base. If a leak develops, water could run out unnoticed, allowing the system to fall over, resulting in serious personal injuries, or property damage. If using Water, check the Base carefully for leaks. If a leak is found, lay the system down on the ground and call Customer Service. Do not use, stand up, or play on a leaking system.

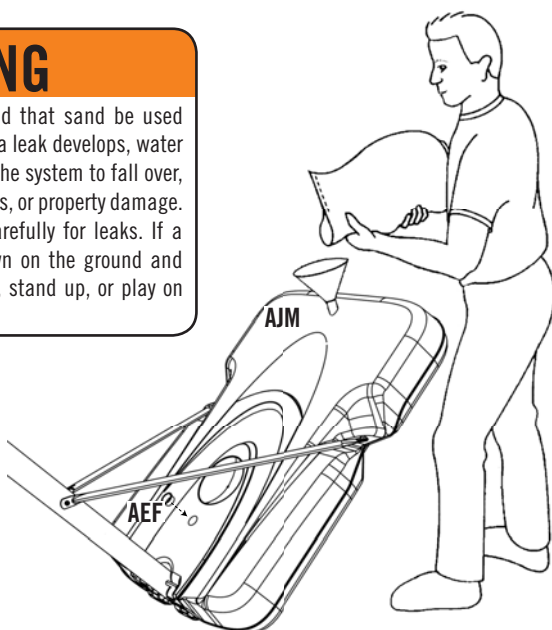



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

Two adults are required to complete assembly. To prevent serious injuries, the Pole should be held down by one adult at all times while the Base is being filled.

SEC

4.1

OPTION B: FILLING WITH WATER

- Insert a **Base Plug (AEF)** into the **Base (AJM)** in the hole closest to the Pole.
- Fill the Base with cold water through the hole furthest from the Pole until the water is just below the hole.
- Using two adults, stand the Base up on a flat surface and finish filling the Base with water.
- Add one tablespoon of chlorine bleach to the water to prevent algae formation.
- Insert the other Base Plug into the hole furthest from the Pole.






TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

NO TOOLS OR HARDWARE REQUIRED FOR THIS PAGE

SEC

4.2

Attach **Net (AKZ)** to the **Rim (ALX)**.

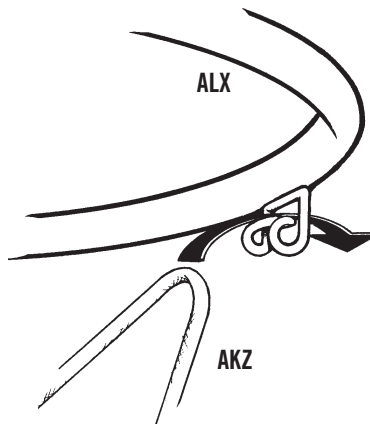


Note: If a replacement Net is needed, please call our Customer Service Department. Our Nets are shorter than average to reduce the risk of entanglement.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



1/2" (x2)




CNC (x2)

(not to scale)

SEC


4.3

Remove the 5/16" Nylock Nut (AAO) and the 5/16" Washer (ABD) from the left Pole Brace assembly. Slide the 6" Chain (CNC) onto the 5/16" x 1 1/4 Hex Bolt (BKH) and reattach the hardware as illustrated. Repeat this step for the right Pole Brace assembly. Tighten the hardware.

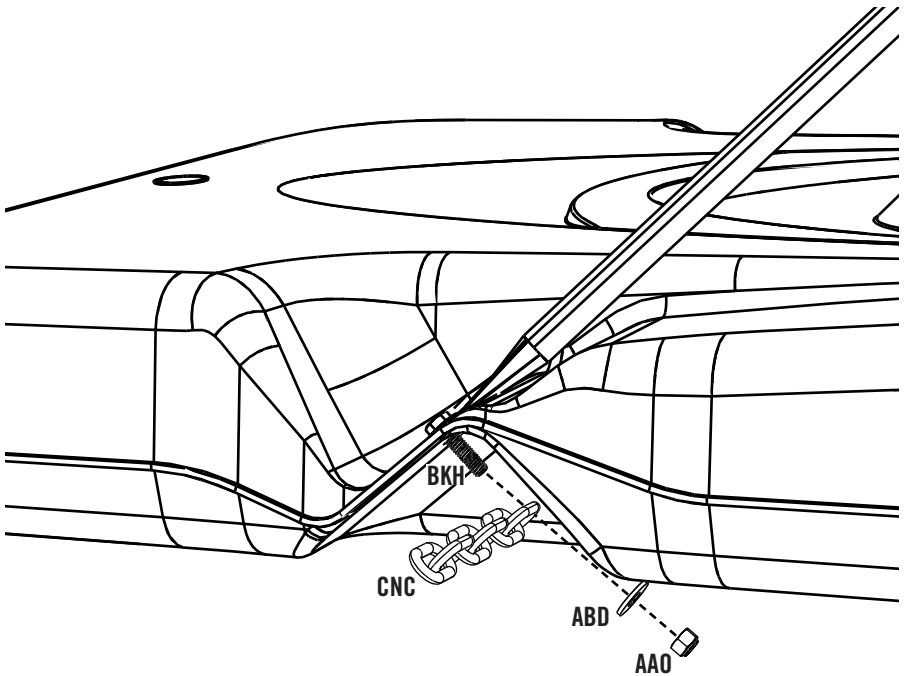





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AAQ (x2)



CHQ (x2)




AAF (x2)

SEC

4.4

Pull out the end links of the **Chains (CNC)** so they are away from the sides of the Base. Mark the location of the last links in the Chain and drill a hole 13 mm (1/2 inch) in diameter and 39 mm (1 1/2 inches) deep in the cement in each spot. Place the **Cement Anchors (AAQ)** in the drilled holes and use a 5/16" hex bolt and a hammer to tap down the anchor tab located inside each Anchor. Tap with force at least five or six times until the sides of the Anchor begin to flare. Slide a **3/8" x 1" Hex Bolt (CHQ)** through a **3/8" Washer (AAF)** and through the end link of the Chain. Secure the Bolts into the Cement Anchors. **Repeat for the other side.**

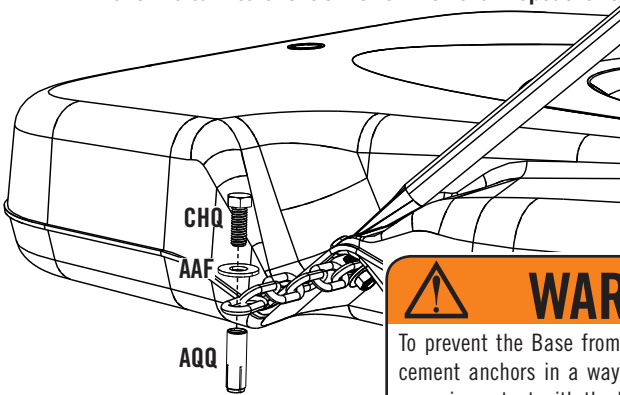

WARNING

To prevent the Base from being punctured, install the cement anchors in a way that will not permit them to come in contact with the Base. The hardware used with the cement anchor could puncture the Base, resulting in leakage, which could cause the system to tip over, potentially resulting in serious personal injuries. Do not attempt to use the portable unit without first filling the Base with weight and securing the cement anchors. The system may fall over without being secured to the ground and could cause serious personal injuries.



Note: Using the Cement Anchors cannot replace filling the Base with sand or water. The Base must be filled and secured with the Cement Anchors. Both are necessary for a secure and stable system.

NOTES


NOTES

**ENHANCE YOUR LIFETIME® PURCHASE BY ADDING
ACCESSORIES OR OTHER GREAT PRODUCTS:**

To purchase accessories or other Lifetime Products, visit us at:

www.lifetime.com

Or call: 1-800-424-3865





WARNING




FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

OWNERS MUST ENSURE THAT ALL PLAYERS KNOW AND FOLLOW THESE RULES FOR SAFE OPERATION OF THE SYSTEM.

1. **Do Not allow children to move or adjust the system.**
2. Always make sure adjustment knob is securely tightened **before** play.
3. Make sure cement anchors are installed properly during assembly and that they are secure before play.
4. During play, especially when performing dunk type activities, keep players face away from the backboard, rim and net. Serious injury could occur if teeth/face come in contact with the backboard, rim or net. Player should wear mouth guard during play.
5. Only hang from rim briefly to regain balance or avoid injuring others. Release the rim as soon as safely possible.
6. **DO NOT** slide, climb or play on base or pole.
7. **Before each use**, always check that the base is filled according to manufacturer's instructions. Check for loose hardware, instability, and signs of corrosion and repair before each use. Check the base for leaks. If a leak exists, water could run out unnoticed, allowing the unit to fall over. Never play on damaged equipment.
8. Surface beneath the base must be smooth and free of gravel or other objects. Punctures can cause leakage and could cause system to tip over.
9. During play, do not wear Jewelry (rings, watches, necklaces, etc.). Objects may entangle in net.
10. **When moving system, keep hands and fingers away from moving parts.**
11. **Once a month check pole and all metal parts for rust. Completely remove rust and repaint with exterior enamel. If rust has penetrated any steel part, replace that part before using system again. Keep water and organic material away from pole.**
12. Never operate or leave the unit standing in an upright position without first filling the base with weight and securing cement anchors or it may tip over into the pool and cause injuries such as those listed above.
13. **Do not use system during windy or severe weather. System may tip over. Place system in an area protected from the wind or in an area away from property that may be damaged if the system falls.**

TRANSPORTING THE PORTABLE BASE

1. Make sure the base is empty before moving.
2. Face the front of the base where the wheels are located and pull back on the pole until the unit is balanced on its wheels.
3. Move the unit to the desired location and carefully set it down.
4. Fill the Base, secure cement anchors and check portable base for stability before play.



ADJUSTING THE SYSTEM

1. One person must stabilize the backboard, while the other person removes the pole locking knob and bolt.
2. Adjust the pole to desired height, and replace the knob and bolt.
3. Make sure adjustment knob is secure.



www.lifetime.com

Part #600248E

WARRANTY INFORMATION

LIFETIME BASKETBALL EQUIPMENT

5-YEAR LIMITED FACTORY WARRANTY

THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.

1. Lifetime basketball systems are warranted to the original purchaser to be free from defects in material or workmanship for a period of five years from the date of original retail purchase. The word "defects" is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, "acts of nature" or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective basketball equipment. If the equipment is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the basketball system or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the net or rim will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to the extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

ALL WARRANTY CLAIMS MUST BE ACCOMPANIED BY A SALES RECEIPT.

REPORT PRODUCT DEFECTS IN WRITING TO:

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010, or call (800) 225-3865

M-F 7 a.m. to 5 p.m. MST.

****Call or visit our Web site for Saturday hours****

Please include your dated sales receipt and photographs of damaged parts.

To register the product, visit our Web site at www.lifetime.com



www.lifetime.com