



# eLucent WPFC WALL PACK

- **DLC-Listed**
- **Luminous Efficacy of 118 lm/W or Higher**
- **IP65 rated**

The ATG eLucent WPFC presents top-of-class optical performance in a robust, space-efficient housing. The luminaire is tuned for high visual quality at night and is ideal for illumination of stairways, tunnels, building perimeters, overpasses, and parking garages. eLucent WPFC fixtures are rated for use in wet locations and can operate in ambient temperatures from -40° to 40°C.

## OPTICS

The eLucent WPFC Wall Packs offer superior optical performance in their segment. CRI is 80+ across standard offerings of CCT 4000K and 5000K, and the clear glass lens is carefully fitted for consistency and accurate transmittance of light output. Distribution is tuned for safety and visual comfort. 3000K and 3500K models are available for direct factory order.

## ELECTRICAL

Input voltage is a standard 120-277V, with optional 347-480V drivers. Fixture lifespan is rated for 69,000 hours. Luminous efficacy is 118 Lm/W or greater with fixture lifespan rated for 81,000 hours. 40W, 60W, and 90W models are standard, with a 28W available for direct factory order.


## CONSTRUCTION

eLucent WPFC housing is manufactured within precise tolerances from heavy-wall, die-cast aluminum. Integrated heat management promotes operating efficiency as well as longevity of components. The eLucent WPFC is tested for use in wet locations.


## MOUNTING

Convenient, modular design means the eLucent wall pack may be mounted to nearly any vertical surface. Recommended mounting height is between 8' and 20'.

## STANDARD FEATURES

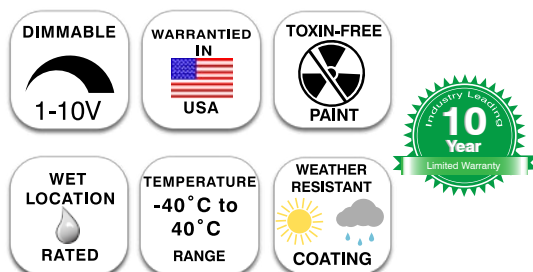

## OPTIONS

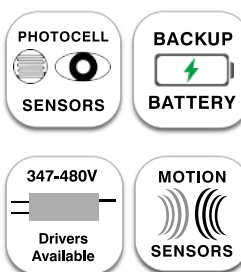

## FINISH





Sample Order: WPFC-40-50-G2							
SERIES	WATTAGE	CCT	VOLTAGE	DIMMING	FINISH COLOR	GENERATION	OPTIONS
WPFC=Full Cutoff Wall Pack	-40=40W -60=60W -90=90W	40=4000K 45=4500K 50=5000K	Blank=100-277 V V=347-480 V	Blank=1-10V Dimming ND=Non-Dimming	Blank=Standard	Blank=Current Generation -G2=Generation 2	LOD=Bi-Level Sensor MPC=On/Off Sensor EKS=Photocell Sensor EM=Emergency Backup Battery

Performance Data										
PART NO.	WATTS(W)	INPUT VOLTAGE(VAC)	EFFICACY(Lm/W)	LUMENS(Lm)	CRI	CCT (K)	PF	THD	L70 (Hours)	DIMENSIONS (L*W*H) (Inches)
WPFC-28	28.0	120-277	125	3500	80+	4000 5000	0.9	<15%	63,000	14.25*11.54*9.06
WPFC-40-40	40.5	120-277	120	4800	80+	4000 5000	>0.9	<10%	81,000	14.25*11.54*9.06
WPFC-60-40	60.4	120-277	120	7200	80+	4000	>0.9	<12%	81,000	18.31*13.78*9.13
WPFC-60-50	61.0	120-277	125	7500	80+	5000	>0.9	<12%	81,000	18.31*13.78*9.13
WPFC-90	92.8	120-277	125	11250	80+	4000 5000	>0.9	<20%	81,000	18.31*13.78*9.13
COLOR	HOUSING	LENS TYPE	CERTIFICATION	WARRANTY	*Not all versions of this product may be DLC-qualified. Please inquire with our sales team.					
Bronze	Die Cast Aluminum	Clear Glass	DLC, ETL	10 Years						

