

Features

- Advanced spray engine provides three spray options: powerful massage, intense drenching, or wide coverage.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Powerful massage is a focused stream for massaging sore muscles or for use as a utility spray.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Single-lever handle allows for simultaneous on/off activation and temperature control.
- Premium KOHLER finishes with ScratchShield® technology withstands even the toughest daily use.
- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit for anti-scalding protection and precise temperature control.
- Package includes: showerhead, showerarm and flange, valve trim plate, diverter spout with 1/2" NPT or slip-fit connection and Rite-Temp® valve with 1/2" connections.

Material

- Constructed with premium materials for durability and reliability.

Water Conservation & Rebates

- WaterSense-labeled 1.8 gpm showerheads use at least 25 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines.

Adapters, Rough-in and Extension Kits

K-10350-NA



Codes/Standards




ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

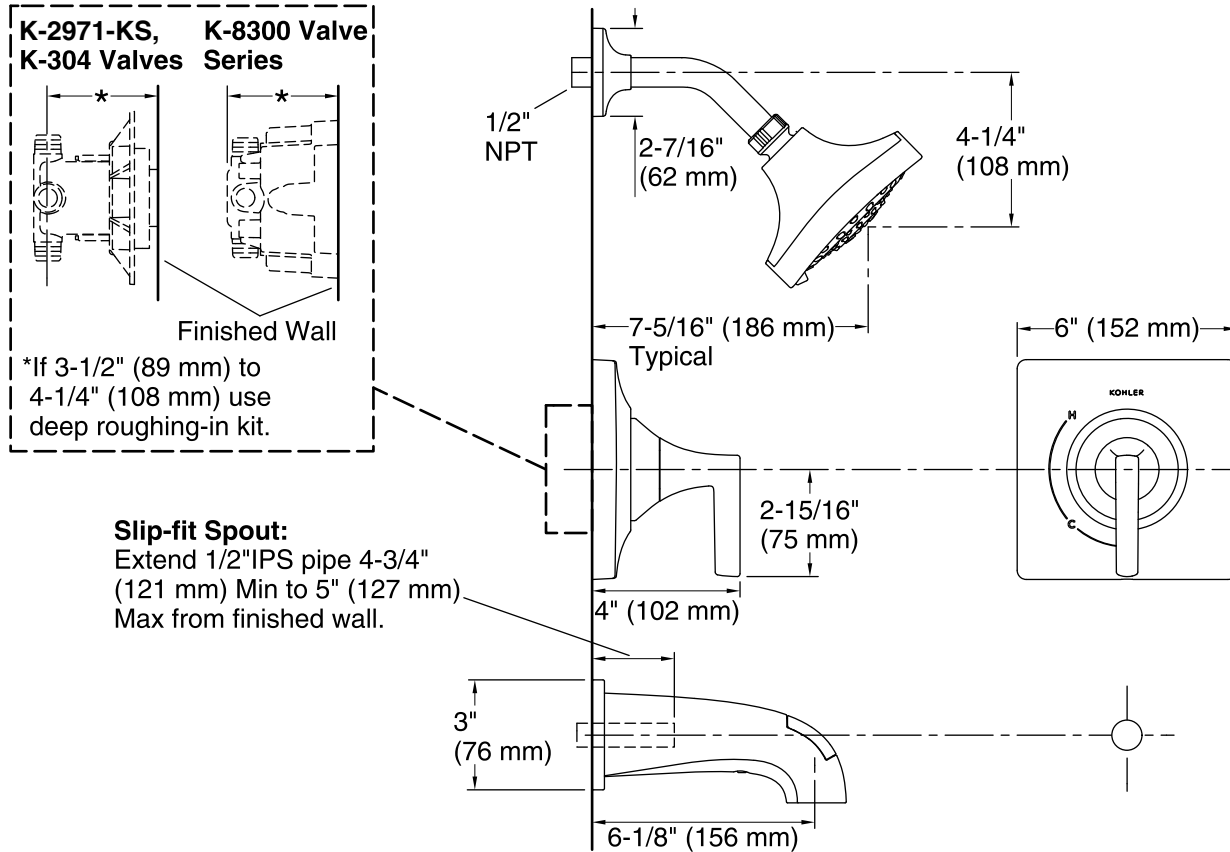

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow rate - Max: 5 gal/min (18.9 l/min)
Pressure - Max: 45 psi (3.1 bar)
Min. pressure IN: 20 psi (1.4 bar)

Showerhead/Body Spray:

Rated maximum flow: 1.8 gal/min (6.8 l/min)
Pressure: 80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.08 gal/min (4.1 l/min) or less.

Install this product according to the installation instructions.