

Mesh Back Shell Tiles

Applications

Recommended for kitchen backsplashes, accent walls, showers or tub surrounds, and pools or spas.



Installation



1. Make sure that the quantity of mosaics are sufficient



2. Measure the coverage area and cut to fit them



3. Thinset, notch trowel, sponge clamp, and melamine



4. Mix the thinset



5. Apply the thinset evenly over the wall



6. Press the tiles to the wall carefully



7. Fill the joint with sponge clamp



8. Clean the surface with melamine

*** For seamless splicing shell mosaic tile, please skip step 7.**

Cutting

A wet saw is recommended to cut mosaics tiles.

Sealing

Mosaics containing natural stone should be sealed prior to grouting. Use a premium penetrating sealer for a natural look. To darken and highlight the natural elements of the stone, use a stone enhancing sealer. Never allow sealers to dry on shell tiles


Care and Cleaning

Use a soft cloth or sponge with warm water or any non-abrasive mild detergent.

Self-adhesive backing Shell Tiles


Applications

Recommended for kitchen backsplashes, accent walls, feature walls, any flat smooth dry walls

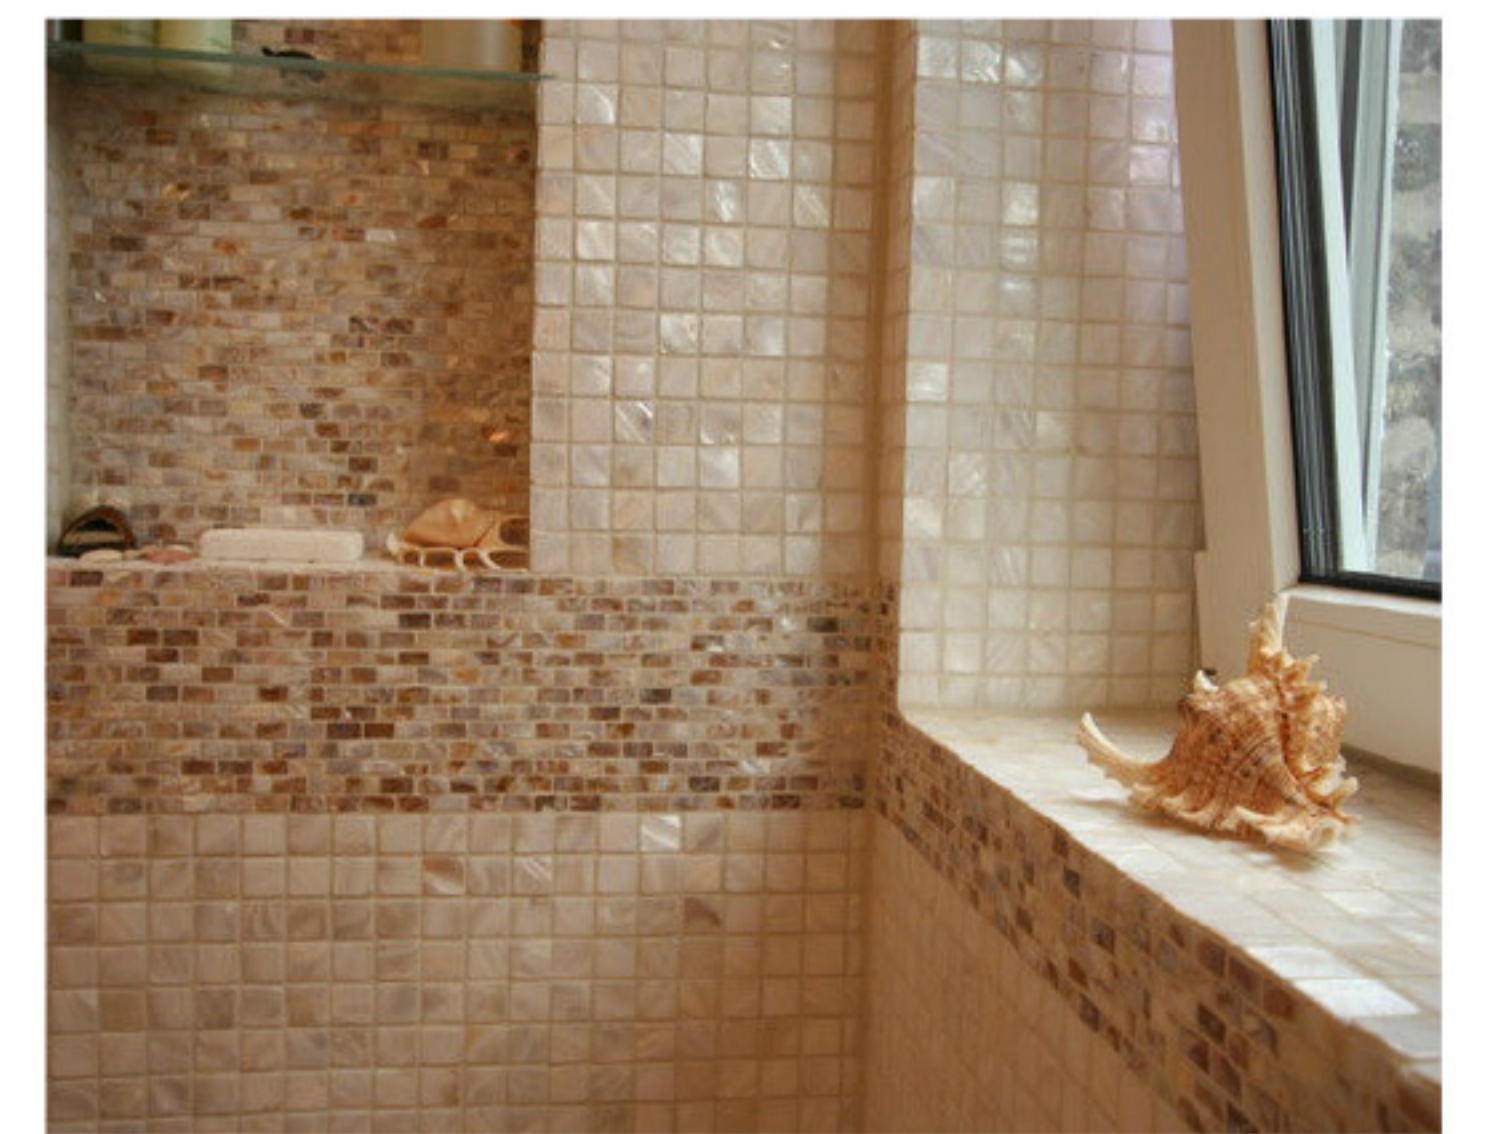

Warning:

- 1, Rough surfaces such as porous wood, embossed ceramic tiles or textured wallpaper are not suitable to install.
- 2, Tiles should not directly contact with flames, steam or submerge in water. Do not install tiles less than 16 inches away from the top of stove. The self-adhesive backing is not suitable for showers bathroom application

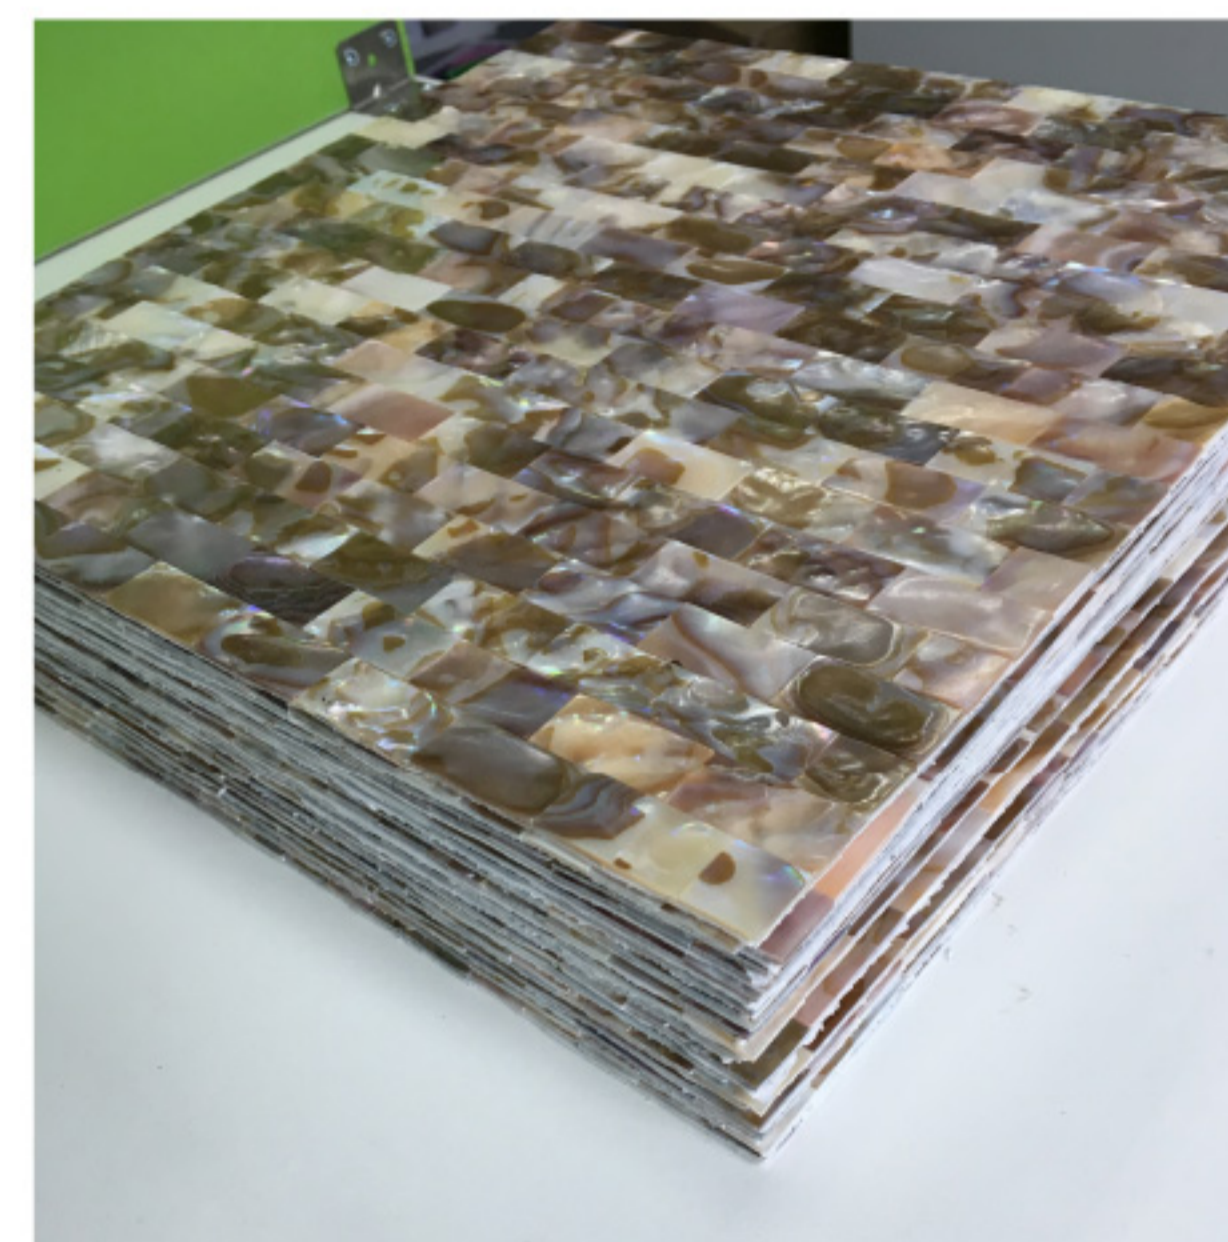

1. Make sure that the quantity of mosaics are sufficient




2. Measure the coverage area and cut to fit them




3. Ensure the wall surface is clean, flat and dry prior to installation, may require sanding of surface by sandpaper for better grip



4. Pre-mark wall according to the product dimension to ensure straight and level installation

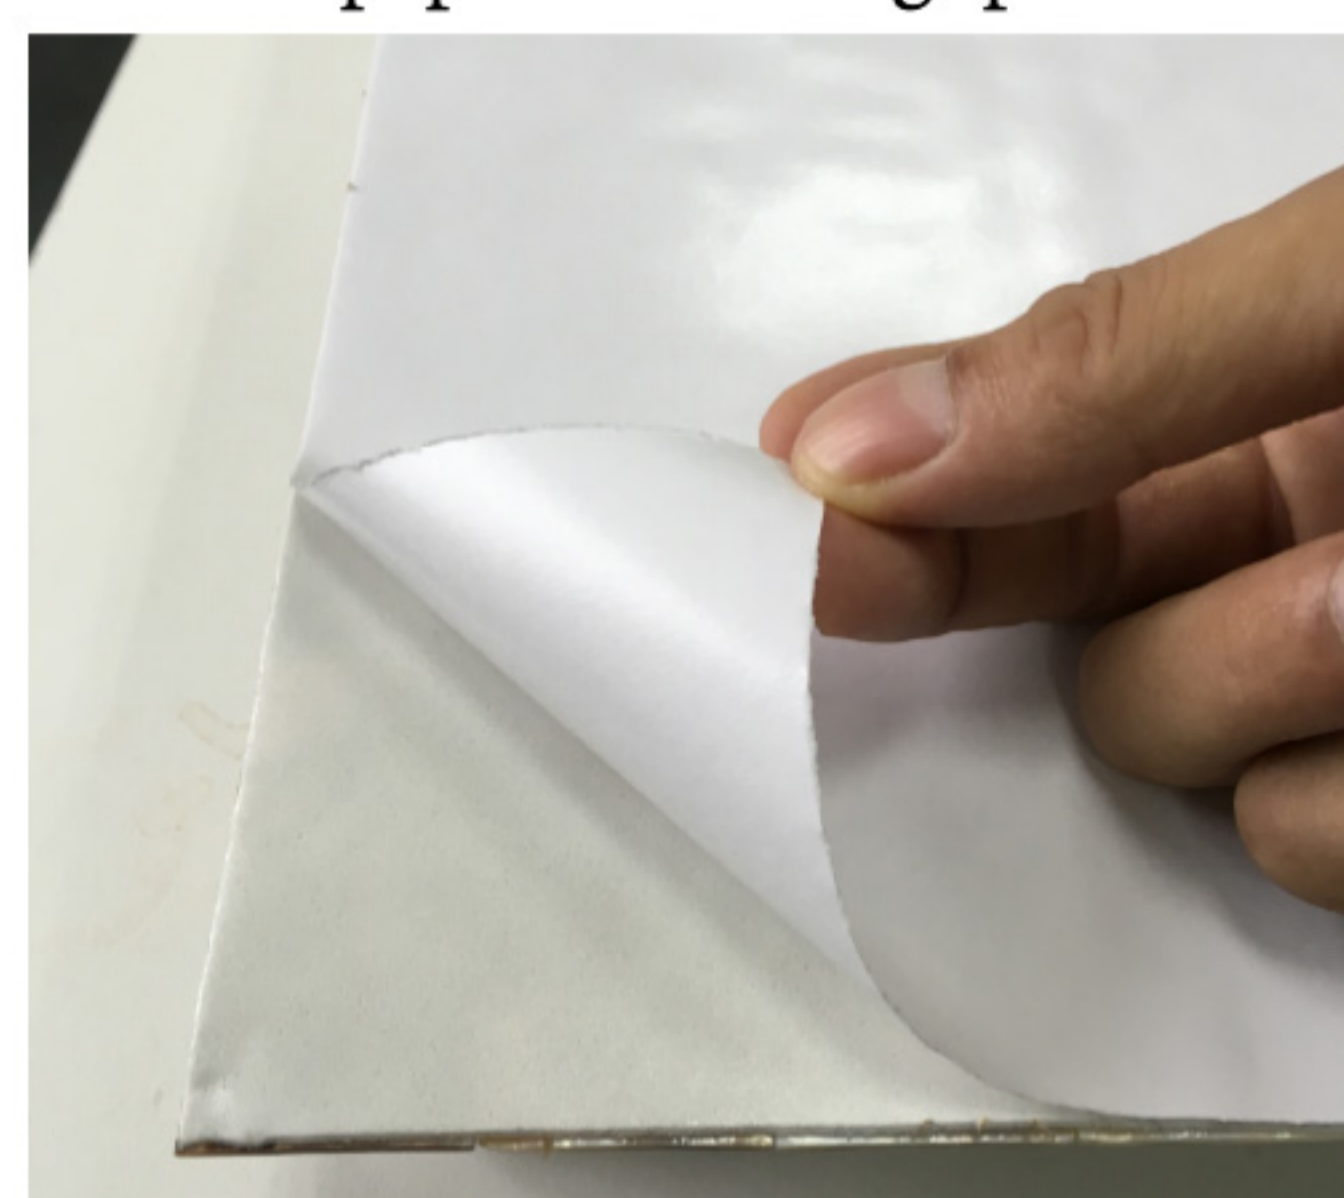

5. Peel off the adhesive protective film

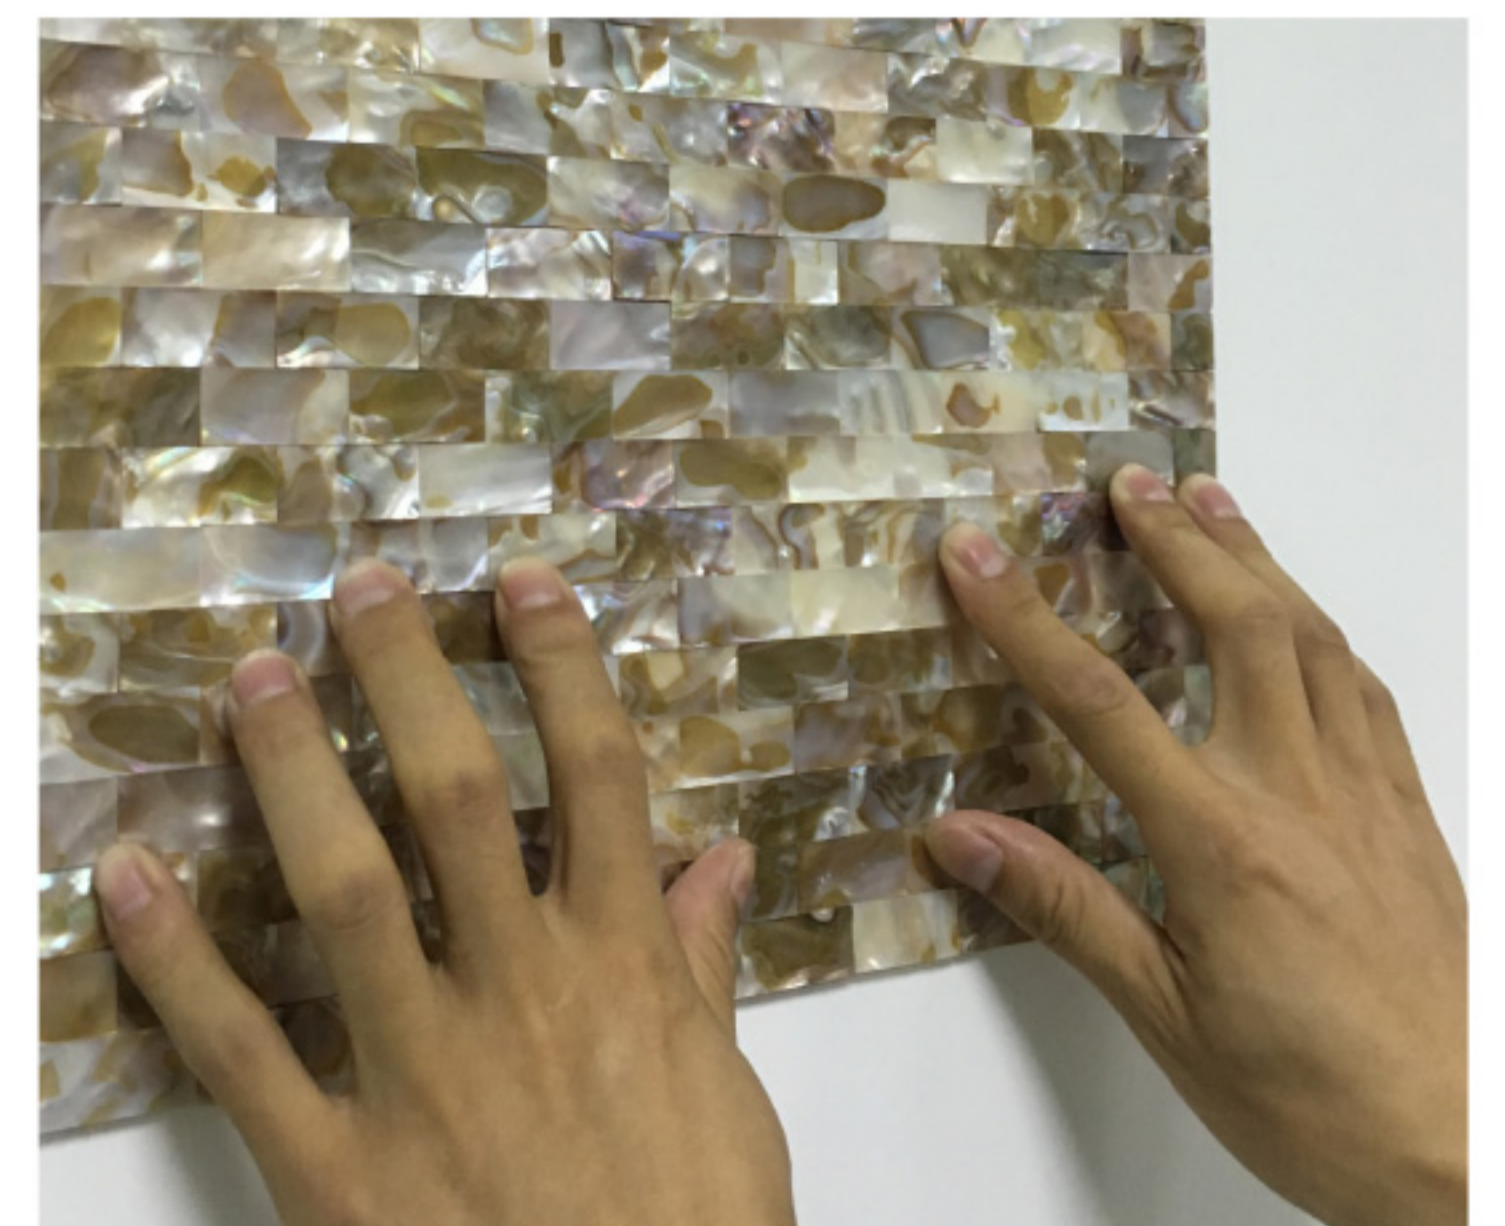

6. Follow the pre-marked lines, place the tiles to the wall, press it hard to ensure they stick firmly



7. Use the wet soft cloth clean the tiles after installation



8. The nice work finished