

ASSEMBLY AND INSTALLATION (Continued)

WALL FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Screw the #8-32 FIXTURE MOUNTING SCREWS (2) onto the MOUNTING BRACKET (3), and thread the #8-32 HEX NUTS (5) onto the #8-32 FIXTURE MOUNTING SCREWS (2), Do not tighten the #8-32 HEX NUT (5) at this time.
2. Pull the power supply wires out from the OUTLET BOX (1), and mount the MOUNTING BRACKET (3) to the OUTLET BOX (1), using MOUNTING SCREWS (4).
3. Place the BACK PLATE (13) of the fixture over the OUTLET BOX (1) and onto the FIXTURE MOUNTING SCREWS (2), and adjust the HEX NUTS (5) until it protrudes 1/4" out from the BACK PLATE (13). Remove the BACK PLATE (13) and secure the position of the SCREWS (2) by tightening the HEX NUT (5) against the MOUNTING BRACKET (3).
4. Attach the BLACK SUPPLY WIRE (9) to the BLACK FIXTURE WIRE (10) by using the WIRE NUT (8). In the same manner, attach the SUPPLY WHITE WIRE (11) to the WHITE FIXTURE WIRE (12). Connect the FIXTURE GROUND WIRE (7) to the POWER SUPPLY GROUND WIRE (6) using a WIRE NUT (8)(not included).
5. Place the BACK PLATE (13) back onto the FIXTURE SCREWS (2), and secure into place using the DECORATIVE NUTS (14) provided.

6. Loosen the GLASS HOLDER SCREW (15) on the GLASS HOLDER (16). Then insert the GLASS SHADE (17) all the way into the GLASS HOLDER (16) and finger tighten the GLASS HOLDER SCREWS (15) to hold the GLASS SHADE (17).
7. Screw a light bulb into the socket and make sure it does not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

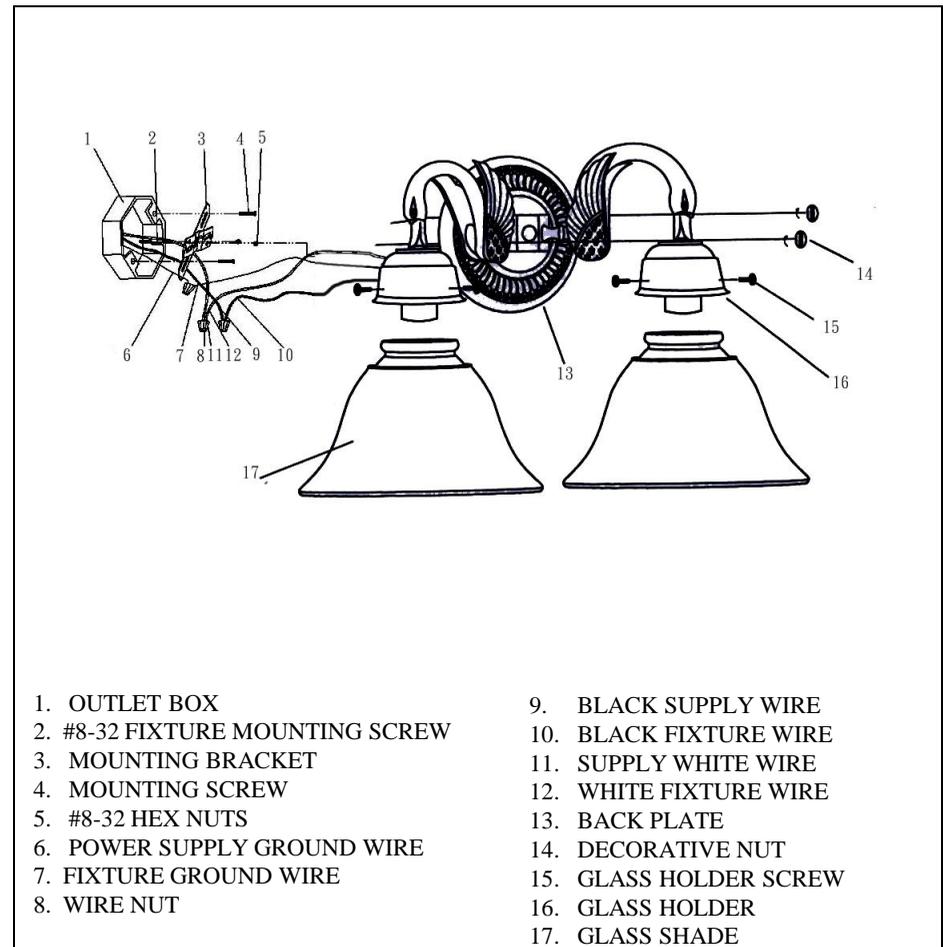

- | | |
|---------------------------------|------------------------|
| 1. OUTLET BOX | 9. BLACK SUPPLY WIRE |
| 2. #8-32 FIXTURE MOUNTING SCREW | 10. BLACK FIXTURE WIRE |
| 3. MOUNTING BRACKET | 11. SUPPLY WHITE WIRE |
| 4. MOUNTING SCREW | 12. WHITE FIXTURE WIRE |
| 5. #8-32 HEX NUTS | 13. BACK PLATE |
| 6. POWER SUPPLY GROUND WIRE | 14. DECORATIVE NUT |
| 7. FIXTURE GROUND WIRE | 15. GLASS HOLDER SCREW |
| 8. WIRE NUT | 16. GLASS HOLDER |
| | 17. GLASS SHADE |