

CORALAIS_®

Features


- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- · Lever or loop handle
- Handspray
- 22" (55.9 cm) long stainless steel flexible hose connections
- Available with 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

KITCHEN SINK FAUCET K-15176



Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description			ADA			ADA
K-15176-F	Kitchen sink faucet with 8-1/2" (21.6 cm) swing spout	□ CP					
K-15176-FT	Kitchen sink faucet with 10" (25.4 cm) swing spout	□ CP	□ PB	☐ Other			
K-15176-FL	Kitchen sink faucet with 10" (25.4 cm) swing spout				□ CP	□ PB	☐ Other

Optional Accessories on Page 2.

Product Specification


Single-control kitchen sink faucet shall be of metal construction. Faucet shall include a one-piece, self-contained ceramic disc valve, which allows volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Valve shall include a high-temperature limit stop. Faucet shall include 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout, lever or loop handle, handspray, and 22" (55.9 cm) long stainless steel flexible hose connections. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-15176-________.

CORALAIS®

Optional Accessories				
K-15179-A	12" (30.5 cm) swing spout and aerator	CP	□ PB	☐ Other

Installation Notes

Install this product according to the installation guide.

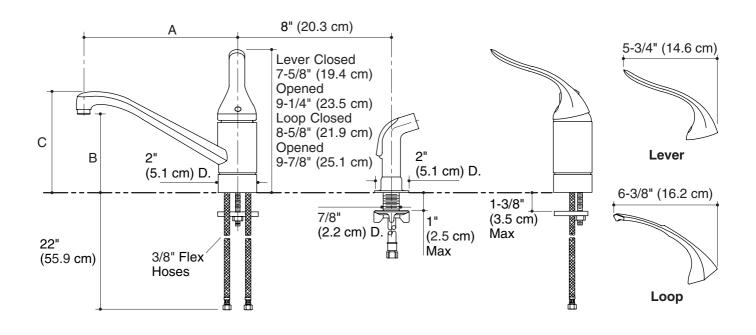

Product Diagram

Α

8-1/2" (21.6 cm)

10" (25.4 cm)



С

6-1/4" (15.9 cm)

7-1/4" (18.4 cm)

В

6-1/4" (15.9 cm)

5-1/8" (13 cm)

K-15176-F

K-15176-FT, K-15176-FL