



AccessPRO™

Innovative Design Saves Time and Money
Relocating Toilet to Meet Accessibility Standards

*American
Standard*

- Two-piece, High Efficiency Toilet (HET), ultra-low consumption (4.8 Lpf/ 1.28 gpf), and meets EPA WaterSense® criteria



- Allows up to 3-1/2" (89 mm) of lateral adjustment of toilet to the right (or left when used with left hand bowl)—no floor flange outlet change required!

- Helps conform to needs of Americans with Disabilities Act (ADA), Fair Housing Act (FHA), and Multifamily Housing Resource Program (MHRP)



- Includes floor template, adjustable trapway kit, and slow-close seat for easy installation


- 3" flush valve, 2-1/8" trapway, 12" rough-in, and 16-1/2" Right Height® elongated rim height for accessible applications



Original toilet location is either too close or too far away from the secondary wall



AccessPRO saves both time and money relocating toilet toward or away from the secondary wall (no floor flange outlet change required)

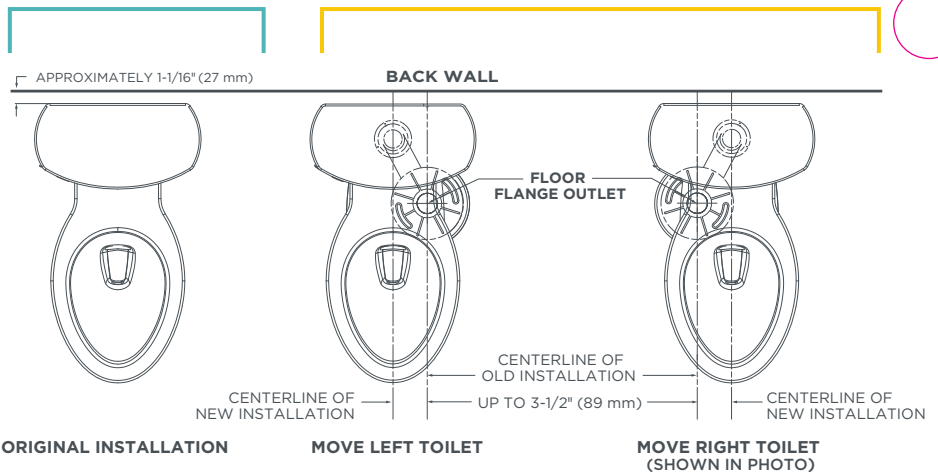

ACCESSPRO DESCRIPTION	COMBINATION	BOWL WITH SEAT	TANK
MOVE LEFT TOILET WITH LEFT HAND LEVER TANK	215AG.107LS	3517AG.100LS	4188A.107
MOVE LEFT TOILET WITH RIGHT HAND LEVER TANK	215AG.108LS	3517AG.100LS	4188A.108
MOVE RIGHT TOILET WITH LEFT HAND LEVER TANK	215AG.107RS	3517AG.100RS	4188A.107
MOVE RIGHT TOILET WITH RIGHT HAND LEVER TANK	215AG.108RS	3517AG.100RS	4188A.108

CHINWARE COLORS
(021 AND 222 SPECIAL ORDER ONLY)

020 WHITE	021 BONE	222 LINEN



For more information on the new AccessPRO, please visit our website at www.americanstandard-us.com/accesspro, scan the QR code, or call 1-800-442-1902.