For Residential and Commercial Applications				
Job Name		Engineer / Architect		
Job Location		Wholesaler		
Submittal Date		Contractor		

# V8-\*\*A Speedi Plumb® Vinyl Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only

### **Design Features:**

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- Greater strength and durability with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- Longer wing nuts ease installation for speedier connections
- Nitrile rubber washers provide a large pliable sealing surface and ensures a long lasting water tight connection
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- 100% Compliant to California and Vermont "low-lead" requirements



#### **Operating Specifications:**

**Temperature:** 40°-140° F, intermittent to 180° F

*Pressure:* 125 psi maximum

**Tubing Diameter:** 0.300" I.D. (0.500" O.D.)

MATERIAL SPECIFICATIONS			
Hose	PVC with polyester braid reinforcement		
Barb	Compliant brass		
Ferrule	Zinc plated 1008 steel		
Nut	Polypropylene or C36000 brass, chrome plated*		
Washer	Nitrile rubber		
F.I.P. Nut	C36000 bras, chrome plated		

<sup>\*</sup> Where Specified





V8-12A F 1/2" F.I.P. x 1/2" F.I.P. x 12" length

V8-12AM F 1/2" F.I.P. x 1/2" F.I.P. metal nut x 12" length

] V8-16A F 1/2" F.I.P. x 1/2" F.I.P. x 16" length

V8-16AM F 1/2" F.I.P. x 1/2" F.I.P. metal nut x 16" length

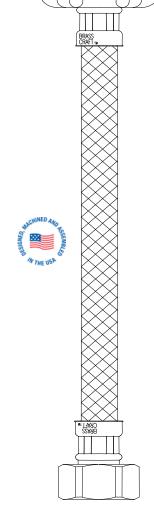






## Speedi Plumb® Vinyl Faucet Connectors -**Female Iron Pipe Inlet**

### Part Listing (con't):

V8-20AM F 1/2" F.I.P. x 1/2" F.I.P. metal nut x 20" length	
∇8-36A F	
	BBOASTAN COMPANY

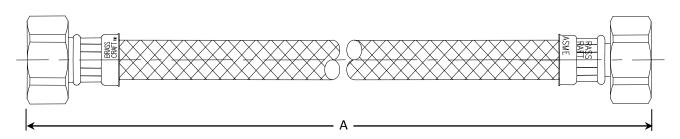

PART DIMENSIONS (Inches)			
Model	DIM. A		
V8-12A	12.00 / 13.00		
V8-12AM	12.00 / 13.00		
V8-16A	16.00 / 17.00		
V8-16AM	16.00 / 17.00		

PART DIMENSIONS (Inches)			
Model	DIM. A		
V8-20A	20.00 / 21.00		
V8-20AM	20.00 / 21.00		
V8-36A	36.00 / 37.00		
V8-36AM	36.00 / 37.00		

### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)







