

Features

- Brass construction
- Dual control wall-mounted
- Cross or lever handles
- Stationary spout
- Less drain
- 6-1/4" (159 mm), 8-1/4" (210 mm), or 10-1/4" (260 mm) 35° spout from wall to center of drain
- 1.5 gallons (5.7 liters) per minute maximum flow rate


**WALL-MOUNT BATHROOM SINK
FAUCET TRIM
K-T14413
ALSO K-T14415, K-T14417**



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- All applicable US Federal and State material regulations
- EPA WaterSense®

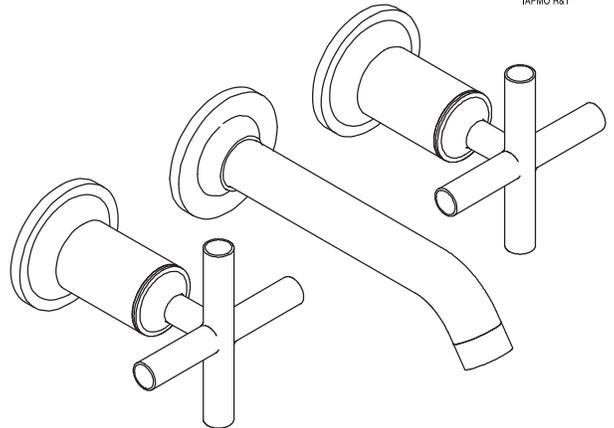

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Cross		Lever	
		 ADA	<input type="checkbox"/> CP <input type="checkbox"/> Other __	 ADA	<input type="checkbox"/> CP <input type="checkbox"/> Other __
K-T14413-3	Wall-mount bathroom sink faucet trim – 6-1/4" (159 mm)	<input type="checkbox"/> CP	<input type="checkbox"/> Other __		
K-T14413-4	Wall-mount bathroom sink faucet trim – 6-1/4" (159 mm)			<input type="checkbox"/> CP	<input type="checkbox"/> Other __
K-T14415-3	Wall-mount bathroom sink faucet trim – 8-1/4" (210 mm)	<input type="checkbox"/> CP	<input type="checkbox"/> Other __		
K-T14415-4	Wall-mount bathroom sink faucet trim – 8-1/4" (210 mm)			<input type="checkbox"/> CP	<input type="checkbox"/> Other __
K-T14417-3	Wall-mount bathroom sink faucet trim – 10-1/4" (260 mm)	<input type="checkbox"/> CP	<input type="checkbox"/> Other __		
K-T14417-4	Wall-mount bathroom sink faucet trim – 10-1/4" (260 mm)			<input type="checkbox"/> CP	<input type="checkbox"/> Other __

Product Specification

The wall-mount bathroom sink faucet trim shall be of brass construction. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall be dual control wall-mounted. Product shall be available with a 6-1/4" (159 mm), 8-1/4" (210 mm), or 10-1/4" (260 mm) 35° spout from the wall to center of the drain. Product shall be available with cross or lever handles. Product shall feature a stationary spout. Product shall be less drain. Faucet shall be Kohler Model K-T_____ - _____ - _____ with required K-410-K-NA valve.

PURIST®


Required Accessories			
K-410-K	Wall-mount valve		<input type="checkbox"/> NA
Optional Accessories			
K-7114	Pop-up bathroom sink drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7124	Touch-activated bathroom sink drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7127	Bathroom sink drain with non-removable metal stopper	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7129	Bathroom sink grid drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
_____	Additional flow options are available (refer to the Kohler Price Book)	<input type="checkbox"/> NA	

Installation Notes

Install this product according to the installation guide.

The distance between the bottom of spout and top of the fixture rim must not be less than 1-1/2" (38 mm) and not greater than 6" (152 mm).

Three 1-1/2" (38 mm) diameter cutout holes required for spout and handles.

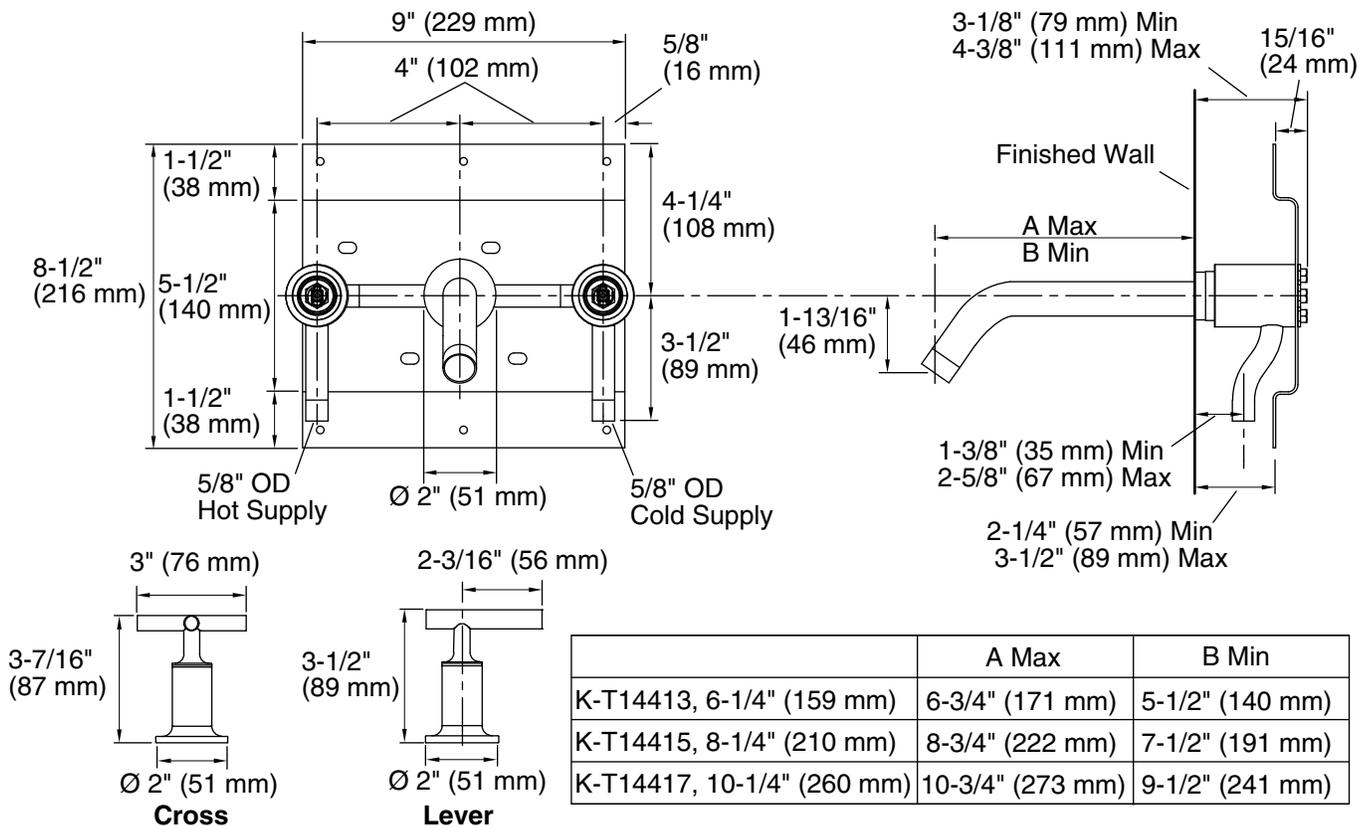

Product Diagram