



**NOW
Available
In 40
Colors**

**Choose the
No Call Back Grout.**



**Color Consistent
Grout**


- Won't mottle or shade regardless of tile type, temperature or humidity
- No efflorescence
- Fast-setting



CUSTOM®

TILE INSTALLATION SYSTEMS

Available in 40 colors.

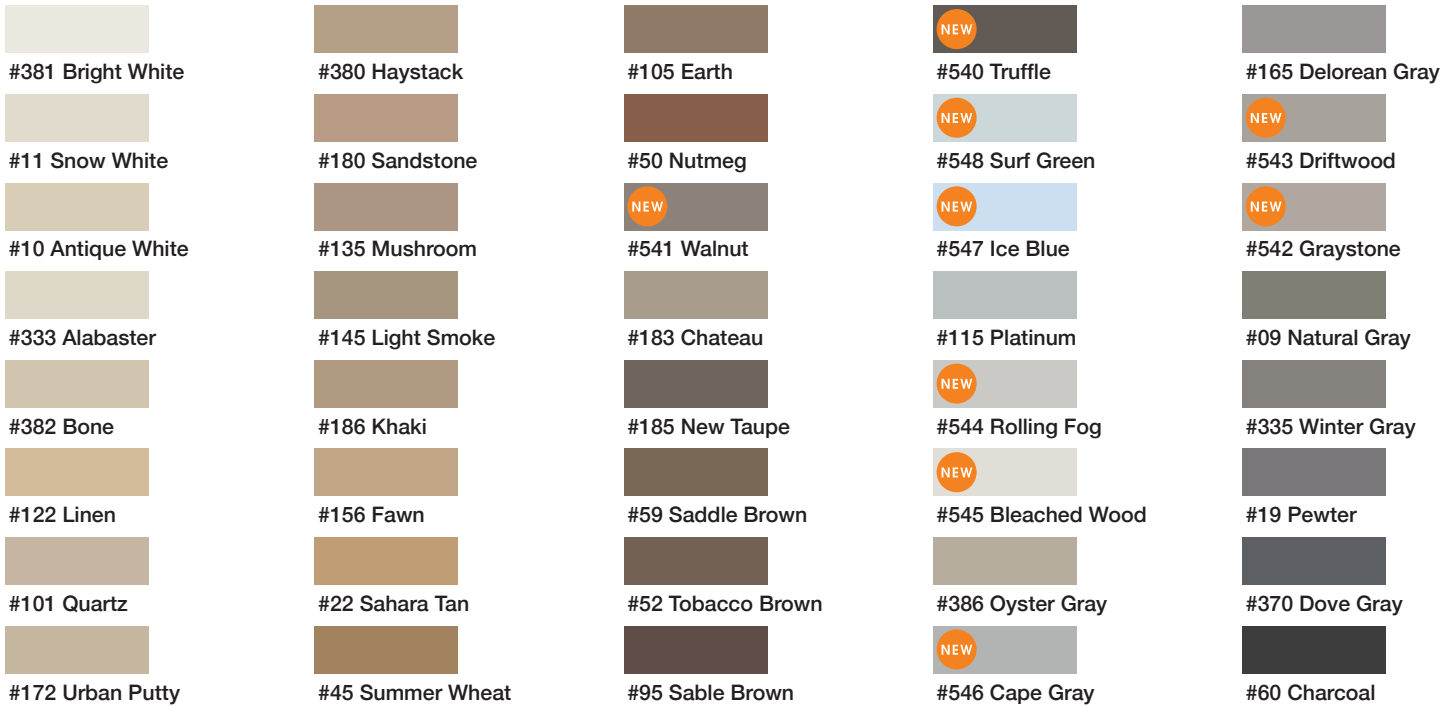

Sample colors shown generally approximate the color of the grout. Final installed color may vary. Please use our color card or grout kit for more accurate color representation.



- Reduces call backs
- No efflorescence
- Color consistent — No shading
- Fast setting. Develops high early strengths. Walkable in just 4 hours
- 17 lbs. (7.71 kg) covers the same area as a typical 25 lb. (11.34 kg) bag
- Meets ANSI A118.7
- For grout joints from 1/16" – 1/2" (1.6 – 13 mm)
- Polymer-modified cementitious grout

Coverage

Square Feet / M² per Unit of Grout (1 Package)

| TILE SIZE | JOINT WIDTH | | | | |
|--|----------------|-------------------|----------------|------------------|-----------------|
| | 1/8" (3 mm) | 3/16" (4.8 mm) | 1/4" (6 mm) | 3/8" (9.5 mm) | 1/2" (13 mm) |
| 1" x 1" x 1/4" 25 x 25 x 6 mm | 54 5.0 | 40 3.7 | 33 3.1 | 27 2.5 | 24 2.2 |
| 2" x 2" x 1/4" 50 x 50 x 6 mm | 96 8.9 | 68 6.3 | 54 5.0 | 40 3.7 | 33 3.1 |
| 4-1/4" x 4-1/4" x 1/4" 108 x 108 x 6 mm | 192 17.8 | 131 12.2 | 101 9.4 | 71 6.6 | 56 5.2 |
| 6" x 6" x 1/4" 150 x 150 x 6 mm | 266 24.7 | 181 16.8 | 139 12.9 | 96 8.9 | 75 7.0 |
| 12" x 12" x 3/8" 300 x 300 x 9.5 mm | 348 32.3 | 234 21.7 | 177 16.4 | 121 11.2 | 92 8.5 |
| 18" x 18" x 3/8" 450 x 450 x 9.5 mm | 518 48.1 | 348 32.3 | 262 24.3 | 177 16.4 | 135 12.5 |
| 24" x 24" x 3/8" 600 x 600 x 9.5 mm | 688 63.9 | 461 42.8 | 348 32.3 | 234 21.7 | 177 16.4 |
| 6" x 24" x 3/8" 150 x 600 x 9.5 mm | 279 25.9 | 189 17.6 | 143 13.3 | 98 9.1 | 75 7.0 |
| 12" x 24" x 3/8" 300 x 600 x 9.5 mm | 461 42.8 | 310 28.8 | 234 21.7 | 158 14.7 | 121 11.2 |

Chart for estimating purposes. Coverage may vary based on installation practices and jobsite conditions. For more tile and joint sizes, use the material calculator at CustomBuildingProducts.com or contact CUSTOM Technical Services at 800-282-8786.

©2015 Custom Building Products. All rights reserved. The CUSTOM® logo and select product logos are registered trademarks of Custom Building Products, Inc. CUSTOM may make product modifications at any time without notice. Visit custombuildingproducts.com for updated technical data sheets and MSDS information.

Custom Building Products
800-272-8786
custombuildingproducts.com
SS160 6/15R

