




FOAM UNDERLAYMENT AND POLYETHYLENE FILM


70-010 / 70-115

SERENITY FOAM UNDERLAYMENT - 70-010

For wood subfloors. Can also be used with concrete slabs with recommended MoistureBarricade 6 mil polyethylene film.



Comfort!
3/32" polyethylene foam underlayment for laminate and engineered wood flooring.

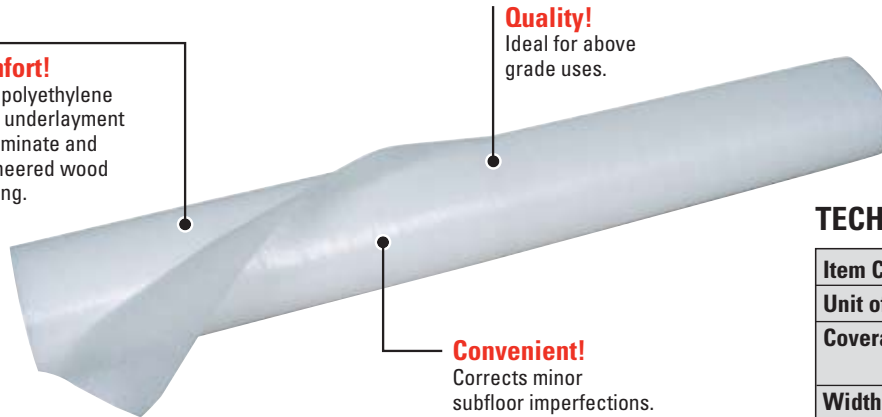

Quality!
Ideal for above grade uses.

Convenient!
Corrects minor subfloor imperfections.


TECHNICAL SPECIFICATIONS

Item Code:	70-010
Unit of Measure:	50 rolls per case
Coverage:	100 sq ft per roll 5000 sq ft per case
Width of roll:	4 ft (48")
Length of roll:	25 ft (300")
Thickness:	3/32"
Weight per roll:	1.5 lbs.
Diameter of roll:	6"

Can be used over radiant heat!

MOISTUREBARRICADE POLYETHYLENE FILM - 70-115

For use on concrete slabs for moisture protection. Do not use on wood subfloors.

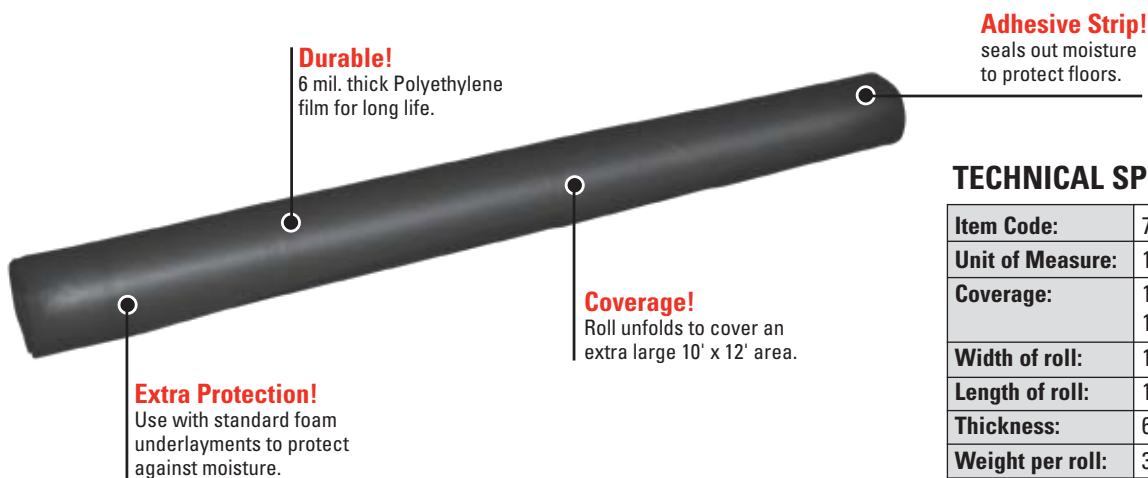

Durable!
6 mil. thick Polyethylene film for long life.

Adhesive Strip!
seals out moisture to protect floors.

Coverage!
Roll unfolds to cover an extra large 10' x 12' area.

Extra Protection!
Use with standard foam underlayments to protect against moisture.

TECHNICAL SPECIFICATIONS

Item Code:	70-115
Unit of Measure:	12 rolls per case
Coverage:	120 sq ft per roll 1440 sq ft per case
Width of roll:	10 ft (120")
Length of roll:	12 ft (144")
Thickness:	6 mil
Weight per roll:	3.20 lbs.
Diameter of roll:	3-3/4"

*This is not an underlayment

Roberts Consolidated Industries, Inc. • Boca Raton, FL 33487 • (800) 423 6545 • www.robertsconsolidated.com

Roberts Company Canada Ltd.
PH: 800 840 9422

O.E.P. Chile Limitada
PH: 562 622 6588

O.E.P. Australia Pty. Ltd.
PH: 011 61 3 9797 1888

Zocalis S.R.L.
PH: 541 14 765 9796

Estillon B.V.
PH: 0031 24 6485348

O.E.P. Co., N.Z., Limited
PH: 64 9 415 9700