



How Many Applications Can I Use at the Same Time?

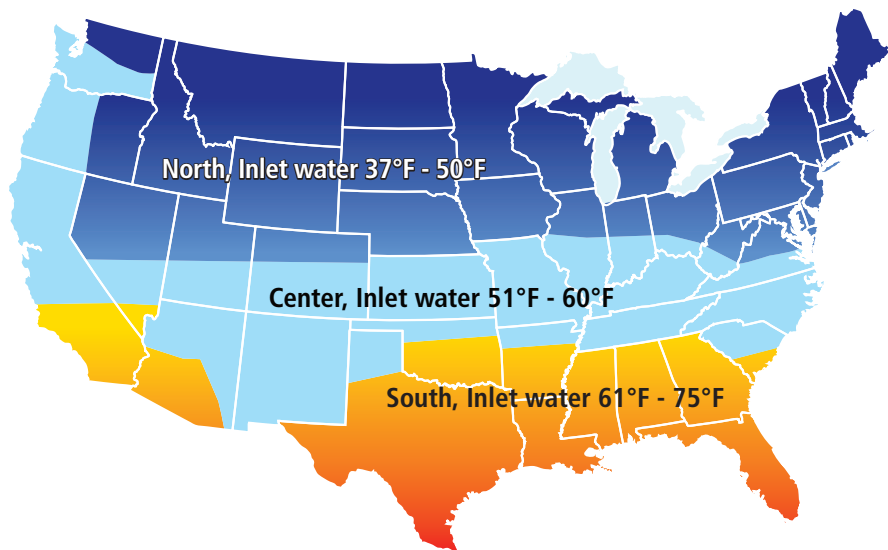

ATMOR
Hot Water On Demand

ThermoPro Digital Thermostatic Series

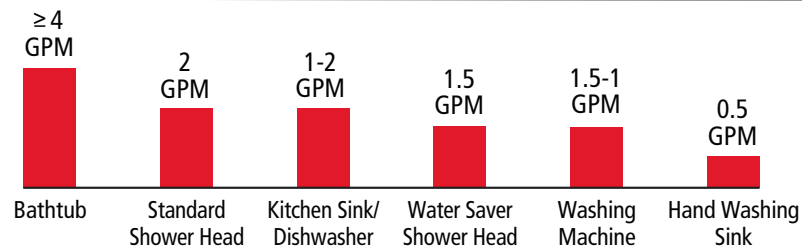

Capacity Chart		37°F - 50°F			51°F - 60°F			61°F - 75°F		
Model	Watts/Volts	Application	GPM Range		Application	GPM Range		Application	GPM Range	
AT-910-18TP 18kW/240V			1.9	2.4		2.4	2.85		2.85	4.2
			0	1		1	1		1	2
			1	1		1	1		1	2
AT-910-24TP 24kW/240V			2.45	3		3.0	3.6		3.6	5.0
			1	0		0	0		0	0
			1	0		0	1		1	1
AT-910-27TP 27kW/240V			2.63	3.3		3.3	4		4	5.8
			0	1		1	0		0	1
			2	0		0	2		2	2
AT-910-27TP 27kW/240V			1	2		2	2		2	3

GPM = Gallons per Minute

Chart above based on approximate simultaneous usage with 105°F output temperature.

ATMOR Temperature Rise Chart - Gallons Per Minute - Flow Rate (GPM):

	Flow Rate @ 28°F Temp. Rise	Flow Rate @ 33°F Temp. Rise	Flow Rate @ 36°F Temp. Rise	Flow Rate @ 38°F Temp. Rise	Flow Rate @ 43°F Temp. Rise	Flow Rate @ 45°F Temp. Rise	Flow Rate @ 48°F Temp. Rise	Flow Rate @ 53°F Temp. Rise	Flow Rate @ 54°F Temp. Rise	Flow Rate @ 58°F Temp. Rise	Flow Rate @ 63°F Temp. Rise	Flow Rate @ 68°F Temp. Rise	Flow Rate @ 74°F Temp. Rise	Flow Rate @ 81°F Temp. Rise
18kW	4.41	3.95	3.6 GPM	3.2	2.91	2.85 GPM	2.6	2.42	2.4 GPM	2.2	2 GPM	1.9	1.7	1.6 GPM
24kW	5.83	4.97	4.5 GPM	4.3	3.95	3.6 GPM	3.45	3.1	3 GPM	2.9	2.5 GPM	2.45	2.2 GPM	2 GPM
27kW	6.35	5.4	4.9 GPM	4.62	4.33	4 GPM	3.78	3.56	3.3 GPM	3.05	2.8 GPM	2.63	2.5 GPM	2.2 GPM

To further assist you with choosing the correct water heater for your need, please contact our support center at 1-888-783-6082 to speak with one of our live representatives or e-mail us at info@paragongroupusa.com