

875 DIA KO FOR BARREL LOCK


#14-2 CU7AL CONNECTOR

1/0-350MCM CU7AL LINE, LOAD, & NEUTRAL

2-1/2, 2, 1-1/2, 1-1/4, 1 KO (3) PLACES

NOTES:

- 1) 200 AMP CONTINUOUS  
600 VAC, 1 PHASE, 3 WIRE
- 2) FINISH: GRAY
- 3) CABINET: 16 GA GALV. STEEL
- 4) INHIBITOR SUPPLIED IN CONNECTORS
- 5) FOR BROOKS OR INNER-TITE STANDARD LENGTH BARREL LOCK IN CONJUNCTION WITH BROOKS LOCK GUARDS #865 OR #86505 WITH A PERMANENTLY WELDED BRACKET
- 6) TEMPORARY CARDBOARD METER OPENING COVER PROVIDED
- 7) SQUARE D LABEL ATTACHED TO THE END OF THE CARTON

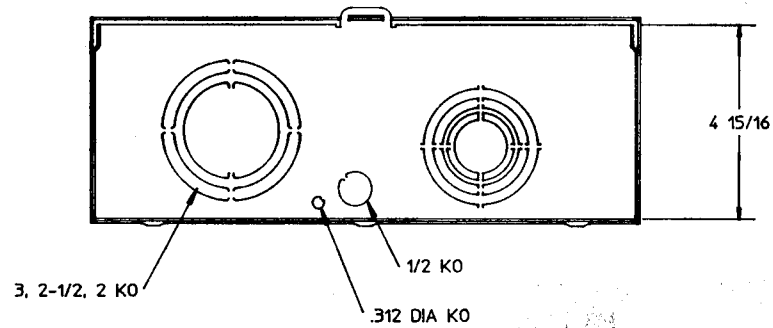

6-2-95

REVISED TO STNDRD MTR CVR

SKT 200A 1P ST

CATALOG NO. 1004967B-SQD

**THE DURHAM COMPANY**  
LEBANON, MISSOURI

DATE 12-31-92  
BY TC