

SENTRY WALLPACK LIGHT

SPEC SHEET



Catalog No. : SNTY80-PC-4K-BZ

Type : Wallpack Light

Project Name :

Location :

Qty :

Date :



Suitable for
Wet Locations



Product Features

PROBRITE'S Sentry 80 is a high-output LED wall pack that provides a high level of security lighting and includes a dimming option. Zero head adjustment when mounting makes this light dark-sky compliant, ensuring that light is directed towards the ground and not wasted up into the sky.

Application

Perfect for both commercial and residential locations, this fixture is ideal for retail complexes, loading bays, driveways and wall perimeter lighting.

PRODUCT PERFORMANCE AT A GLANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LPW	CRI	REPLACES (MH)
81W	73W	9940 lm	123 lm/w	≥70	200W

HOUSING

Diecast aluminum construction, stainless steel hardware, and a 120 degree adjustable head with full cut off option compact design

OPTICS

Direct LED distribution with tempered flat glass

FINISH

Fade, weather, and abrasion resistant with a powder coat finish. Finish is a dark bronze.

IP RATING & LISTINGS

LED light engine is weather proof rated IP66.

DLC 4.3, cULus


MOUNTING

Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Hands free mounting makes for easy installation.

WARRANTY


Fixture is covered by a 5-year limited warranty. See probrite.com/warranty for details.

PRODUCT LINE DRAWING

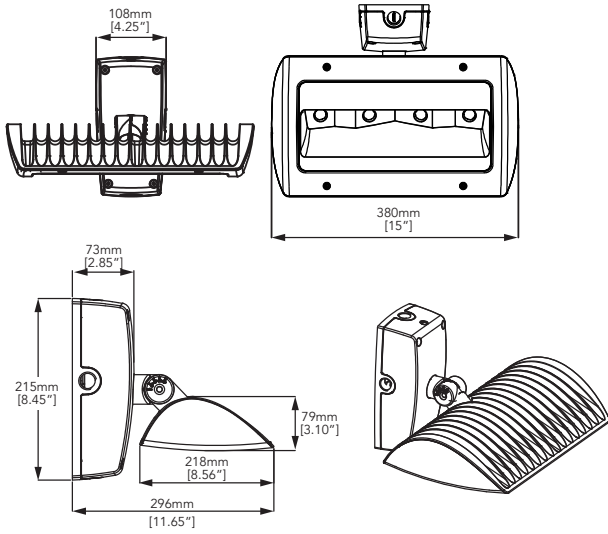

SUGGESTED MOUNTING HEIGHT:
8-15FT.(2.4-4.6M)


3D PHOTOMETRIC VIEW

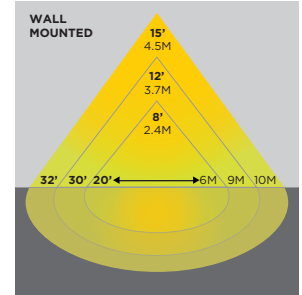

PRODUCT SPECIFICATIONS

Product Dimensions	: 15.00" x 8.45" x 11.65"
Weight	: 13.89lbs
Lumens	: 9940
System Wattage	: 81W
LED Wattage	: 73W
Efficacy	: 123
CRI	: 70
Replaces (MH)	: 200W
Mounting	: Wall mount
Frequency	: 50-60Hz
THD(Total Harmonic Distortion)	: <20%
PF(Power Factor)	: >0.9
Ambient Operating Temperature	: (-30) - 40°C
Input Voltage	: 120-277V
LED Chip	: Cited COB CLU038
Photocell	: Yes
Driver	: 0-10V Dimming
Standard Lifetime	: L70 >50,000hrs
Standard Warranty	: 5 Years
Water Proofing Grade	: IP65
CCT	: 4000K
Certifications	: DLC, UL/cUL

MOUNTED AT 15FT.

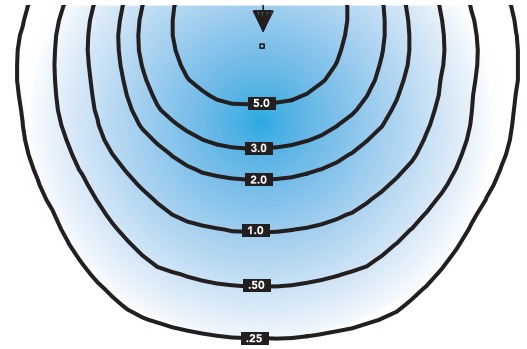

APPLICATION

