

FEATURES & SPECIFICATIONS

INTENDED USE — The ALT Series LED combines digital LED lighting and control technologies with a high-performance optical system to deliver general ambient lighting for many applications such as schools, offices, and residential. High efficacy light engine delivers long life and excellent color, ensuring a superior quality lighting installation that is highly efficient and sustainable. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Housing formed from cold-rolled steel. Housing is painted after fabrication for superior finish.

Smooth hemmed sides and smooth inward formed end flanges for easy handling.

Integral T-bar clips standard. Acrylic shielding material 100% UV stabilized.

OPTICS — Frosted acrylic tile provides superior efficiency and a clean quite appearance in the ceiling.

ELECTRICAL — Long life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 70% LED lumen maintenance at 50,000 hours (L70/50,000). Driver disconnect provided where required to comply with US and Canadian codes.

INSTALLATION — Drivers and internal components accessible. LED boards include plug in connectors for easy replacement or servicing. Suitable for direct insulation contact. Suitable for damp location.

LISTINGS — CSA certified to meet U.S. and Canadian standards. IC rated.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

2ALT

2' x 2' and 2' x 4' LED

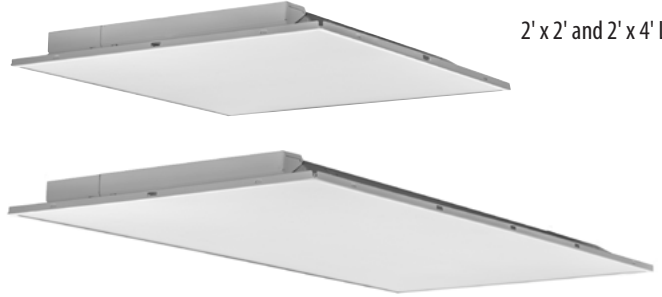

Specifications

Length: 24 (61.0) 2x2; 48 (122) 2x4

Width: 24 (61.0)

Depth: 3-3/4 (9.5)

All dimensions are inches (centimeters) unless otherwise specified.


ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Catalog Number	UPC	Description	Lumens	CCT	Voltage	Wattage	Pallet Qty.	Standard Carton Qty.
2ALT2 3400LM MVOLT DIM	889804945287	2x2 Lay-In Troffer	3217	82	120-277	34	28	1
2ALT4 5000LM MVOLT DIM	889804945300	2x4 Lay-In Troffer	4875	82	120-277	42	13	1

PHOTOMETRICS

2ALT2 3400LM MVOLT DIM, 3217 delivered lumens, test no. ISF 30574, tested in accordance to IESNA LM-79

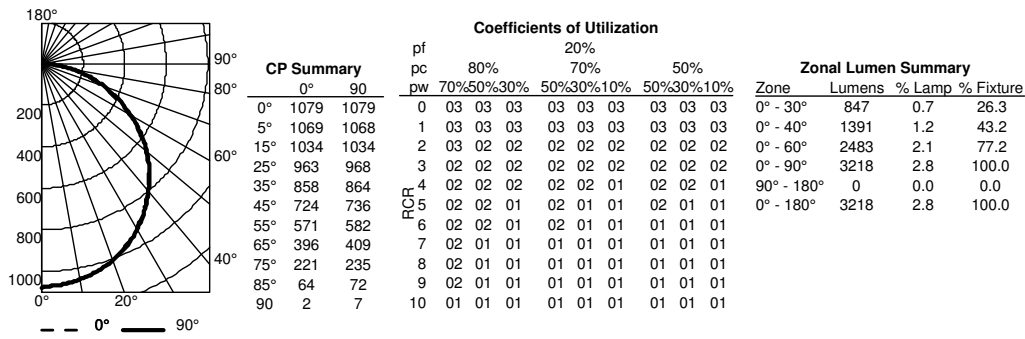

2ALT4 5000L MVOLT DIM, 4875.1 delivered lumens, test no. ISF 30721, tested in accordance to IESNA LM-79

