



Project: Date:

Prepared by:

Comments:



FEATURES

- 5 Year Warranty
- Direct Replacement for **2x2 Indirect/Direct Troffers**
- Energy Savings of up to 30%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Dimmable 0-10V
- No UV/IR Radiation, No Toxic Mercury
- Positive Locking Cam Latches
- No Exposed Fasteners
- Die Formed of 24 Gauge Post Painted Steel

OPTICS

- White Lens
- CRI 81

APPLICATIONS

- Dropped Ceiling Application for General Lighting in Offices Facilities
- Retail Store Lighting
- Museums, Galleries, Showrooms
- Hotels, Hospitality Areas
- Hospitals, Clinics, Workrooms
- Corridors, Lobbies, Stairways, Conference Rooms
- School, College, University Lighting

CERTIFICATIONS

- cULus Listed
- DLC Listed for Rebate and Tax Incentive Programs
- Lighting Facts Listed

SPECIFICATIONS

Part Number: **EVTR22DI23WD**

Warranty: 5 Years
Kelvin Temperature (CCT): 4000K
Wattage: 24.5 W
Lumens: 2200 lm
Efficacy 89.8 lm/W
CRI: 80
Dimmable: 0-10v Dimming
Input Voltage: AC 120~277V

Certifications: UL Listed
DLC Listed: Yes
Expected Life: 50,000 hrs
Max. Ambient Temperature: 113 F
Min. Ambient Temperature: 0 F
Power Factor: 0.90
THD: <20%

TECHNICAL

Weight: 11.00 lbs
Length: 23.77"
Product Height: 4.10"

Product Width: 23.77"
LED Beam Angel: 120° deg.
Number of Tubes: (2) FB32T840






Project: Date:

Prepared by:

Comments:

LINE DRAWINGS

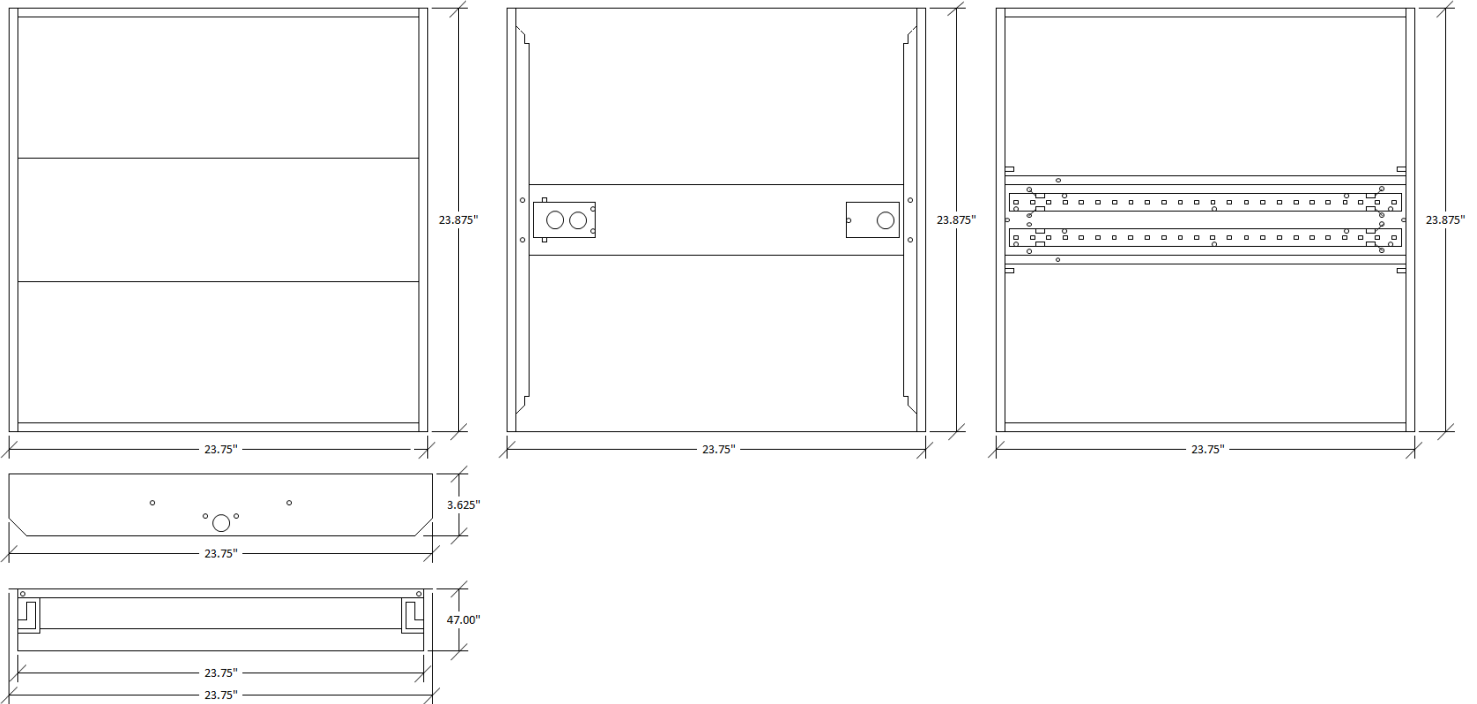

LIGHTING FACTS

EnviroLite

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens)	2200
Watts	24.5
Lumens per Watt (Efficacy)	89.8

Color Accuracy Color Rendering Index (CRI)	81
--	-----------

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008, Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: ZMBK-Y5P355 (12/16/2015)
Model Number: EVTR22DI23WD
Type: Luminaire - Troffer/Grid Ceiling