



**Basic Tools Required** (not included)


- Phillips Screwdriver
- Ladder

**Note:** Make sure that the awning cover you purchased exceeds the window width.  
**Allow for clearance for windows or doors that open outward.**

**General Comments**

- Wash your hands before installation when handling the fabric.
- Always be careful with the fabric during installation. Drills, screwdrivers and other items can puncture the fabric. Punctures during installation are not covered by the warranty.
- A second person to assist in holding the awning during installation is RECOMMENDED.

Included in awning replacement kit						
Item	Part Number	Description	Awnings Traditional & Classic			
			4ft	6ft	8ft	
I	1410010	Instructions Sheet	1	1	1	
K	N/A	Awning Fabric Cover	1	1	1	

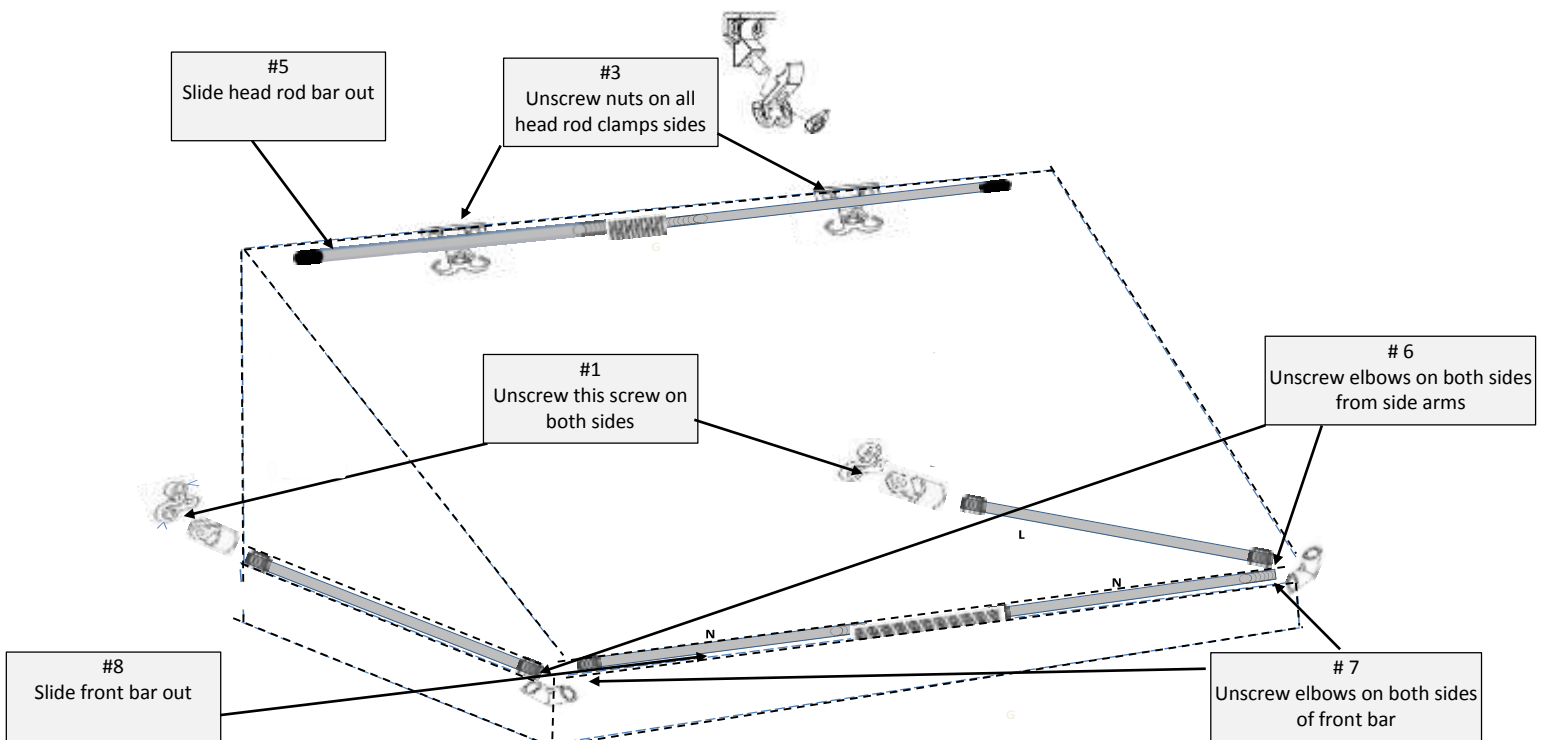


## **Traditional & Classic Awning Assembly and Mounting**

1. Unscrew the screw on each side of awning releasing the eye end from the camelback hinge



2. If have Optional pulley system installed  
(IF NO PULLEY SYSTEM IS INSTALLED SKIP TO #3)

- a) Remove pulley on the left head rod clamp hook. Remove two pulleys on the side with the pull cord.
- b) Untie cord from front bar

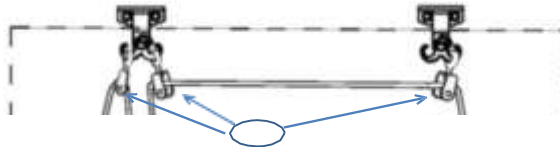


3. Remove wing nuts from head rod clamp allowing you to remove awning from wall




4. Lay awning on a clean surface
5. Slide the Head Rod bar out of head rod pocket (set aside)
6. Unscrew side bar from elbow and remove out of side bar pocket (do the same on both sides)
7. Unscrew elbow from front bar (do the same on both sides)
8. Slide front bar out of front bar packet(set aside)
9. Remove plastic from New Replacement cover.
  - a) Slide the front bar into the front bar pocket. (Located near the valance of awning)
  - b) Slide the Arms into the side pocket of awning.
  - c) Screw elbows on to front bar.
  - d) Screw side arms onto elbow
  - e) Slide head rod bar into head rod pocket
10. Holding awning by head rod bar place into head rod clamps and tighten wing nuts onto head rod clamp securing awning to wall.
11. Straighten the front bar; making sure the awning is level and straight.
12. Remove middle screw on the hinge and attach the Arms (eye end attached to the hinge). Tighten screw in slot.

### 13. Optional Pulley:

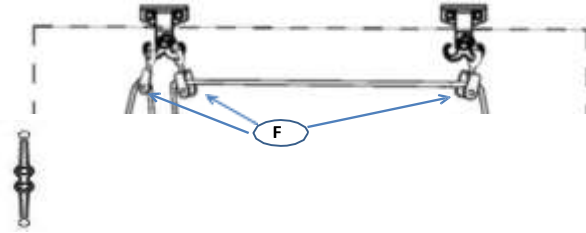

- a) Tie one end of the pull cord to the left front bar of the awning, thread through left side pulley, then over closet right side pulley and down to the cleat and back up to open right pulley, tie the end of pull cord to the right and left side of the front bar. Draw all slack in pull cord towards cleat and tie off. (Shown Below)

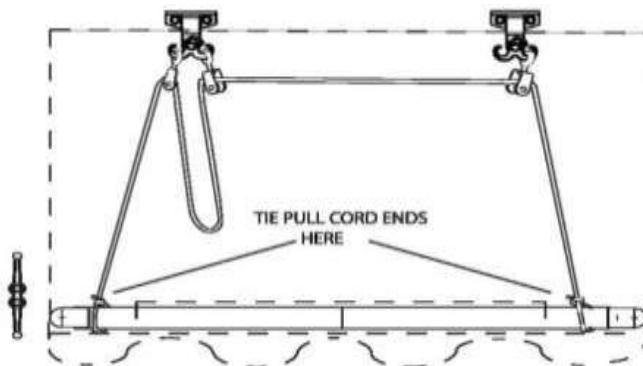

### Product Care and Maintenance

We use only quality fabrics in the manufacturing of our products, but fabrics do have a few limitations; therefore proper care of your awning is important to extend its life.

- Clean awning fabric with a mild soap solution as needed (every 3 months), rinse thoroughly with water and allow to air dry (never put fabrics in your dryer).
- Keep the underside of your awning clean by brushing with a household broom.
- Remove awning during extremely windy or cold weather to avoid damage to the awning.
- Treating your awning with a marine grade fabric cleaner and fabric guard will help increase its life.
- It's advisable to remove your awning in the winter to increase its life expectancy.
- Store awning in a dry area. **DO NOT** store in a non-breathable plastic bag.

### THE DON'T'S

- Don't spray insect repellent over fabric. Some solutions may cause staining.
- Don't permit leaves, twigs, and pine needles to accumulate and remain on the awning.
- Don't drag on abrasive surfaces.
- Don't wash with abrasive cleaners or bleaches for cleaning.

**Customer satisfaction and end user satisfaction is a number one concern and priority.**

**THE WARRANTY**

Warranties apply for 1 year from date of original purchase with proof of purchase (original receipt)

Customer satisfaction and end user satisfaction is a number one concern and priority.

**Awnings in a Box™**

- **Fabric** - 1 Year Limited Warranty against manufacturer's defects in the fabric or sewing

**Fabric** – 1 Year Limited Warranty against manufacturer's defects in the fabric or sewing

- Up to 3 months from the date of purchase full replacement of item includes shipping cover only
- Over 3 months and under 6 months from the date of purchase customer pays 50% of new item cover only
- Over 6 months and under 1 year from the date of purchase customer pays 75% of new item cover only

**Purchase information:**

Name of Store or online establishment item was purchased from:

Address or website of place of purchase:

Phone number of place of purchase:

Date of purchase (Must keep original receipt):

**Please keep the above information with original receipt and packing slip.**