



**QUESTIONS, PROBLEMS, MISSING PARTS?**

Before returning to your retailer, call our customer service department at 1-800-265-9960 9 a.m.-5 p.m., EST, Mon-Fri. cs@checkolite.com


**8 LIGHT CRYSTAL SPHERE CHANDELIER**

**PACKAGE CONTENTS**

**PART #**

A	1 x Fixture unit	14	
B	1 x Mounting bracket with threaded nipple and green screw	7,12,31	✓
C	3 x Wire nuts	5	✓
D	1 x Collar loop, with screw	27,28	
E	1 x Fixture unit tube	16	
F	1 x Canopy	29	
G	1 x Chain with c loops	26,24,33	
H	1 x Coupling with coupling screws	38,39	
I	1 x Light body with light body tube	15,17	


A.



G.



B.




H.



C.



I.



D.



E.



F.



**REPLACEMENT PARTS AVAILABLE MARKED BY : ✓**

**⚠ WARNINGS AND CAUTIONS**

- TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.
- If in doubt about electrical installation, consult a licensed electrician.

**PREPARATION**

Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Estimated Assembly Time: 30 minutes

Tools Required for Assembly: Phillips screwdriver and electrical tape (not included)

Helpful Tools: Wire cutter (not included)

## ASSEMBLY INSTRUCTIONS

Step 1: Carefully remove package contents on top section of foam.

Step 2: Locate fixture unit door (36), and detach by removing fixture unit screws (37). FIG. 1

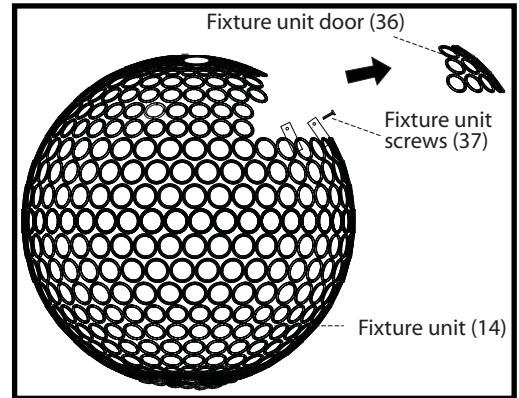


FIG. 1

Step 3: Slip electrical and ground wires from light body (15) through light body tube (17). Thread light body tube (17) into coupling (13) on light body (15). FIG. 2

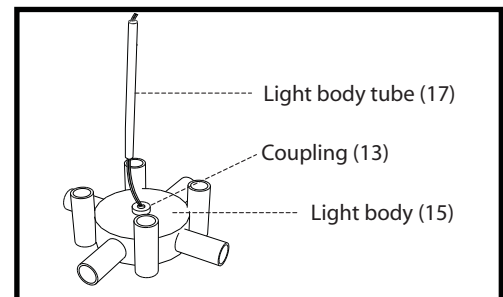


FIG. 2

Step 4: Fit the light body (15) through the open section of fixture unit (14) and slip electrical and ground wires up through top center hole of fixture unit. Secure light body (15) to fixture unit coupling (38), by tightening bottom coupling screw (39A) FIG. 3

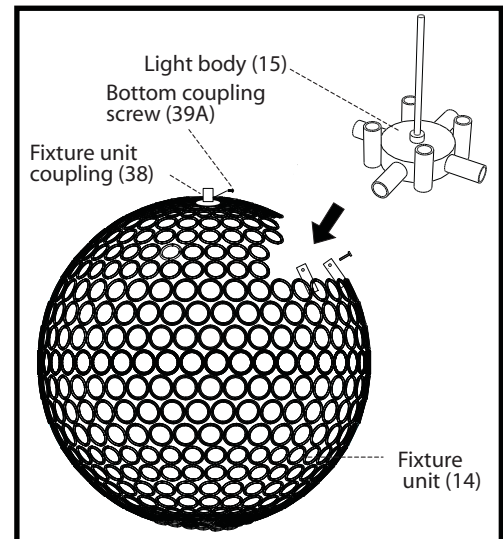


FIG. 3

Step 5: Slip electrical and ground wire through fixture unit tube (16). Screw fixture unit tube (16) into fixture unit coupling (38) and tighten with upper coupling screw (39B). Install light bulbs. Screw fixture unit door (36) back onto fixture unit (14) and tighten using the fixture unit screws (37). FIG. 4

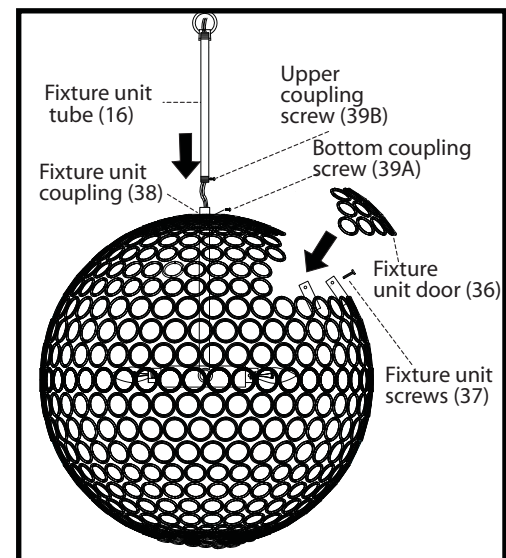


FIG. 4

NOTE: (Remember section on opening and closing fixture unit door for future bulb replacement).

## INSTALLATION INSTRUCTIONS

Step 1: TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.

Step 2: Fasten mounting bracket (7) with pre-assembled threaded nipple (31) onto the outlet box (8) using two outlet box screws (9). Slip canopy(29) over threaded nipple (31) and set in lowest position with fastener (5) by tightening fastener screws (6). Attach collar loop (27) into threaded nipple (31) and lock tight with screw on collar loop (28).


Step 3: Open "C" loop (33) by unscrewing the threaded collar (34). Insert one end of chain(26), and then attach "C" loop (33) to the threaded ring (30). Close the threaded collar (34).

Open "C" loop (24) by unscrewing the threaded collar (25). Insert other end of the chain (26) into the "C" loop (24), and then attach "C" loop (24) to the collar loop (27). Close the threaded collar (25). (If shorter chain is desired, adjust chain to desired length by taking out chain links).

Step 4: Carefully feed fixture unit cord and ground wire up through chain (26), weaving it through chain links. Feed remaining wire through collar loop (27) and through the threaded nipple (31) into outlet box (8).

Step 5: Strip ¾ in. of insulation from end of fixture wire and supply circuit wires. Attach ground supply circuit wire (10) and ground fixture wire (11) together with wire nut (5). Never connect ground wire to black or white power supply wires. Twist stripped wire ends of fixture and supply circuit wires together ribbed wire to black (hot) (3) and smooth wire to white (neutral) (4). Twist on wire nuts (5). Tape wire nuts and wires together.

Step 6: Make sure all wires are tucked in place inside outlet box (8). Slip canopy (29) up against ceiling, and lock with fastener screws (6).

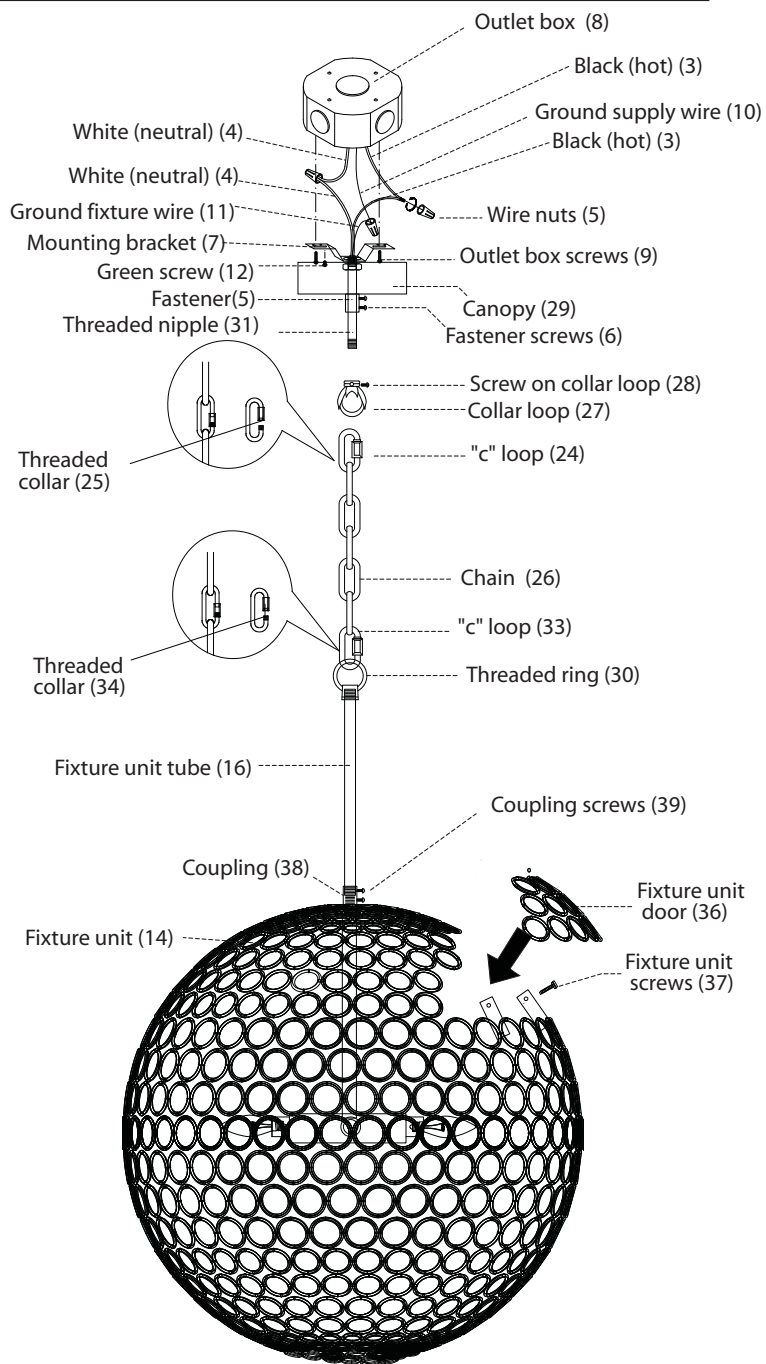

## CARE AND MAINTENANCE

- Clean with soft dry cloth. Do not use abrasives.
- Bulb replacement uses 8 x 40 watt type B10 candelabra base bulbs. Shut off main power supply before replacing bulbs.

## TROUBLESHOOTING

Problem	Possible Cause	Corrective Action
Bulb won't light.	<ol style="list-style-type: none"> <li>1. Bulb is burnt out.</li> <li>2. Power is off.</li> <li>3. Faulty wire connection</li> <li>4. Faulty wall on/off switch</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace light bulbs.</li> <li>2. Check if power supply is on.</li> <li>3. Check wiring.</li> <li>4. Test or replace wall on/off switch.</li> </ol>

## WARRANTY

---

Checkolite International Inc, a New Jersey Corporation, having its principal place of business at 142 Charles St., Jersey City, NJ 07307 (Checkolite) warrants its products (the "Products") as follows:

1. Limited Warranty.

Manufacturer warrants that the Products sold hereunder will be free from defects in material and workmanship for a period of one (1) year from the date of purchase. If the Products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer's satisfaction that said defects are covered by this Limited Warranty. If the defects and proof of purchase are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, at its own expense, furnish replacement Products or, at Manufacturer's option, replacement parts for the defective Products. Shipping and installation of the replacement Products or replacement parts shall be at Buyer's expense.

2. Exclusive Obligation.

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective Products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.

3. Other Statements.

Manufacturer's employees or representatives' ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES, shall not be relied upon by Buyer, and are not a part of the contract for sale or this limited warranty.

4. Entire Obligation.

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.