


# Assembly Instructions: 5907-1W (Bradley)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!


For Customer Service, contact the place of purchase.

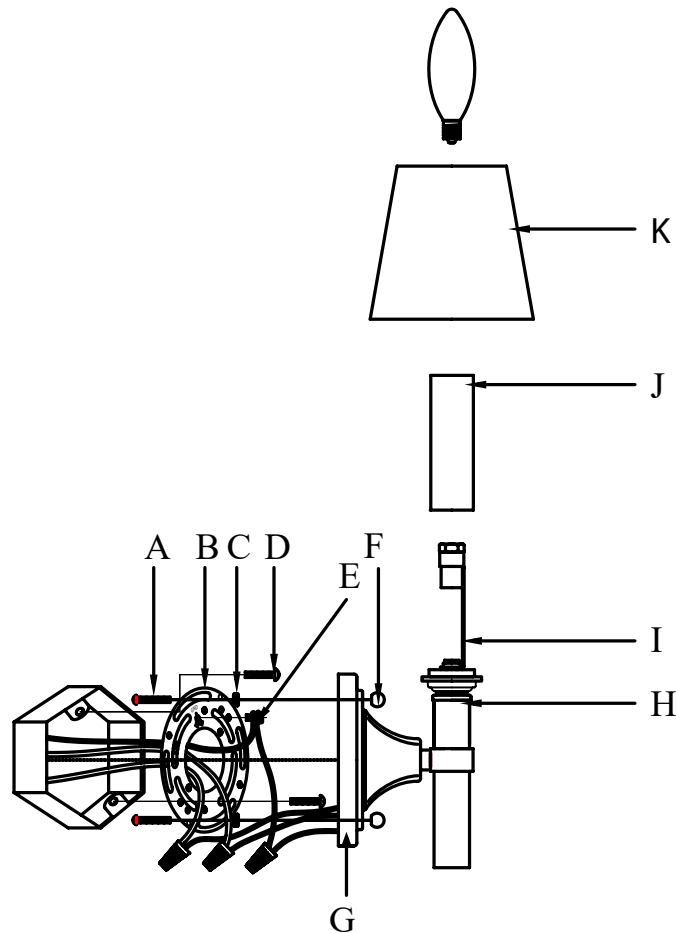

## PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

Backplate (G) should have mounting strap (B) attached, with mounting screws (A) attached. Use a screwdriver to carefully loosen the screws and remove the mounting strap from the backplate. Replace the screws in the mounting strap. Be sure that mounting strap (B) is centered over the junction box so that the fixture hangs straight when mounted. Use mounting screws (D) to secure mounting strap (B) to the junction box. Tighten the screws securely. Mounting screws (A) should protrude through the front of the mounted mounting strap (B).

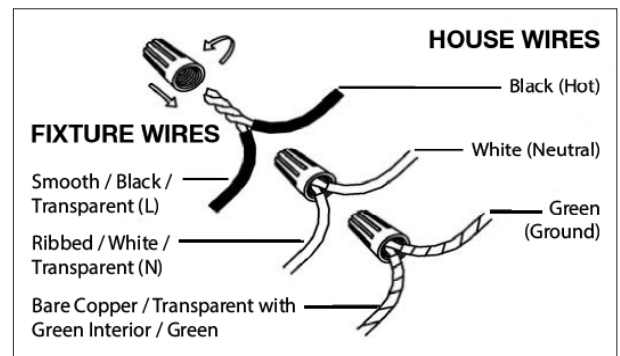

## CONNECTING THE WIRES

Have an assistant support the fixture's weight while completing the wiring. Cut away excess wire. Thread the fixture's wires through the backplate.

Attach the fixture's wires to the power supply wires from the junction box. Connect black to smooth/black/transparent (L) wire; white to ribbed/white/transparent (N) wire; ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction.

If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket/mounting strap. Tuck all wires.

## FINISHING THE INSTALLATION

Push backplate (G) up to the mounting strap and tightly thread deco nuts (F) into the top and bottom of backplate (G).

Slide candle sleeve (J) over socket (I). If using metal shade (K), carefully push metal shade (K) over candle sleeve (J). Twist a light bulb (not provided) into socket (D) in accordance with the fixture's specifications. Do not exceed the maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.