

Features

- Powder-coat aluminum construction with a durable rust-free finish.
- Two adjustable tempered-glass shelves.
- Full-overlay mirrored door.
- White powder-coat interior.
- Two-way adjustable hinges with 108-degree opening capability for easy cabinet access.
- Can be installed with left- or right-hand swing.
- Includes mounting hardware for surface or recessed installation.
- Includes side mirror kit for surface mount installation.
- Optional decorative Shaker frame available, K-99575-15.

Material

- Powder-coat aluminum.



Codes/Standards

None Applicable

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CA1	
--	-----	--

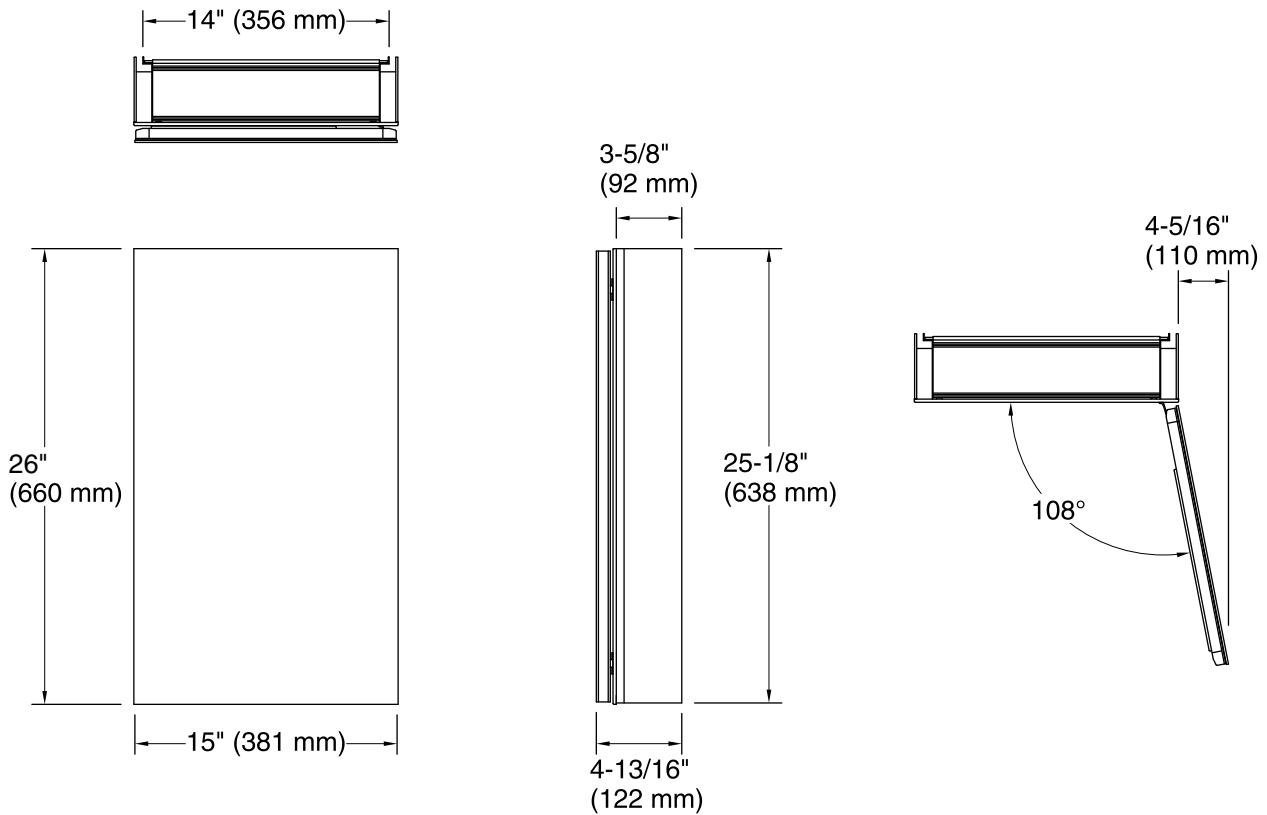

Technical Information

All product dimensions are nominal.

Mirror type: Wall-mount pivot

Recess-Mount Cutout:

Width: 14-1/4" (362 mm)

Height: 25-1/4" (641 mm)

Depth: 3-11/16" (94 mm)

Notes

Install this product according to the installation instructions.

To determine the height of the cabinet, ensure the door will clear all obstacles (such as a faucet). A minimum 3" (76 mm) distance is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (not provided) must be inserted before installing the screws.

To recess mount, the wall cavity must be framed and the cabinet secured to framing studs. Reroute electrical or water supply lines from the cavity. Consult a professional if drain or vent piping is encountered, or if the wall is load-bearing.

Cutout for recess-mount installations: 14-1/4" (362 mm) width x 25-1/4" (641 mm) height x 3-11/16" (94 mm) depth.