

SharkBite® Check Valve


DESCRIPTION

The Cash Acme SharkBite® Check Valve is a general purpose spring Check Valve that prevents the reverse flow of water. The SharkBite® Check Valve can be installed horizontally and vertically and can be connected in seconds to copper tubing, and CTS CPVC and Pex.

FEATURES AND BENEFITS

Instant push-fit connections for increase ease of use:
No soldering, clamps, unions, or glue required.

Designed for vertical and horizontal installation:
Flexible installation options in new or existing plumbing systems.

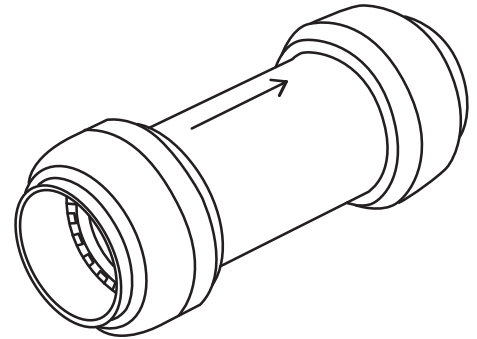


SPECIFICATION DATA

Performance:

Maximum pressure 200 psi
 Maximum temperature 150°F (65°C) (water)
 Service Water

Materials:

Body Brass
 O-ring EPDM
 Cartridge & demount ring. Acetal
 Protection ring Nylon
 Grab ring Stainless steel
 Tube Support Liner. Polysulfone

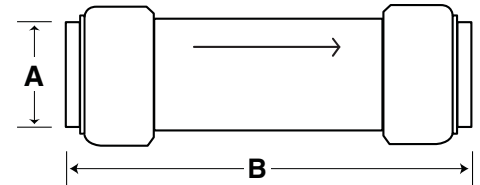

| Dimensions | A [mm] | B [mm] |
|-------------------|--------------|--------------|
| 1/2" (U2008-0000) | 1/2" [12.7] | 2.66" [67.6] |
| 3/4" (U2016-0000) | 3/4" [19.05] | 3.26" [82.8] |
| 1" (U2020-0000) | 1" [25.4] | 3.88" [98.4] |

CONNECTIONS

SharkBite® 1/2" through 1"