




REMOVING A BULB



1. GET THE RIGHT HEIGHT. First, adjust the length of the pole to reach the bulb.



2. OPEN THE GRABBER. Next, pull down on the base to open the grabber fingers.

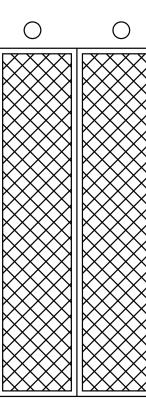

INSERTING A BULB



1. GRAB A BULB.

First, plant the Bulb Grabber on the ground and pull down on the neck to open the fingers. Continue pulling down on the neck and, with your other hand, place a bulb in the fingers. Release the neck to grab hold of the bulb.



2. ADJUST THE HEIGHT. Next, with the bulb secure, adjust the length of the pole to reach the fixture.



3. GRAB THE BULB. With the fingers around the bulb, release the base to grab hold of the bulb. Then, rotate the pole counterclockwise to unscrew the bulb.



3. SCREW IN THE BULB. Rotate the pole clockwise to screw the bulb into the fixture.

↓ ↓

4. RELEASE THE BULB. Next, plant the Bulb Grabber on the ground. Finally, with one hand on the bulb and the other hand on the neck of the Bulb Grabber, pull down on the neck to open the fingers and release the bulb.



AVOID POWER LINES AND OPEN WIRES. WEAR SAFETY GLASSES WHEN CHANGING BULBS.

1-Year Manufacturer's Warranty Located Inside Package С



4. RELEASE THE BULB. Finally, with the bulb secure in the fixture, pull down on the base of the grabber to release the bulb.



www.bulbgrabber.com Patent Pending Made in China