





## Quick Reference Guide

SLIMLINE SERIES

METAL SERIES

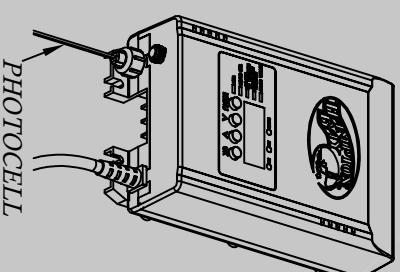

PHOTOCELL

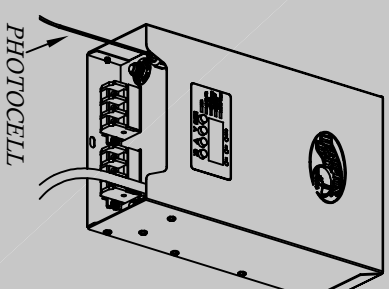

PHOTOCELL

**ALWAYS CONNECT THE PHOTOCELL BEFORE SET**

THIS QUICK REFERENCE GUIDE CAN BE  
DOWNLOADED FROM [WWW.HAMPTONBAY.COM](http://WWW.HAMPTONBAY.COM)

### ● TIME ON/OFF (Photocell is not needed, use Cap provided)

EX: To set the light on at 6:30 PM and off at 1:20AM.

1. Press MENU button to choose TIME ON/ OFF mode, the green light lit and the screen flash, press OK button. When ON is displayed, press OK button.
2. AM and PM LED lights flash, press UP/DOWN button to choose PM, press OK button.
3. Hour position flashes, press UP/DOWN button to adjust the hour to 6 then press OK button.
4. Minute position flashes, press UP/DOWN button to adjust the minute to 30 then press OK button. OFF would be displayed then press OK button.
5. AM/PM LED lights flash, press UP/DOWN arrow button to choose AM. Press OK button.
6. Hour position flashes, press UP/DOWN button to adjust the hour to 1 then press OK button.
7. Minute position flashes, press UP/DOWN button to adjust the minute to 20 then press OK button. Current time will be displayed. Time on/off mode is now set.

### ● Remark

1. Any misoperation can be re-set by pressing MENU button.
2. For further function setting, please see the Use and Care Guide.
3. Press MENU button and the timer modes will cycle through. The green indication light will show the current mode selection. Any mistakes can be canceled by cycling back through the MENU button and starting the operation over again.
4. Press the resettable overload breaker located at the bottom if the transformer is tripped.

● **Default Factory Setting** is "Photo Cell Auto On/ Off" mode. No additional setup is needed if this is the desired mode after the photo cell is connected.

● To Restore original factory setting, press and hold the OK button for 3 seconds. The display shows 88:88 and resets to 12:00 after 1 second. The "PhotoCell Auto On/ Off" mode green light flashes, press OK button.

● **MANUAL ON/OFF**

1. Press **MENU** button to select **MANUAL ON/OFF** mode. Green light illuminates and display flashes, press OK button.
2. Press **UP** arrow button, the landscape lights will illuminate. Press **DOWN** arrow button, the landscape lights will turn off.

● **PHOTOCELL AUTO ON/OFF (Default factory setting)**

Press **MENU** button to select **PHOTOCELL AUTO ON/OFF** mode. Green light illuminates and display flashes, press OK button. The landscape lights will turn on at night and off at daytime automatically.


**SET CLOCK INSTRUCTION (ONLY NEEDED FOR PHOTOCELL ON/TIME OFF and TIME ON/OFF)**

● **SET THE CLOCK**

- EX: To set the current time at 10:20 PM.
1. Press **MENU** button to choose **CLOCK** mode, the green light lit and the screen flash, press OK button.
  2. AM and PM LED lights flash, press **UP/DOWN** button to choose PM, press OK button.

3. Hour position flashes, press **UP/DOWN** button to adjust the hour to 10 then press OK button.

4. Minute position flashes, press **UP/DOWN** button to adjust the minute to 20 then press OK button. Current time will be displayed. Clock mode is now set.



● **PHOTOCELL ON/ TIME OFF**

EX: To set the landscape lights to turn on at night and off at 11:30 PM automatically.

1. Press **MENU** button to select **PHOTOCELL ON/ TIME OFF** mode. Green light illuminates and display flashes, press OK button. The display shows "OFF", press OK button.
2. AM and PM lights flash, press **UP/DOWN** button to select PM then press OK button.
3. Hour position flashes, press **UP/DOWN** button to adjust the hour to 11 then press OK button.
4. Minute position flashes, press **UP/DOWN** button to adjust the minute to 30 then press OK button. The current time is now displayed. The **PHOTOCELL ON/TIME OFF** mode is now set.