


USE AND CARE GUIDE

3 LIGHT LED PENDANT

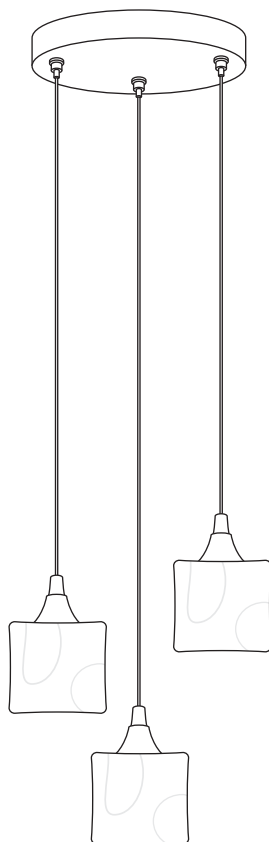

Questions, problems, missing parts? Before returning to the store,
call Home Decorators Collection Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-800-986-3460

HOMEDEPOT.COM/HOMEDECORATORS

THANK YOU


We appreciate the trust and confidence you have placed in Home Decorators Collection through the purchase of this light fixture. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Home Decorators Collection!


Table of Contents

| | | | |
|----------------------------|---|-------------------------|---|
| Table of Contents..... | 2 | Hardware Included..... | 3 |
| Safety Information..... | 2 | Package Contents | 4 |
| Warranty..... | 2 | Installation | 5 |
| Pre-Installation | 3 | Operation | 6 |
| Planning Installation..... | 3 | Care and Cleaning | 6 |
| Tools Required..... | 3 | Troubleshooting..... | 6 |

Safety Information

- Consult a qualified electrician if you have any electrical questions.

 **CAUTION:** Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation. Please call our Customer Service Team at 1-800-986-3460.

 **WARNING:** Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

Warranty

The manufacturer warrants this lighting fixture to be free from defects in materials and workmanship for a period of three (3) years from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alterations, neglect, or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear. The manufacturer does not warrant and specially disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor / expense costs involved in the replacement or repair of said product.





Contact the Customer Service Team at 1-800-986-3460 or visit www.homedepot.com/homedecorators.

Pre-Installation

PLANNING INSTALLATION

- Read all instructions before installation.
- To avoid damaging this product, assemble it on a soft, non-abrasive surface, such as carpet or cardboard.
- Keep your receipt and these instructions for proof of purchase.





TOOLS REQUIRED



HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.



| Part | Description | Quantity |
|------|-----------------|----------|
| AA | Mounting unit | 1 |
| BB | Support screw | 2 |
| CC | Mounting screw | 2 |
| DD | Nut | 2 |
| EE | Ball nut (10mm) | 2 |
| FF | Wire nut | 3 |

Pre-Installation (continued)

PACKAGE CONTENTS

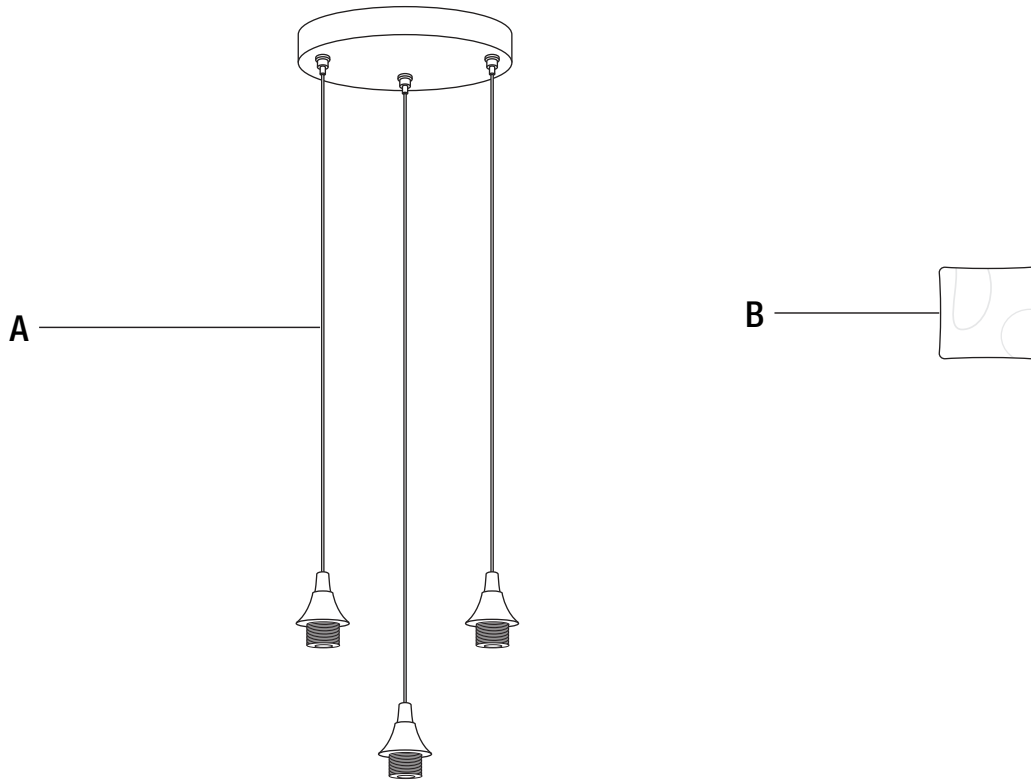

| Part | Description | Quantity |
|------|---------------|----------|
| A | Light fixture | 1 |
| B | Crystal shade | 3 |


Installation

1 Attaching the mounting unit to the junction box

- Screw the support screws (BB) into the mounting unit (AA). Secure with the two nuts (DD).
- Attach the mounting unit (AA) to the junction box (not included) with mounting screws (CC).



NOTE: The support screws (BB) on the mounting unit (AA) should protrude out away from the junction box.

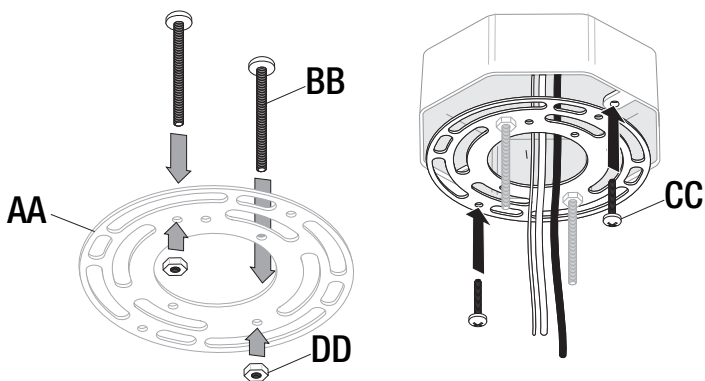


2 Making the electrical connections

- Connect the copper wire from the light fixture (A) to the mounting unit (AA) by securing it with the pre-installed ground screw.
- Connect black wire to black (power) wire coming out of the junction box, the white wire (neutral) to white wire coming out of the junction box and copper/green wire to the ground wire with wire nuts (FF) and secure with electrical tape (not included).





NOTE: If the wires from the fixture are the same color, attach the side with markings or letters to the black (positive) wire and the other to the white (neutral) wire.

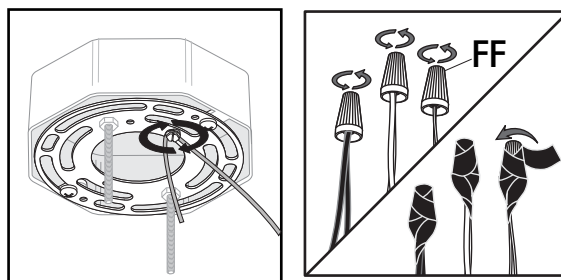



3 Installing the light fixture

- Secure the canopy (A) to the junction box by placing the holes in the canopy (A) over the support screws (BB). Secure with the ball nuts (EE) as shown.
- Screw the crystal shades (B) to the lamp holder.

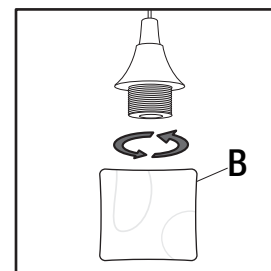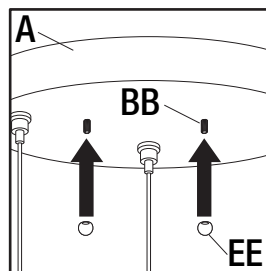

4 Adjusting the height of the light fixture

- To shorten the length of the cords push the cord up into the pipe nipple and it will lock automatically.
- To lengthen the cords push the tip of the pipe nipple to release the lock so that cord can be pulled out.

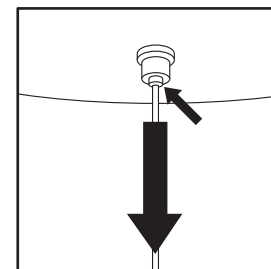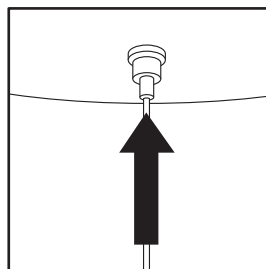

Operation

1 Turning the light on

- Turn the light switch on to activate the fixture.

Care and Cleaning

- Clean the lamp with a soft, dry cloth.
- Do not use any cleaners with chemicals, solvents, or harsh abrasives.

Troubleshooting

| Problem | Possible Cause | Solution |
|--|---|---|
| The fuse blows or circuit breaker trips when the light is turned on. | There are crossed wires or the power wire is grounding out. | Check the wire connections. Contact a qualified electrician or call the Customer Service Team at 1-800-986-3460. |

HOME DECORATORS COLLECTION

Questions, problems, missing parts? Before returning to the store,
call Home Decorators Collection Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-800-986-3460

HOMEDEPOT.COM/HOMEDECORATORS

Retain this manual for future use.