


Lighting Control in the palm of your hand.

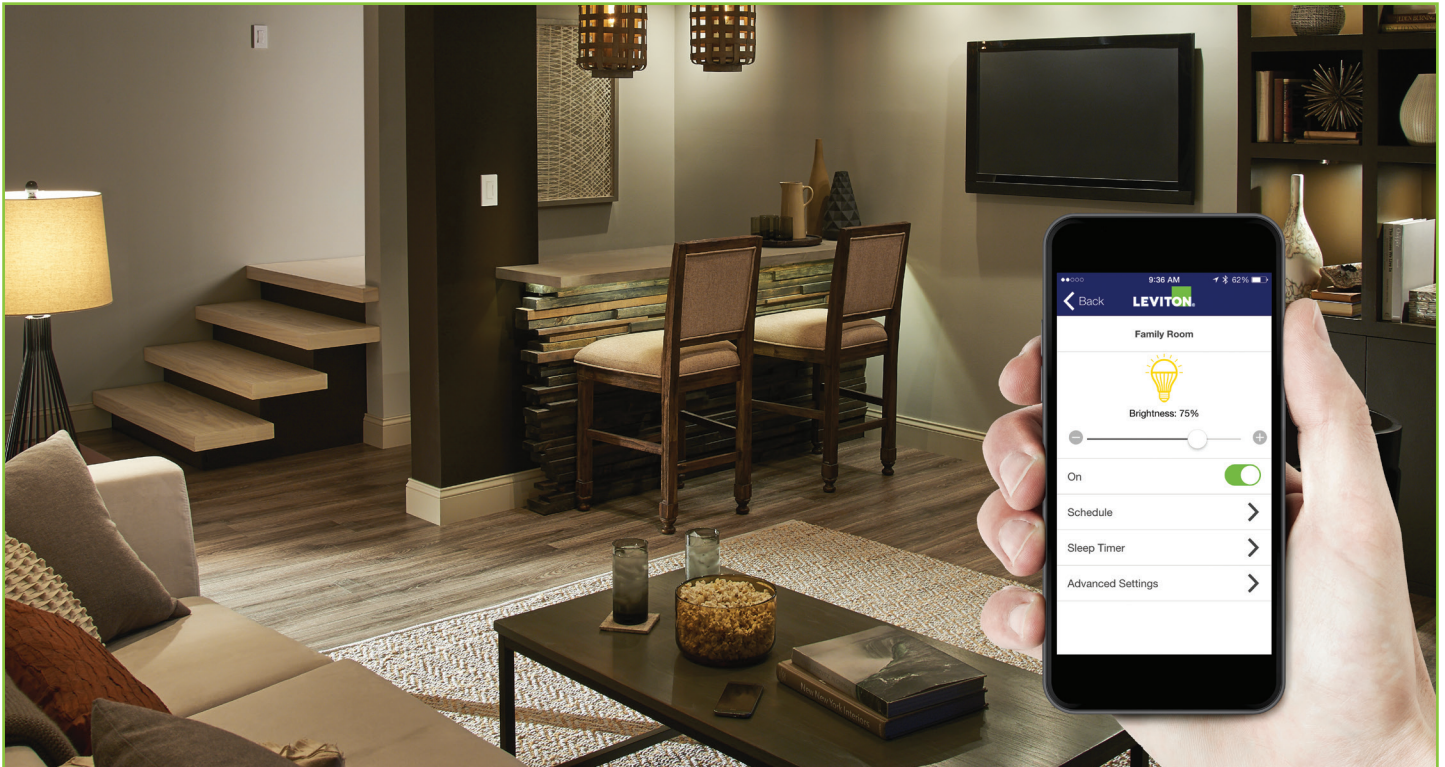

Dim and Time Lighting via App

The next generation of lighting control technology is here with Decora® Digital Controls with Bluetooth® technology. These innovative devices work using the Decora Digital Dimmer & Timer App that can be downloaded to smartphones or tablets and paired to the Leviton Dimmer or Switch using Bluetooth technology. Decora Digital Controls provide local control within a 30-foot* range without the need of a hub, gateway or internet connection, bridging the gap between traditional dimmers and whole-house automation systems.

Decora Digital Dimmer - a powerful device combining the best of Leviton dimmer and timer functions with today's technology. Just use your smartphone or tablet to control, adjust and time lighting for daily activities or to ensure a "lived-in" look while away.

Decora Digital Switch - users enjoy the combined functions of a standard wall switch and a countdown or programmable timer switch in one attractive device. Using the app to set timer functions makes it quick and easy to control lights.

Decora Digital Dimmer & Timer App - compatible with Apple and Android smartphones or tablets; offers simple, intuitive on-screen menu options to independently control dimmers and switches within a 30-foot range.

Decora Digital Devices are ideal for living rooms, bedrooms, kitchens, dining rooms, home offices, outdoors or anywhere full control of lighting is desired.



Features and Benefits

Decora Digital Devices

- New design for contemporary style
- Basic Dimmer only model available (no timer or Bluetooth functionality)
- Superior versatility provides six product options in each box
 - 3 changeable face plates
 - Single pole, 3-way/multi-location
- Gloss finish complements any décor
- Preset light level option automatically turns lights on to set level each use
- Customize maximum light level for energy savings
- Ability to set low end dimming range for select LED lamps to optimize dimming performance
- Digital circuitry provides soft on and fade off appearance with ability to program fade rates
- Dimmer brightness display can be turned off
- Compatible with Decora and Decora Plus™ screwless wallplates
- Meets all applicable UL, CSA and FCC requirements
- Limited 5-year warranty

Decora Digital Devices with Bluetooth Technology

- Control manually or using free iOS or Android app
- Bluetooth compatibility provides local control within a 30-foot* range
- Each device can be named for easy identification
- App is used for all programming of dimmer and timer functions

* 30-foot Bluetooth range: Range may vary depending on specific conditions of installation, configuration of walls, obstacles and other factors.

- Flexibility to program timed events weekdays, weekends or any combination of days at set or random times
- Astronomical clock, automatically set through connection with smart device, adjusts to local sunrise/sunset times
- Automatic daylight saving time adjustment
- Countdown sleep timer can be set for up to 12 hours
- LED locator light can be turned off via app
- Dimmers offer control of brightness level
- DDS15 Switch includes rechargeable battery that keeps time during temporary power outages

Typical Specifications

- Operating Temperature Range - 0°C - 40°C
- Storage Temperature Range - 10°C - 85°C
- Relative Humidity - 0% - 98%

Agency Standards and Compliance

Dimmer

- Complies with UL 1472
- FCC Listing Part 15 and Part 18
- Bluetooth SIG Certification on Bluetooth models

Switch

- Complies with UL 917
- CSA Certified to Standard 177
- Bluetooth SIG Certification
- Title 24 Compliant

Decora Digital Specifications At-A-Glance



Devices with Bluetooth Technology				Digital Dimmer Only
Cat. No.	DDMX1-BL	DDL06-BL	DDS15-BD*	DDL06-1L
Product	1000W Dimmer/Timer	600W Dimmer/Timer	Dual Voltage Switch/Timer	600W Dimmer
Voltage	120VAC	120VAC	120/277VAC	120VAC
Load Rating				
Incandescent/Halogen	1000W	600W	1800W	600W
LED/CFL	450W	300W	600W, 5A	300W
Magnetic Low Voltage	1000VA	-	-	-
Fluorescent	1000VA	-	15A, 6A	-
Motor	-	-	1/2 HP	-
Specifications				
Dimmer	Yes	Yes	No	Yes
Timer	Yes	Yes	Yes	No
Switch Type	Single Pole/3-Way or Multi-Location	Single Pole/3-Way or Multi-Location	Single Pole/3-Way or Multi-Location	Single Pole/3-Way or Multi-Location
Bluetooth Enabled	Yes	Yes	Yes	No
Required Wiring	Neutral	Ground	Neutral	Ground

*Title 20/24 Compliant



Remotes for 3-Way or More Applications			
Cat. No.	DD00R-DL	DD0SR-DL	DD0SR-1
Product	Dual Voltage Matching Dimmer Remote	Dual Voltage Matching Switch Remote	Coordinating Switch Remote
Voltage, Frequency	120/277VAC 60Hz	120/277VAC 60Hz	120VAC, 60Hz
Switch Type	3-Way or up to 5 additional locations	3-Way or up to 5 additional locations	3-Way or up to 9 additional locations

Wiring Diagrams




Cat. No. DDMX1 (Neutral connection required)

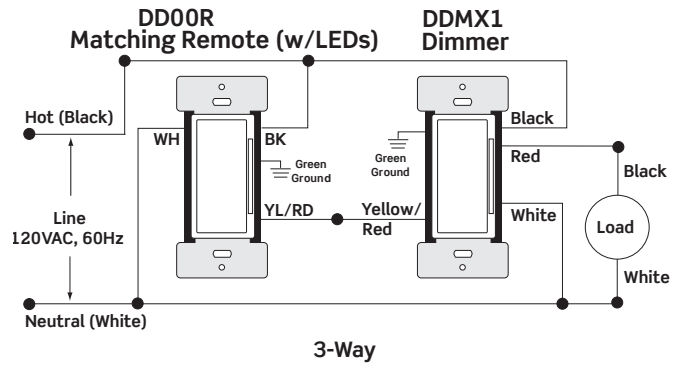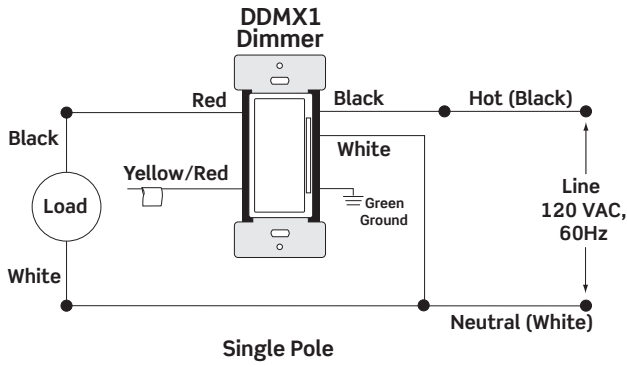


Cat. No. DDL06 (Ground connection required)

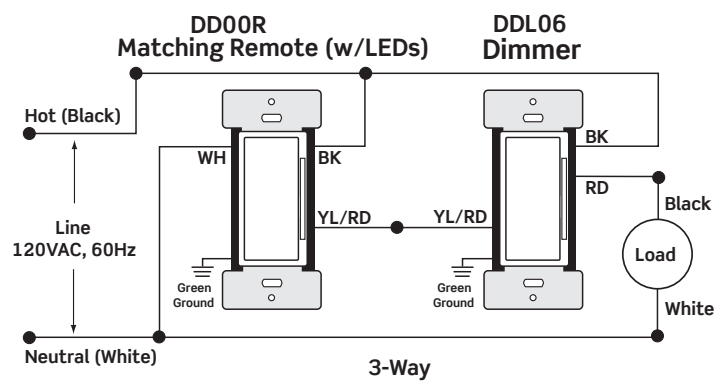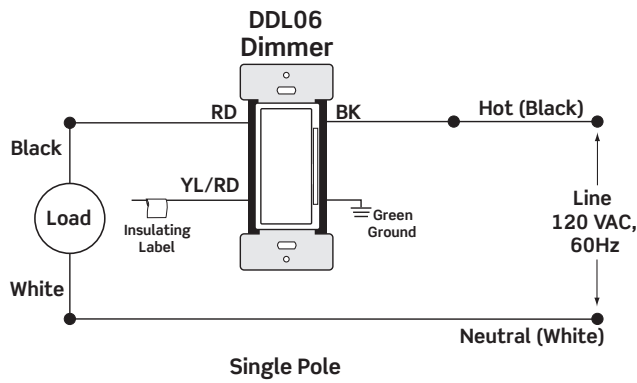



Cat. No. DDS15 (Neutral connection required)

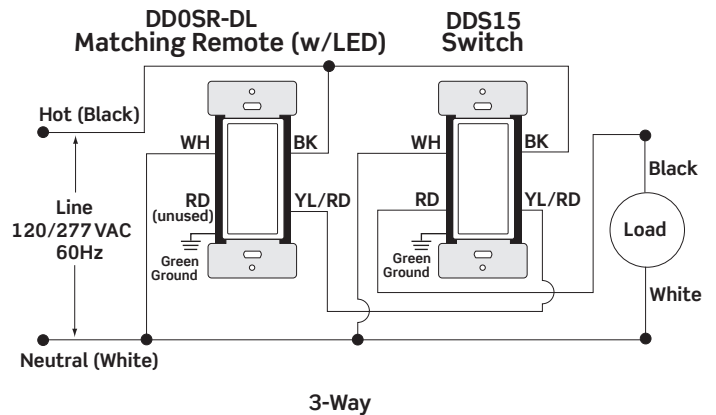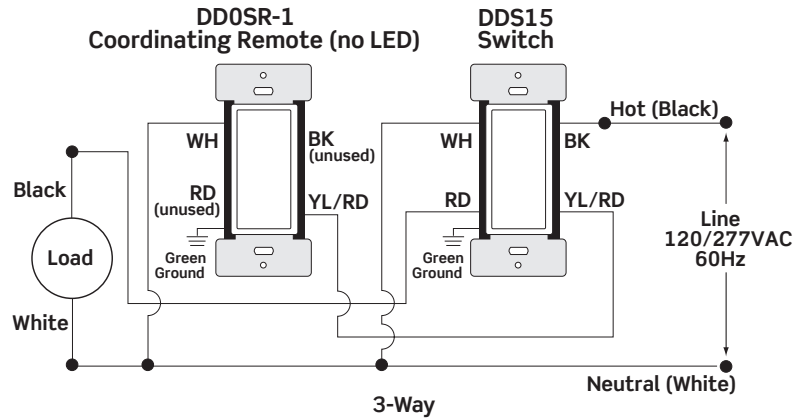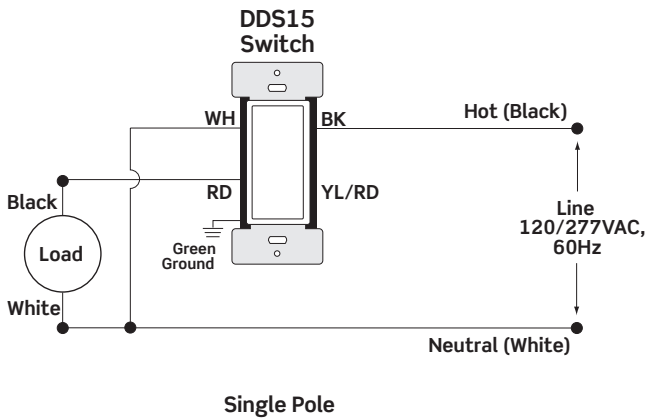


Dimensional Drawings

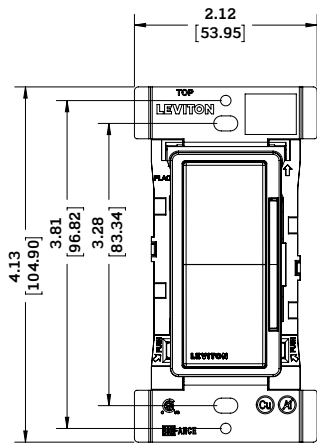

DDMX1

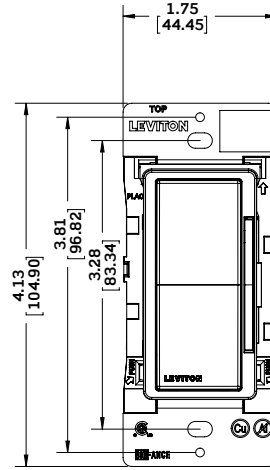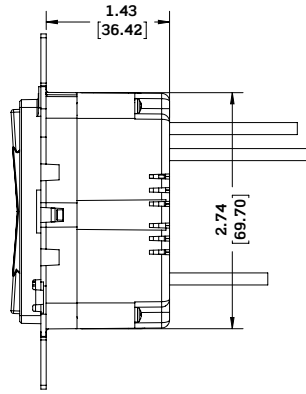

DDL06 (shown), DDS15

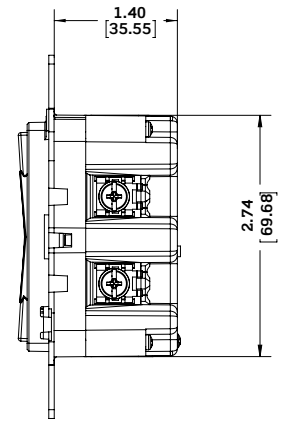

Ordering Information

Cat. No.	Description	Rating	Bluetooth Enabled	Color*
DDMX1-BL	Decora Digital 1000W Dimmer with Bluetooth Technology, Neutral Wire Required	1000W Incandescent/Halogen, 450W LED/CFL, 1000VA Mark 10® Powerline, 1000VA Magnetic, Low Voltage	Yes	Z
DDL06-BL	Decora Digital 600W Dimmer with Bluetooth Technology, Ground Wire Required	600W Incandescent/Halogen, 300W LED/CFL	Yes	Z
DDL06-1L	Decora Digital 600W Dimmer Ground Wire Required	600W Incandescent/Halogen, 300W LED/CFL	No	Z
DDS15-BD	Decora Digital Dual Voltage Switch with Bluetooth Technology, Neutral Wire Required	1800W Incandescent/Halogen, 600W LED/CFL, 15A FL (120V) 6A FL (277V)	Yes	Z
DD00R-DL	Decora Digital Dual Voltage Matching Dimmer Remote, Neutral Wire Required	120/277VAC, 60Hz	No	Z
DD0SR-DL	Decora Digital Dual Voltage Matching Switch Remote, Neutral Wire Required	120/277VAC, 60Hz	No	Z
DD0SR-1	Decora Digital Coordinating Switch Remote, Neutral Wire Required	120VAC, 60Hz	No	Z
DDKIT	Decora Digital Color Change Kits for Dimmers	N/A	No	W, I, T, G, E, B
DDKIT-S	Decora Digital Color Change Kits for Switch	N/A	No	W, I, T, G, E, B

*Decora Digital Controls come packaged with three colors. Products with suffix (-Z) include White, Ivory and Light Almond. Color Change Kits are available in the following colors: White (-W), Ivory (-I), Light Almond (-T), Gray (-G), Black (-E) and Brown (-B).



Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747-3138
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
 Tech Line (8:30AM-7:00PM E.T. Monday-Friday): 1-800-824-3005

Visit our Website at: www.leviton.com/decoradigital

© 2016 Leviton Manufacturing Co., Inc. All rights reserved.
 All trademarks are the property of their respective owners.

Download the Decora Digital Dimmer & Timer App



Available through the App Store and Google Play



App Store, Google Play and the Bluetooth word marks and logos are the registered trademarks of Apple Inc., Google Inc. and Bluetooth SIG, Inc., respectively, and any use of such marks by Leviton is under license. All other third party trademarks are the property of their respective owners.