Simon 1 Light Wall

EW1041 1.0

G E N E R A T I O N   L I G H T I N G

Wall

GENERAL PRODUCT INFORMATION:

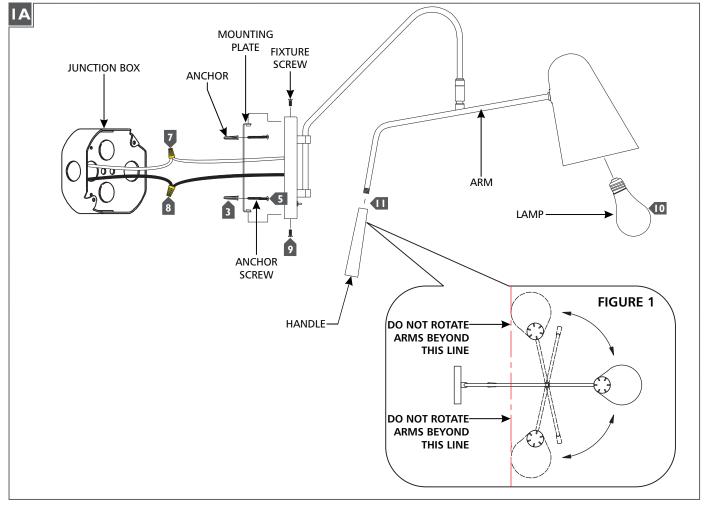These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

FIGURE 1

1   Temporarily install the mounting plate to the junction box.
2   Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
3   Drill appropriate sized holes and install the anchors.
4   Secure the mounting plate to the junction box.
5   Screw the anchor screws into the anchors.
6   Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
7   Connect the white fixture wire to the neutral power line wire with a wire nut.
8   Connect the black fixture wire to the hot power line wire with a wire nut.
9   Mount the fixture onto the mounting plate and secure it in place with the fixture screws.
10 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
11 Install the handle by screwing it onto the arm.
12 Adjust the arm by moving the handle left or right until the desired position is reached. **Make sure to not rotate the arms past the indicated point (see figure 1).**

SAVE THESE INSTRUCTIONS!