# DEFINNT®

**FOR** 





Questions, problems, missing parts? Before returning to the store, call Defiant Customer Service

#### **TOLL FREE HELP LINE 1-877-ONE-LOCK HOMEDEPOT.COM**

08:30 a.m.-05:30 p.m., EST, Monday - Friday



#### WARRANTY

#### LIMITED LIFETIME MECHANICAL AND 1 YEAR ELECTRONIC WARRANTY

Imitation on the duration of implied warranty subject some states do not allow the limitation or incidental damages, so the above limitation or excludable, if any, may not apply to you.

Retailer neither assumes not authorizes any representative or other person to assume for it any obligation or liability other than such as is expressly set forth herein. This limited warranty gives you specific legal rights, and you may also have other rights which varies which varies which varies which varies which varies any to replace, at its option, this product if it will either repair or replace, at its option, this product if it may be defective by reason of improper workmanship or materials within the original purchaser's limited to the original purchaser at retail of this product from retailer.

Except to the extent prohibited by applicable law, no other warranties, whether express or implied, including the warranties of merchantability and fitness for a particular purpose, shall apply to this product. Under no circumstances shall retailer be liable for consequential or incidental damages in connection with this product. To the extent retailer is prohibited by applicable law from excluding implied warranties, the duration of such implied warranties which are not excludable, if any, may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion of incidental or consequential damages may not apply to you.

Retailer neither assumes not authorizes any representative or other person to assume for it any obligation or liability other than such as is expressly set forth herein. This limited warranty gives you specific legal rights, and you may also have other rights which vary from state to state.


### 1 Safety Information

Read the precautions and instructions in this manual before installing and using this lock. Save this manual for future reference.



**CAUTION:** Please use four alkaline batteries for the best performance.

- A. Do not attempt to disassemble any internal components of the lockset. Doing so will void the limited warranty
- B. Do not drop or hit the lockset. Too much shock may result in permanent damage
- C. Do not use pins or sharp objects to press the keypad.
- D. Always create a backup of information you wish to keep (master code, user codes,etc.) Please use the last page of this booklet as a reference. E. Be sure to complete initial settings before operating lockset.



CARE and MAINTENANCE:
The following instructions should be followed to properly protect and maintain your lockset:

- A. Remove locks, or do not install locks, prior to painting your door B. Periodically clean with mild soap and a soft cloth only.
- C. Do not use any abrasives or chemical products containing alcohol, benzene, acids, and avoid using sharp or abrasive objects to clean this lockset.
- D. Do not allow any water or liquids into the lockset during installation


Optional

# Pre-installation - Tools Required / Hardware Included

Optional

If the door needs to be drilled, please be familiar with how to use a drill safely and understand all of the door preparation steps before proceeding. Do not use a drill to assemble this product.

Optional

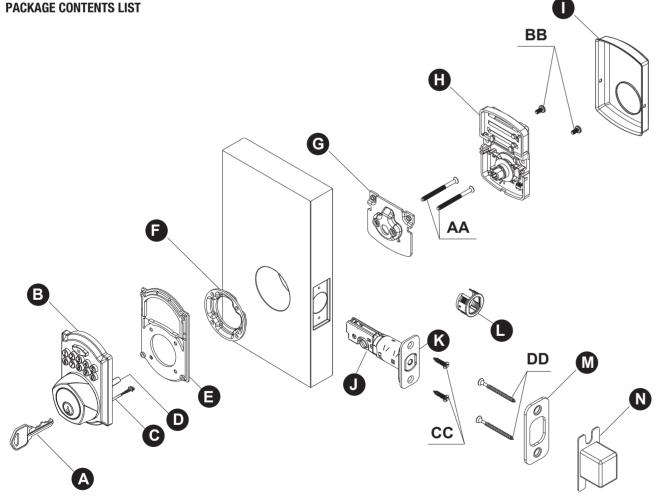

С	Power Cable	
D	Torque Blade	
Е	Exterior Gasket	
F	Adapter collar	


Н	Interior Assembly
1	Battery Cover
J	Latch
K	Radius Faceplate
L	Drive-in Collar (Optional)
M	Strike Plate
N	Dust Box

# **HARDWARE CONTENTS**


G Mounting Plate

A Key

B Exterior Assembly

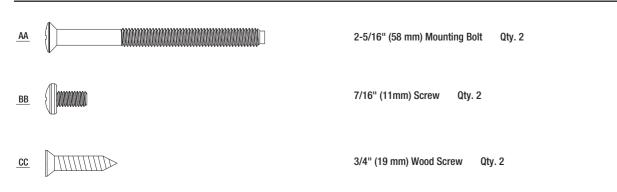

2" (51 mm) Wood screws Qty. 2

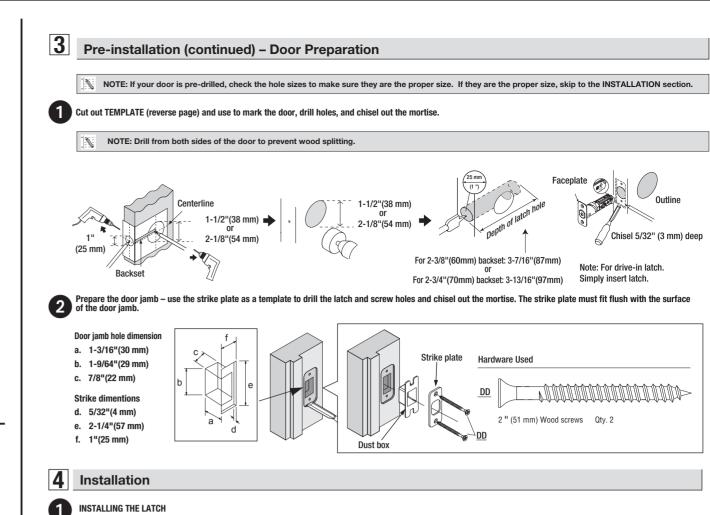


Edge of door

A. Attach the correct faceplate











B. Set the latch backset length


Your latch is set for 2-3/8"(60mm) backset. It can be adjusted if needed to 2-3/4"(70mm) (skip this if your door has a 2-3/8"(60mm) backset).

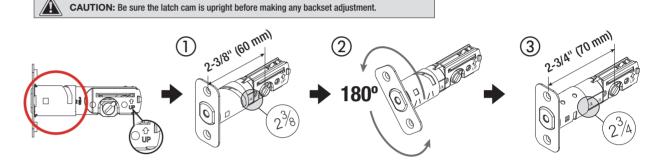

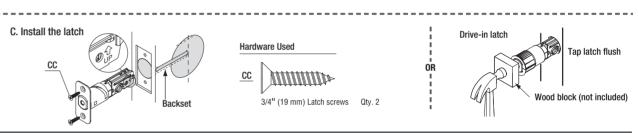

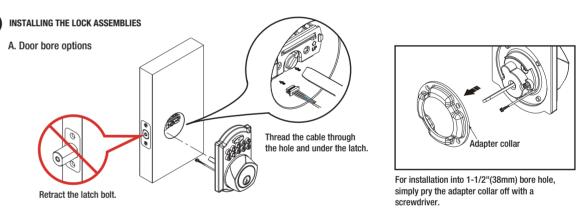

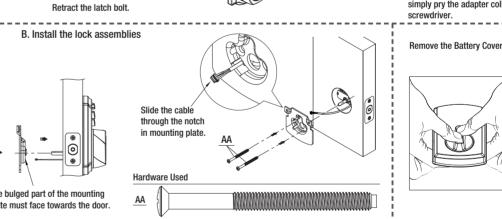

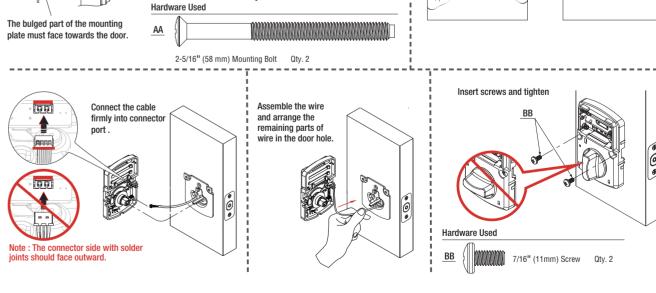




# **CAUTION:**


1.Please use three alkaline batteries for better performance. Be sure to insert them correctly by matching the + and – polarity markings. Do not mix old batteries and new batteries or standard (carbon-zinc) with alkaline batteries.

2.Please activate the lockset by entering the DEFAULT MASTER CODE (123456) to finish installation.


3.Install and test lock with door OPENED to avoid being locked out.

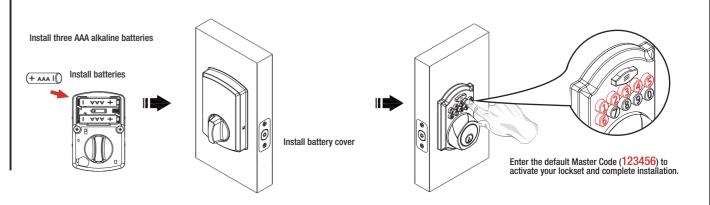

# **OVERVIEW OF THE LOCKSET**

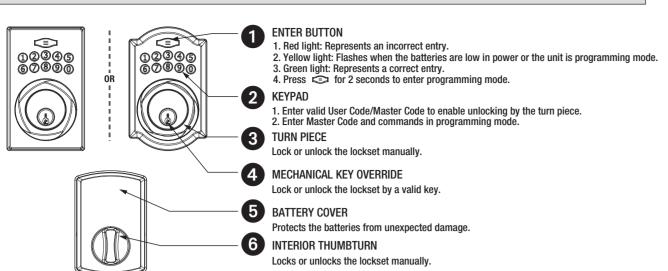

#### **HOW TO LOCK / UNLOCK**

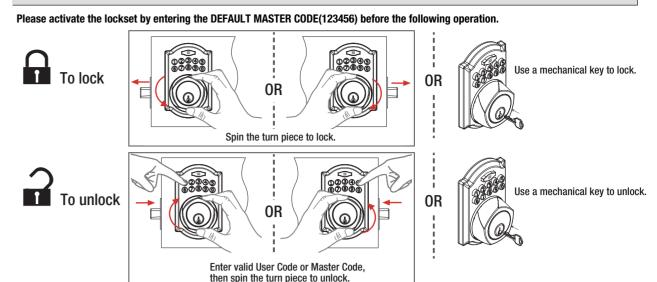

# **PROGRAMMING**



· The lockset will exit the programming mode and resume to the stand-by status if no input is made in 30 seconds. · 3 Beeps mean something was entered incorrectly. Please redo the step again.

#### **BASIC SETTINGS**

Change Master Code	<ul> <li>Master Code can be used to program or unlock the lockset.</li> <li>The default Master Code is "123456".</li> </ul>	Press and hold the button until the unit beeps, then release the button button until the unit beeps, then release the button button
Add a User Code(s)	<ul> <li>User Code can be used to unlock the lockset.</li> <li>User Code capcity: 20 sets (4-8 digits).</li> </ul>	Press and hold the beeps, then release the button button with the unit beeps, then release the button butto
Delete individual User Code(s)	Delete individual User Code(s).	Press and hold the button until the unit beeps, then release the button button until the code then press Press 2 + Unwanted User Code (4-8 digits)
Delete all User Codes	Delete all User Codes.	Press and hold the button until the unit beeps, then release the button button
ADVANCED SETTINGS		
Volume Control	Turn on / off door lock operation volume. Volume is always on in the programming mode.	Press and hold the button until the unit beeps, then release the button button button
Vacation Mode	Disabled by default.     All User Codes will be temporarily disabled when Vacation Mode is enabled.	Enable Vacation Mode  Press and hold the button until the unit beeps, then release the button button until the unit beeps, then release the button


#### **ACCESS CODE LIST**


After changing your Master Code, do not pass your Master Code to

Master Code	
Name	User Code

# **RESTORE TO FACTORY SETTINGS**

This will erase all stored information. The preset Master code is 123456.



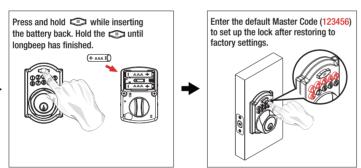

Disable Vacation Mode

Enter the current Master Code to unlock and disable Vacation Mode at the

same time. All stored User Codes are re-activated for access

#### FEDERAL COMMUNICATIONS COMMISSION STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

★ Keypad is temporarily disabled for 1 minute after 4 consecutive incorrect entries.

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help

# IC REGULATIONS

This Class B digital apparatus complies with Canadian ICES-003.

Operation is subject to the following two conditions:


(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

# **TROUBLESHOOTING**



QUESTIONS	ANSWERS
A.The latch/thumb piece does not operate correctly after installation.	Re-install the Lockset  1. Make sure the backset on the latch is set to the proper length.  2. Make sure prior to installation latch bolt is retracted and key is not in lockset when installing the deadbolt.  3. Make sure the thumb piece is vertical.
B. Fail to set up the lock.	<ol> <li>Please make sure the lock is installed correctly.</li> <li>Please install the fresh batteries and make sure the cable is connected correctly.</li> </ol>

QUESTIONS	ANSWERS	
A.The latch/thumb piece does not operate correctly after installation.	Re-install the Lockset  1. Make sure the backset on the latch is set to the proper length.  2. Make sure prior to installation latch bolt is retracted and key is not in lockset when installing the deadbolt.  3. Make sure the thumb piece is vertical.	
B. Fail to set up the lock.	<ol> <li>Please make sure the lock is installed correctly.</li> <li>Please install the fresh batteries and make sure the cable is connected correctly.</li> </ol>	

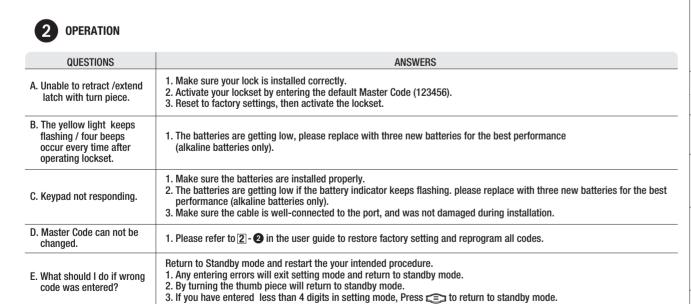

QUESTIONS	ANSWERS
F. Can not delete all User Codes.	Make sure the whole code entering process is completed within 10 seconds, otherwise the unit will time out.     Make sure the Master Code has been entered correctly.
G. Can not add a new User Code.	Make sure the whole code entering process is completed within 10 seconds, otherwise the unit will time out.     Make sure the Master Code has been entered correctly.     The new User Code will not be accepted when the capacity is full. Try to delete any or some existing User Codes and then add new one(s) again. A User Code must be at least 4 to 8 digits.
H. Lockset is not able to unlock by keypad.	1. Make sure you have entered the correct User Code. 2. The battery is low if the battery indicator light keeps flashing.Please replace with three new batteries. 3. Make sure the cable is firmly connected. 4. Check the cable for any damage that may have occurred during installation. 5. Make sure the batteries are properly installed. Use alkaline batteries only. 6. Check the strike plate to make sure it is properly aligned and clear so the bolt can freely move in the hole.
I. Lockset is unable to reset.	<ol> <li>Please refer to 2 - 2 in the user guide to restore factory settings and reprogram all codes.</li> <li>The battery is low if the battery indicator light keeps flashing. Please replace with three new batteries.</li> </ol>
J. How to operate the lockset in darkness?	Press any button to activate the lockset back light.
K. The red indicator is still on after setting is completed.	<ol> <li>Check if is jammed.</li> <li>Re-install the batteries.</li> </ol>
L. I cannot remove my key unless it is in the locked position.	1. Un-install the interior and exterior assemblies. Before re-installation, please follow these guidelines: 1) Make sure the bolt is in the retracted position. 2) Do not have any key in lock cylinder. 3) Make sure the torque blade is inserted correctly.
If the lock appears to be damaged or does not operate properly, please contact customer service for further assistance.	

