



Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination for outdoor spaces in residential and light commercial applications. Ideal for entryways creating an inviting exterior space as well as providing safety and security.

ATTRIBUTES

This wall light features either a black or white housing with a white acrylic diffuser. Dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings.

Includes (1) 13W compact spiral 2700K fluorescent lamp with integrated 120V 60Hz electronic GU24-pin base ballast (ensures no flickering and quiet operation without interfering with other home electronics) for energy efficiency, superior color rendering and long life (average 10,000 hours).

Starts instantly down to 0°F (-18°C).

For use with non-dimmable switches only.

All mounting hardware included.

LISTING

CUL listed to US and Canadian safety standards and suitable for wet locations. ENERGY STAR® qualified.


WARRANTY

Guaranteed for two years against mechanical defects in manufacture. (excludes lamp)

Outdoor General Purpose

Cylinder Wall Light


Compact Integrated Spiral Fluorescent

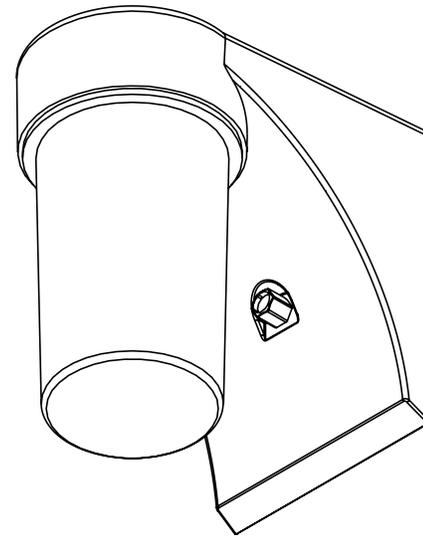

DIMENSIONS

All dimensions are in inches (centimeters)

Model No.	Number of Lamps	(A) Length Inches (cm)	(B) Width Inches (cm)	(C) Height Inches (cm)
OSC	1	6-1/2" (16.5)	4-1/2" (11.4)	8" (20.3)

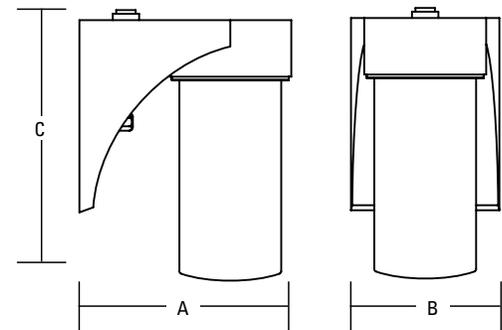

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Example: **OSC 13F 120 P LP BL**

OSC 13F		120	P	LP	
Model Number		Ballast/Voltage	Features	Lamp	Finish
OSC 13F	(1) 13W compact spiral 2700K fluorescent lamp w/integrated electronic 120V 60Hz GU24-pin base ballast Included.	120 120 volt residential electronic ballast (standard)	P Dusk-to-Dawn photocell	LP Lamp included	BL Black WH White

Accessories/Replacement Parts

CF13INLB27 GU24	13W compact spiral 2700K fluorescent lamp w/integrated electronic 120V 60Hz GU24-pin base ballast
------------------------	---

Cylinder Wall Light Outdoor General Purpose

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

