



**cellofoam<sup>®</sup>**

**permafloa<sup>®</sup>**

**DOCK FLOTATION**

## **Cellofoam's PERMAFLOAT<sup>®</sup> Dock Flotation**

**PERMAFLOAT<sup>®</sup> Float Drums** offer durable flotation that can be easily attached to any new or existing wood, steel or aluminum dock system.



**PERMAFLOAT<sup>®</sup> Float Drums** are rotationally molded, eliminating seams that can result in separation and leakage. The nominal .150" thick shell is made of prime virgin polyethylene with ultraviolet inhibitors. This tough shell withstands damage from the sun, saltwater, fresh water, debris, gas and marine organisms. Suitable for Residential and Commercial applications.



### *Quick Facts*

- Easy to install
- Highly cost effective compared to concrete systems
- Extra wide ribbing provides easier tool access
- Available in a variety of sizes to meet your specific needs
- Seamless rotationally molded polyethylene shell
- Industry Leading 15 Year Warranty
- FLASH DOT<sup>®</sup> reflector takes guesswork out of night docking
- EPS Foam Filled
- ACOE Approved
- Tank Tested Buoyancy Ratings +0/-5%



Copyright 2018 Cellofoam North America Inc.  
All rights reserved.



Please contact your  
**Cellofoam PERMAFLOAT**  
**Dock Flotation Specialist**  
for the most accurate assessment  
of your Dock Flotation needs.

**800-531-4734**



**Our full line of float specifications are available online at [www.cellofoam.com](http://www.cellofoam.com)**



cellofoam®



**2 FOOT SERIES**

Part #	Dimensions	Weight (lb)	Buoyancy (lb)
RP2312	24" x 36" x 12"	21	332
RP2316	24" x 36" x 16"	25	446
RP2320	24" x 36" x 20"	28	537
RP2408	24" x 48" x 8"	22	288
RP2412	24" x 48" x 12"	27	454
RP2416	24" x 48" x 16"	32	598
RP2418	24" x 48" x 18"	34	652
RP2420	24" x 48" x 20"	36	731
RP2424	24" x 48" x 24"	41	882

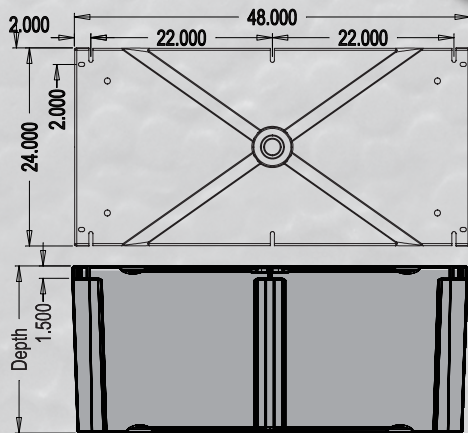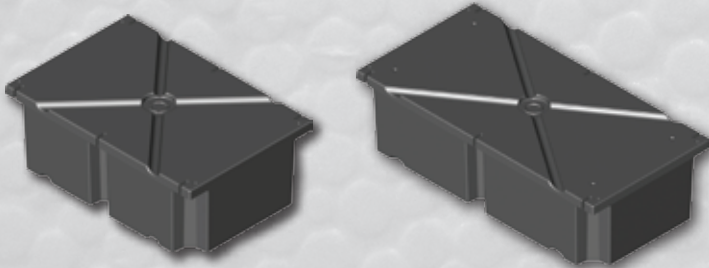

**3 FOOT SERIES**


Part #	Dimensions	Weight (lb)	Buoyancy (lb)
RP3408	36" x 48" x 8"	32	472
RP3412	36" x 48" x 12"	38	700
RP3416	36" x 48" x 16"	44	925
RP3420	36" x 48" x 20"	50	1132
RP3424	36" x 48" x 24"	57	1364
RP3612	36" x 72" x 12"	55	1061
RP3616	36" x 72" x 16"	64	1402
RP3620	36" x 72" x 20"	72	1718
RP3624	36" x 72" x 24"	82	2072
RP3632	36" x 72" x 32"	105	2678
RP3812	36" x 96" x 12"	73	1412
RP3816	36" x 96" x 16"	85	1870
RP3820	36" x 96" x 20"	95	2295
RP3824	36" x 96" x 24"	108	2771

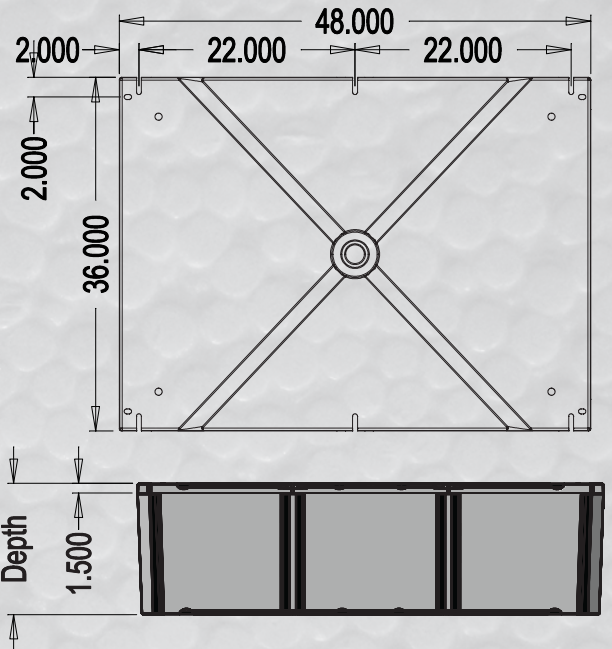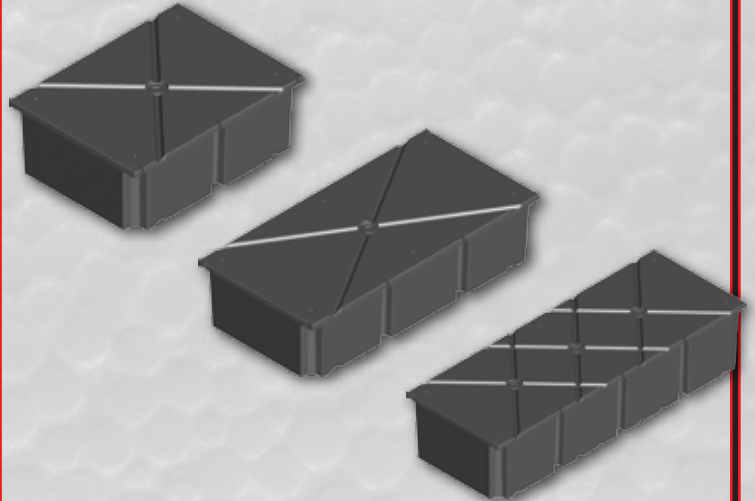

**ADDITIONAL FLOAT SIZES & STYLES**

Part #	Dimensions	Weight (lb)	Buoyancy (lb)
*RP20728	20" x 72" x 8"	26	356
*RP207210	20" x 72" x 10"	29	443
RP2810	20" x 96" x 10"	39	598
RP1412	12" x 48" x 12"	16	207
RP1420	12" x 48" x 20"	22	334
RP3.5616	42" x 72" x 16"	74	1636

\*Rowing dock floats

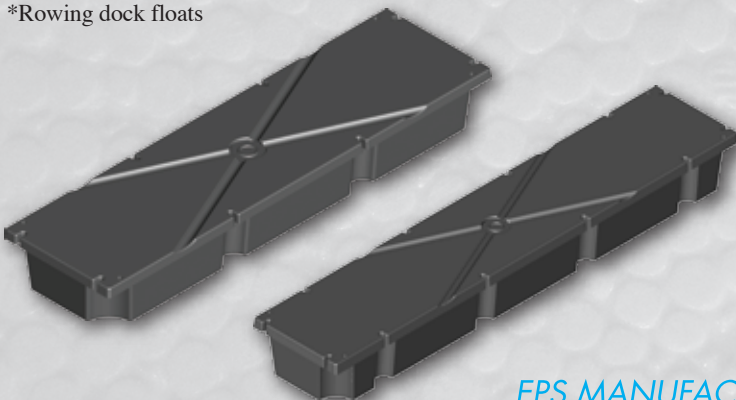



EPS MANUFACTURER SINCE 1966



**cellofoam®**


### 4 FOOT SERIES

Part #	Dimensions	Weight (lb)	Buoyancy (lb)
RP4412	48" x 48" x 12"	49	940
RP4416	48" x 48" x 16"	57	1242
RP4420	48" x 48" x 20"	64	1522
RP4424	48" x 48" x 24"	73	1836
RP4512	48" x 60" x 12"	60	1186
RP4516	48" x 60" x 16"	69	1568
RP4520	48" x 60" x 20"	78	1923
RP4524	48" x 60" x 24"	88	2320
RP4612	48" x 72" x 12"	71	1420
RP4616	48" x 72" x 16"	82	1880
RP4620	48" x 72" x 20"	93	2307
RP4624	48" x 72" x 24"	105	2786
RP4632	48" x 72" x 32"	131	3648
RP4812	48" x 96" x 12"	94	1900
RP4816	48" x 96" x 16"	108	2518
RP4820	48" x 96" x 20"	122	3092
RP4824	48" x 96" x 24"	137	3737
RP4832	48" x 96" x 32"	167	4920

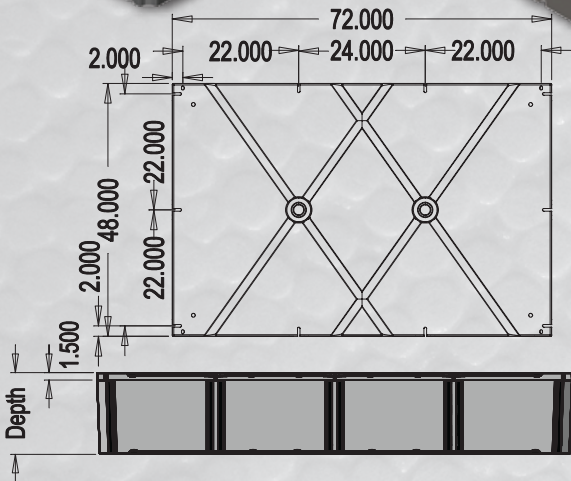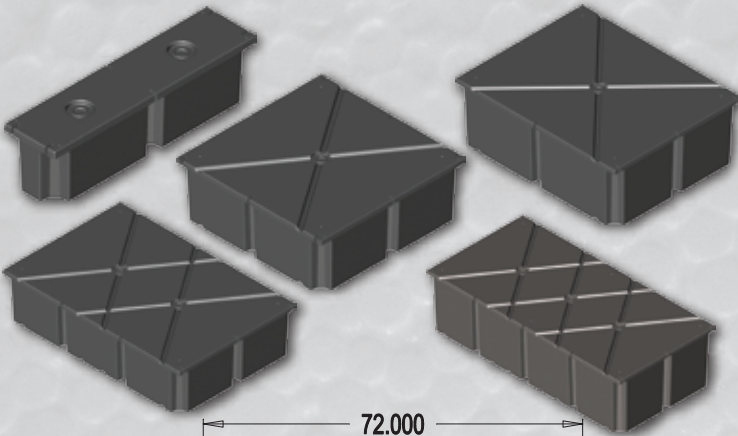

*All dimensions are nominal subject to manufacturing tolerances. Top view typical of all 48" x 96" floats with the exception of the 32" deep model.*



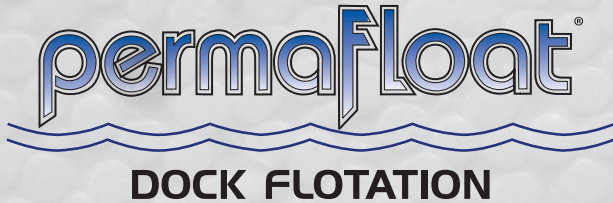

## 15 YEAR WARRANTY

### Permafloat® 15 YEAR WARRANTY

EFFECTIVE 6/1/2008  
NEW STYLE (08) PERMAFLOAT ONLY

Cellofoam North America Inc (“Manufacturer”) warrants our encapsulated flotation, to the original owner (“Purchaser”), against cracking, peeling, sloughing, and excessive deterioration from ultraviolet rays while retaining resiliency under normal usage for a period of 15 years. The first 11 years are non-prorated. Years 12, 13, 14 and 15 are prorated at 40%, 30%, 20% and 10% of the original purchase price respectively. Defects in workmanship are warranted for a period of 1 year.

Purchaser’s remedy is expressly limited to repair or replacement of the defective encapsulated flotation. Determination of a product defect is solely at Manufacturer’s decision. At Manufacturer’s election we will repair, replace or credit Purchaser with an amount not to exceed the original purchase price or portion thereof based on the above scale of prorated coverage. Purchaser shall, within 10 days of discovery, send written notification and the original proof of purchase, to Manufacturer by registered or certified mail of any claim under this warranty. Purchaser will provide Manufacturer with an opportunity to inspect the encapsulated flotation as necessary by returning prepaid to Manufacturer’s Conyers, GA plant. In no event shall Manufacturer be liable for any defective encapsulated flotation should examination reveal misuse, negligence, alteration, ice damage, accident, improper installation, overloading, maintenance, repair or acts of God.

Manufacturer makes no representation or warranty of any other kind, expressed or implied with respect to the product(s) sold hereunder as to merchantability, fitness for any purpose, or legality of use in any jurisdiction. Manufacturer shall not be liable for any loss of use, cost, fees or any liability for direct, indirect or consequential damages or delays. No other person, firm or corporation can bind Seller to any warranty other than herein above stated.

The laws of the State of Georgia shall govern this limited warranty.

Rev.10/17/13



**cellofoam®**

**CONYERS, GA**  
1961 Rockdale Industrial Blvd. 30012  
(800) 531-4734  
FAX (770) 860-1712

For orders and customer  
service requests, contact us at  
**800-531-7434**  
floats@cellofoamna.com

**SALLISAW, OK**  
400 E. Houser Ave. 74955  
(800) 864-1518  
FAX (918) 775-7750

[www.cellofoam.com](http://www.cellofoam.com)