


DANGER - FLAMMABLE GAS UNDER PRESSURE • LEAKING LP-GAS MAY CAUSE A FIRE OR EXPLOSION IF IGNITED
• CONTACT LP-GAS SUPPLIER FOR REPAIRS OR DISPOSAL OF THIS CYLINDER OR UNUSED LP-GAS
• FOR OUTDOOR USE ONLY* • DO NOT USE OR STORE CYLINDER IN A BUILDING, GARAGE OR ENCLOSED AREA

CUSTOMER WARNING:

- Know the odor of LP-Gas. If you hear, see or smell leaking LP-Gas, immediately get everyone away from the cylinder and call the Fire Department. Do not attempt repairs.
- Caution your LP-Gas supplier to:
 - Be certain cylinder is purged of trapped air prior to first filling.
 - Be certain not to overfill the cylinder.
 - Be certain cylinder requalification date is checked.
- LP-Gas is heavier than air and may settle in low places while dissipating.
- Contact with the liquid contents of cylinder will cause freeze burns to the skin.
- Do not allow children to tamper or play with cylinder.
- When not connected for use, keep cylinder valve turned off. Self contained outdoor cooking appliances shall be limited to a cylinder of 20 lb. Capacity or less.
- Do not use, store or transport cylinder where it would be exposed to high temperatures. Relief valve may open allowing a large amount of flammable gas to escape.
- When transporting, keep cylinder secured in an upright position with cylinder valve turned off.

WHEN CONNECTING FOR USE:

- Use only in compliance with applicable codes.
- Read and follow manufacturers' instructions.
- Consult manufacturers' instructions concerning the cylinder connection provided with your appliance.
- Be sure regulator vent is not pointing up.
- Turn off all valves on the appliance.
- Do not check for gas leaks with a match or open flame. Apply soapy water at areas marked "X". Open cylinder valve. If bubble appears, close valve and have LP-Gas service person make needed repairs. Also check appliance valves and connections to make sure they do not leak before lighting appliance.
- Light appliance(s) following manufacturers' instructions.
- When appliance is not in use, keep the cylinder valve closed.

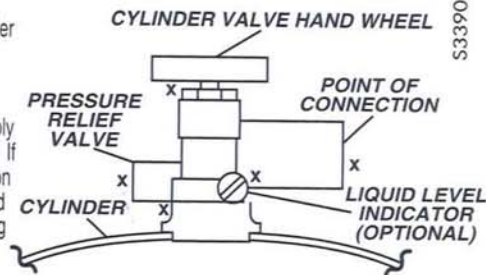

S33901 Rev. B

DO NOT REMOVE, DEFACE OR OBLITERATE THIS LABEL I *EXCEPT AS AUTHORIZED BY ANSI/NFPA 58 or CAN/CGA-B149.2

NEVER store a spare LP cylinder under or near a barbecue grill, NEVER fill an LP cylinder beyond 80% full: a fire causing death or serious injury may occur.

PROP 65 WARNING: Handling the brass material on this product exposes you to lead, a chemical known to the State of California to cause [cancer, and] birth defects or other reproductive harm.

Wash your hands after handling this product