merican tandard

### CHAMPION® 4 HET RIGHT HEIGHT® ELONGATED TOILET VITREOUS CHINA

**BARRIER FREE** 

#### CHAMPION® 4 HET RIGHT HEIGHT® ELONGATED TOILET

#### **241AA.104**

- Features Champion® Flushing System
- Vitreous china
- High Efficiency Toilet (HET), ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water
- Meets EPA WaterSense<sup>®</sup> Criteria
- PowerWash® rim scrubs bowl with each flush
- Includes color match bowl caps
- EverClean<sup>®</sup> Surface included
- 4" piston-action Accelerator™ flush valve
- 2-3/8" trapway
- 16-1/2" rim height for accessible applications
- 12" (305mm) rough-in
- Generous 9" x 8" water surface area
- Chrome finish trip lever is supplied
- 1,000g MaP Score\*\* at 1.28gpf
- 10 year warranty

# 3395A.001 Right Height<sup>®</sup> Elongated Bowl 4149A.104 Tank

#### **Nominal Dimensions:**


768 x 457 x 792mm (30-1/4" x 18" x 31-3/16")

Fixture only, seat and supply sold separately

# Compliance Certifications -

- Meets or Exceeds the Following Specifications: • ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs



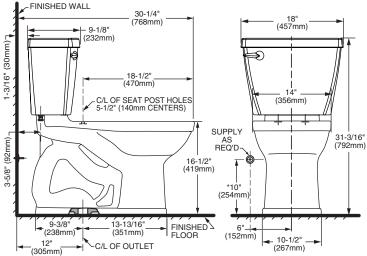

#### NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

\*\* Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.

#### To Be Specified:

- □ Color: □ White □ Bone □ Linen □ Black
- □ Seat: #5325.010 Elongated Champion<sup>®</sup> Slow Close
- solid plastic seat and cover
- □ Supply with stop:



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



FPA

IAPMO R&1



FFICIENT

American Standard

Style That Works Better

### **CHAMPION®4 RIGHT HEIGHT™ ELONGATED TOILET** VITREOUS CHINA

### CHAMPION<sup>®</sup> 4 RIGHT HEIGHT™ **ELONGATED TOILET**

#### 2002.014

- Vitreous china
- EverClean<sup>®</sup> surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Low-consumption (6.0 Lpf/1.6 gpf)
- Features Champion® 4 Flushing System performance platform
- 4" non-adjustable, piston action Accelerator™ flush valve
- 16-1/2" rim height for accessible applications
- · Elongated siphon action jetted bowl
- 2-3/8" fully-glazed trapway
- Speed Connect<sup>®</sup> tank/bowl coupling system
- Chrome-plated trip lever
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- 10 year warranty

3225.016 Bowl

**4266.014** Tank

#### **Nominal Dimensions:**

772 x 464 x 825mm (30-3/8" x 18-1/4" x 32-1/2")

Fixture only, seat and supply by others

#### Alternate Tank Configurations Available:

- 4266.504 Tank complete with Aguaguard Liner
- **4266.604** Tank complete with tank cover locking device
- **4266.704** Tank complete with Aquaguard Liner and tank cover locking device
- 4266.804 Tank complete with trip lever located on right side
- 4266.904 Tank complete with tank cover locking device and trip lever located on right side
- **4266.954** Tank complete with Aquaguard Liner, tank cover locking device, and trip lever on right side

#### **Compliance Certifications -**Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures -
- includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions Los Angeles Department of Water and Power
- Supplementary Purchase Specification for Non-Adjustability - July, 2003 revision

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



#### SEE REVERSE FOR ADDITIONAL ROUGHING-IN DIMENSIONS



#### To Be Specified:

- Color:
  - □ White □ Bone □ Silver □ Linen □ Black
- Design Matched Seat: #5280.016
- Alternate Seats:
  - □ Champion<sup>®</sup> Slow Close Elongated #5325.010
  - □ Rise & Shine Elongated #5324.019
  - □ Rise & Shine Elongated-Open Front #5325.024
  - LeverClean<sup>®</sup> Elongated Seat with Slow Close
  - Snap-Off Hinges #5321.110
- □ Supply with stop:

#### NOTES:


THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

American Standard

Style That Works Better

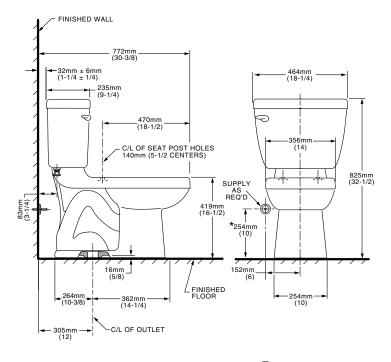



NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

ዋ

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

fmerican tandard

# CHAMPION® SLOW-CLOSE TOILET SEATS


#### CHAMPION® SLOW-CLOSE TOILET SEATS

- □ 5321A.65CT Elongated
- □ 5320B.65CT Round Front
  - Slow-close "No Slam" hinge for user's convenience
  - Unique Easy Lift off feature allows for quick removal and replacement of seat and cover for easy cleaning of toilet without any tools
  - EverClean® Antimicrobial Surface
  - Solid plastic seat with cover
  - Fits most conventional elongated or round front toilets
  - Attractive design coordinates with popular bathroom decor
  - Includes bottom-mounting hardware





SHOWN: CONVENIENT SLOW CLOSE FEATURE



#### SHOWN: UNIQUE EASY LIFT OFF FEATURE




- 1. Installed
- 2. Open the hinge cover
- 3. Pull the seat towards you 4. Remove





# CHAMPION® SLOW-CLOSE TOILET SEATS

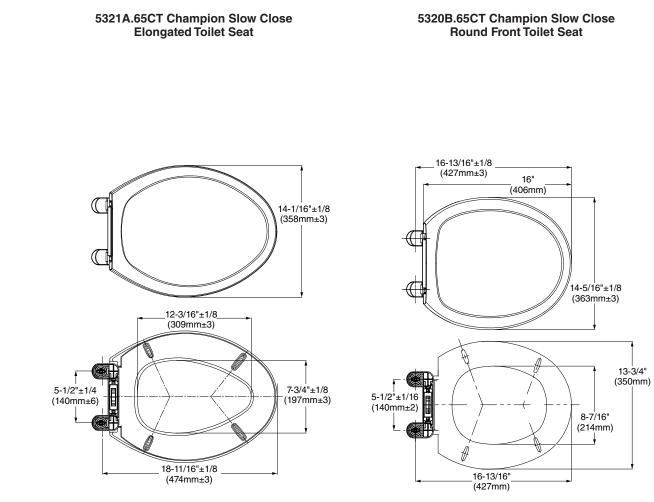

© 2018 AS America Inc.