



**C A F É**  
DISTINCT BY DESIGN

## Replacing Your Café Knobs & Handles



Instrucciones En Español | Instructions En Français:  
[www.cafeappliances.com/kit-instructions](http://www.cafeappliances.com/kit-instructions)

### Instructions for Replacing Appliance Handles

#### IMPORTANT!

- The handle on your appliance may have a different orientation than what is shown, but the installation will be the same.
- Be extra careful of the appliance finish around the handle area, as it can scratch. During removal of the handle screws, hold onto the handle tightly so it won't fall and scratch the appliance. We recommend having another person help you hold the handle in place as you remove the screws.
- When the handle has been removed, check the fasteners that are attached to the appliance front to see if they are loose. If so, tighten them with a 3/16" Allen wrench before attaching the new handle.  
*Note: Fastener shape may vary by appliance.*
- For appliances with multiple handles, look at your current configuration before removing the handles, and make sure the replacement handles match that logo and set screw position.

#### Tools You Will Need:



1/8" Allen Wrench  
(included with handle)



3/16" Allen Wrench  
(not included)



#### I. Removing the Handle

1. Locate the set screws on the handle caps (they are usually on the less visible side).
2. Loosen the set screw on one end with the 1/8" Allen wrench while supporting the handle. Do not remove the set screw from the handle cap.
3. Keep supporting the handle while you loosen the set screw on the other handle cap. Lift the handle from the fasteners on the door and set aside.

#### II. Replacing a New Handle

1. Make sure the set screws are loosened. Place the handle over the fasteners of the door (we recommend putting the screw side of the handle toward the less visible side). Take care to support the handle so it doesn't fall and scratch the appliance finish. Make sure both the handle caps are resting on the face of the door.
2. Lock one end of the handle into position by tightening the set screw in the handle cap with the 1/8" Allen wrench. Be sure not to over tighten.
3. Keep supporting the handle as you lock the other end of the handle into position by tightening the set screw in the handle cap with the 1/8" Allen wrench. Be sure not to over tighten.

Repeat these instructions on all other handles.

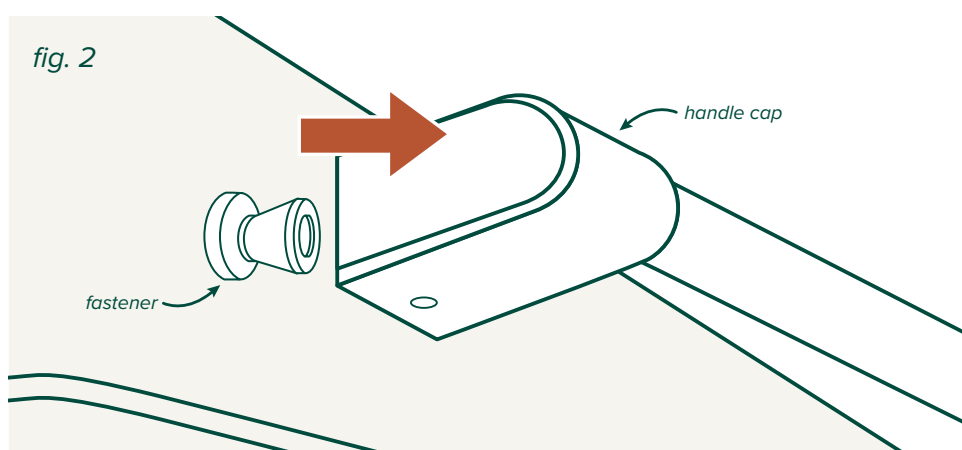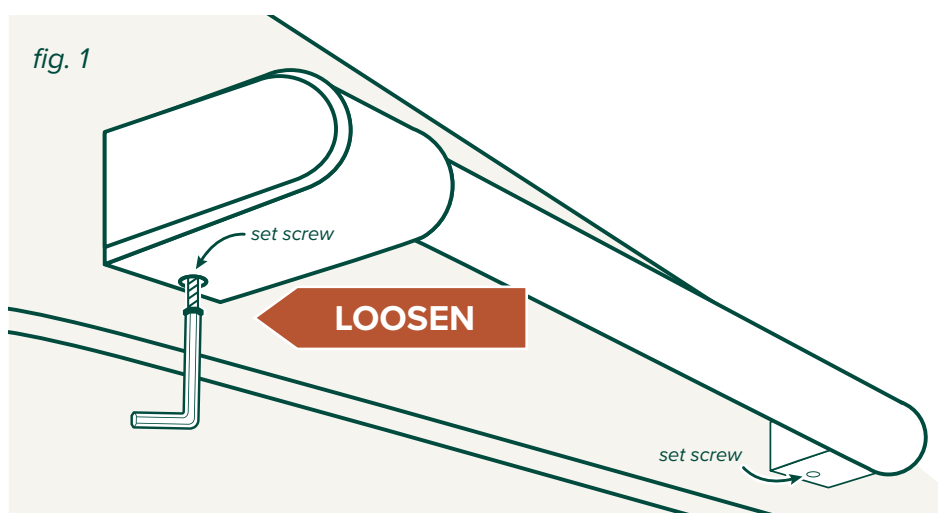


# Instructions for Replacing Knobs

## IMPORTANT!

- Work with one knob at a time to ensure you don't mix up replacement pieces.
- Make sure you check the writing on each of your knobs and set them out in the order you will replace them. This will help ensure you don't put them on in the wrong order.


fig. 1

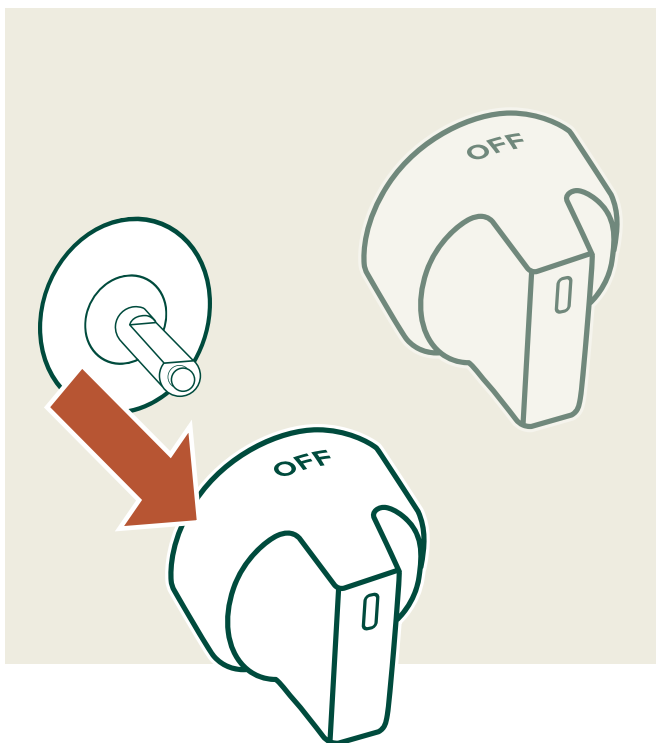

## I. Removing the Current Knob

1. Make sure all knobs are in the OFF position. Note: Microwave oven knob does not have an OFF position.
2. Take note of the OFF position orientation.
3. Choose which knob you will work with first.
4. Remove the knob by grasping the sides and pulling away from the appliance until the knob is free from its shaft. You may have to wiggle it slightly as you pull.

fig. 2

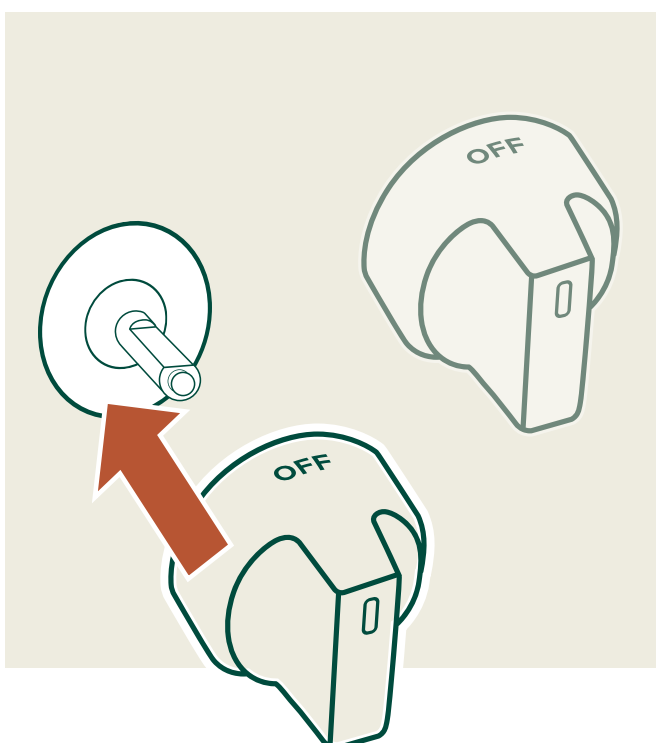

## II. Installing the Replacement Knob

1. Match the replacement knob with the knob you've removed—make sure they have the same writing and markings.
2. Hold the replacement knob so that OFF is at the orientation noted in Section I. Make sure it lines up properly with the shaft.
3. Push the knob onto the shaft as far as possible so it fits snugly.

Repeat the above removal and installation steps for each knob until they have all been removed and replaced.