

INSTALLATION AND OPERATION

CEILING FAN WINK ENABLED REMOTE CONTROL



Questions, problems, missing parts? Before returning to the store, call Customer Service 8 a.m. - 6 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST Saturday 1-855-HD HAMPTON HAMPTONRAY COM

We appreciate the trust and confidence you have placed in Hampton Bay through the purchase of this remote control. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs.

Thank you for choosing Hampton Bay!

Installation (continued)

Miring the receiver to the household wiring

WARNING: To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. If you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.

WARNING: Each wire not supplied with this fan is designed to accept up to one 12-gauge house wire and two wires from the fan. If you have larger than 12-gauge house wiring or more than one house wire to connect to the fan wiring, consult an electrician for the proper size wire nuts to use.

IMPORTANT: Use the wire connecting nuts (AA) supplied with your fan. Secure the connectors with electrical tape and ensure there are no loose strands or connections.

Spread the wires apart so that the green and white wires are on one side of the outlet box and the black wire is on the other side. Connect the green fan wires to the household ground wire (this may be a green or bare wire) using a wire connecting nut (AA). Connect the receiver black (or red) wire to the household black (hot) wire using a wire connecting nut (AA).

Connect the receiver white wire to the household white wire (neutral) wire using a wire connecting nut (AA). Secure each wire connecting nut using electrical tape.


5 Wiring the fan to the receiver



using a wire connecting nut (AA). Connect the fan motor black wire to the receiver black wire using a wire connecting nut (AA) Connect the fan motor blue wire to the receiver blue wire

Connect the fan motor white wire to the receiver white wire

using a wire connecting nut (AA). Secure each wire connecting nut using electrical tape. Turn the wire connecting nut (AA) upward and push the wiring



▲_C (x3)

(or Red) White

Antenna

Black

Black

Safety Information

WARNING: To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. If you feel you do not have nough electrical wiring experience, contact a licensed electrician.

CAUTION: Incorrect wire connections will damage this receiver.

CAUTION: To reduce the risk of fire or injury, do not use this product in conjunction with any variable (rheostat) wall control.

NOTE: The battery will weaken with age and should be replaced before leaking takes place as this will damage the hand unit. Dispose of the used battery properly, keep the battery out of the reach of children.

- YOU MUST SET CEILING FAN TO HIGH SPEED AND LIGHT KIT (IF ANY) TO ON POSITION BEFORE OPERATING REMOTE CONTROL
- The supply to the remote control receiver should be connected through a mains switch, i.e. existing
- Disconnect from power supply at wall switch before working on remote control receiver or ceiling fan. Install receiver into the ceiling fan canopy of the fan to ensure proper protection
- This unit is to be used for the control of ceiling fan and in a AC110/120V 60Hz power supply only. Do not install in damp locations or immerse in water. (For indoor use only.)
- Do not pull on or cut leads shorter.
- Do not drop or bump the unit.
- Do not mix old and new batteries.
- 10. Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc.) batteries.

Warranty

The supplier warrants the remote control and receiver to be free from defects in workmanship and material present at time of shipment from the factory for a period of one year after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned. To obtain warranty service, you must present a copy of the receipt as proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part such as by accident or misuse or improper installation or by affixing any accessories, is not covered by this warranty. Servicing performed by unauthorized persons shall render the warranty invalid. There is no other express warranty. Home Depot hereby disclaims any and all warranties, including but not limited to those of merchantability and fitness for a particular purpose to the extent permitted by law. The duration of any implied warranty which cannot be disclaimed is limited to the time period as specified in the express warranty. Some states do not allow a limitation on how long an implied warranty lasts, so the above limitation may not apply to you. The retailer shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives specific legal rights, and you may also have other rights which vary from state to state. This warranty supersedes all prior warranties. Shipping costs for any return of product as part of a claim on the

Contact the Customer Service Team at 1-855-HD HAMPTON or visit www.HAMPTONBAY.COM

Operating Your Remote Control

Operating the remote control

-Press and release the **b**utton to turn the fan on or off.

Press and hold the button for 3 seconds to use the "walk away" time delay"; this will activate the light for 30 seconds (if you are using dimmable bulbs the light will be activated at 50% brightness.

🍌 - Fan Speed - LED's on the fan speed button will illuminate to the corresponding speed.

- •••• Press button once turns the fan on high speed.
- •••o- Press button twice turns the fan on medium-high speed.
- ••oo- Press button three times turns the fan on medium-low speed. •ooo- Press button four times - turns the fan on low speed.
- Press button five times fan will turn off.

> Light 0N/0FF

Press and release the we button to turn the light on or off. If you are using dimmable bulbs and you have previously set the dip switch in your remote control to the "D" position, press and hold the Substitute the dimmer function.

≈- Comfort Breeze[™] - Press and release the ≉button to enable Comfort Breeze™: this will change your fan speed randomly, simulating a relaxing breeze. To cancel this feature press 🔈 or 😃


C - Timer

• While the fan is on press button once - turns on a 2 hour run timer. (NA) - While the fan is on press button twice - turns on a 4 hour run timer. • While the fan is on press button three times - turns on a 8 hour run timer.

O 沗 * (9)

Downloading the WINK **Application**

Using your smart device, navigate to the Play). Download the free WINK app and



2 Connecting to the WINK Hub Ensure your WINK Hub is connected to WiFi by confirming the indicator light is a solid blue color

Choose the WINK Hub and follow the



When instructed, turn on your fan, Once pairing is successful.



NOTE: If using a dimmer with these lights, set dimmer at highest setting for best results.

on for 3 seconds. Repeat these steps 5 times. The light will failed, please reset the device to original setting and re-start the pairing.

- During set up, the customer is asked if the fan has a light kit.
- If your fan has a light, select "Fan Light On."
- Light Off." Press SAVE to confirm.


Pre-Installation

TOOLS REQUIRED





PACKAGE CONTENTS

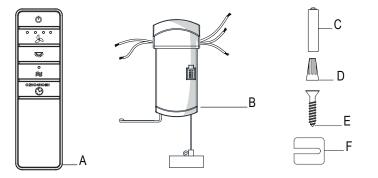




Part	Description	Quantity
Α	Remote control	1
В	Receiver	1
С	AAA 1.5V battery	2
D	Plastic wire connector	5
E	White painting screw	1
F	Rubber isolated pad	2

Operating Fan with the WINK App

application store (Apple App Store or Google create an account.



With the app open, select "add a product,"

instructions on the app to add your fan. NOTE: Be sure your WINK Hub is plugger in and within range of your fan. Refer to



CEILING FAN

SUCCESSI

NEXT

3 Pairing the Fan to the WINK Hub

the fan will turn on at low speed and the light will blink 5 times



NOTE: Reset your fan if the pairing is taking longer than expected. Turn off your fan for 3 seconds, then turn it back blink 3 times when factory reset is successful. If the pairing

Fan Light Settings

- . If your fan does not have a light, select "Fan

Installation

Setting the codes on the remote control and receiver

NOTE: The frequencies on your receiver and hand unit have been preset at the factory. Before installing the receiver, make sure the dip switches on the receiver and hand unit are set to the same frequency. The dip switches on the hand unit are located inside the battery compartment.

NOTE: The battery will weaken with age and should be replaced before leaking a takes place as this will damage the hand unit. Dispose of the used battery properly, keep the battery out of the reach of children.

NOTE: It is imperative that the code used for both transmitter and receiver is exactly the same, otherwise remote controller will not work.

Setting the Code on the Remote


Remove the battery cover on the back of the remote control by pressing firmly on the arrow and sliding the cover off. Slide the code switches to your choice of either up or down. The factory setting is up.

For fans with dimmable bulbs, slide the "Light Function" switch (O/D) to the position marked "D". If you are using non dimmable bulbs slide the "Light Function" switch to the "O" position. Install two 1.5V AAA batteries (included).

Replace the battery cover on the remote

Setting the Code on the Receiver

Slide the code switches on the receiver to the same positions as set on the remote



Control the Fan with the WINK App

⚠ Operating Your Remote Control

Fan Speed

- OFF -Turns fan off
- 1-Turns the fan to Low speed.
- Turns the fan to Medium speed. Turns the fan to Medium 2 speed. • 3-
- Turns the fan to High speed. BREEZE- Randomly alternates fan speeds to create an organic breeze effect.


Fan Light

• OFF/ON - Turns fan light off or on. Select and slide to dim or brighten light.

When on "fan control screen," press settings button to in upper right corner to display the settings panel. · Select fan to display control panel.

- Scroll down the control panel and select "Set . Scroll through the hours and minute columns to select the duration of the timer.
- Press OK to start the timer.






Installation (continued)

2 Installing the rubber isolated pads

Loosen the two screws provided with the outlet box; insert two rubber isolated pads (F) between the mounting bracket and the outlet box; firmly tightened the two screws.



- Receiver antenna

(Leave connected and do not cut)

3 Installing the receiver

WARNING: To reduce the risk of fire or electric shock, remember to disconnect power. The electrical wiring must meet all local and national electrical code requirements. The electrical source and fan must be 110/120 volt 60Hz. Do not use this product in conjunction with any variable wall control. Incorrect wire connection can damage this receiver.



CAUTION: If fan or house wires are a different color, have this unit installed by a licensed

immerse in water (For indoor use only). Do




not pull on or cut lèads shorter. Do not drop or bump the unit. NOTE: The ceiling fan must be set at HIGH NOTE: The ceiling ran must be set at nium speed and light kit (if installed) should be set to



NOTE: For better performance with the WINK system, the T-Shaped antenna stick should be mounted to the ceiling outside of the fan's ceiling canopy using the pre-mounted double-stick tape and wood screw (included).

of the slide-on mounting bracket; position the fan wires (BBB) to the opposite side. Insert the narrow end of the receiver (as shown, flat side towards the ceiling) into the slide-on mounting

bracket until it rests on top of the ball/downrod assembly. The canopy comes up to cover the receiver and bracket.

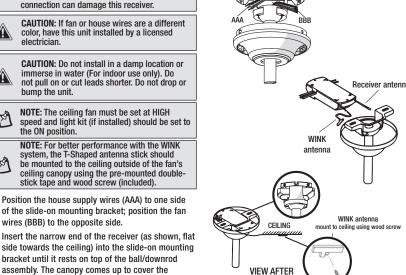

INSTALLATION



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment. FCC ID: KUJCE10406, KUJCE10407


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operatio





USE AND CARE GUIDE

HOLLY SPRINGS 52-INCH CEILING FAN

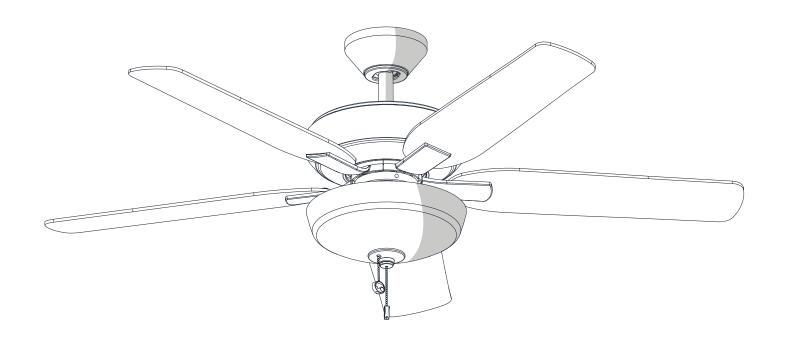

Questions, problems, missing parts? Before returning to the store, call Hampton Bay Customer Service 8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-HAMPTON

HAMPTONBAY.COM



To view an instructional video on how to install this product:

- 1. Go to www.homedepot.com and enter either the Item or Model number, found in the top right corner of the cover of this instruction manual, in the search field.
- 2. Click on your product from the list of search results and click on the video link in the "Product Overview" section.

THANK YOU

Table of Contents

Table of Contents2	Assembly	7
Safety Information2	Operation	. 14
Warranty3	Care and Cleaning	. 15
Pre-Installation3	Troubleshooting	. 15

Safety Information

READ AND SAVE THESE INSTRUCTIONS

- To reduce the risk of electric shock, ensure the electricity has been turned off at the circuit breaker or fuse box before you begin.
- All wiring must be in accordance with the National Electrical Code ANSI/NFPA 70-1999 and local electrical codes. Electrical installation should be performed by a qualified licensed electrician.
- The outlet box and support structure must be securely mounted and capable of reliably supporting 35 lbs. (15.9 kg). Use only UL Listed outlet boxes marked "Acceptable for Fan Support of 35 lbs. (15.9 kg) or less."
- 4. The fan must be mounted with a minimum of 7 ft. (2.1 m) clearance from the trailing edge of the blades to the floor.
- 5. Do not operate the reversing switch while the fan blades are in motion. You must turn the fan off and stop the blades before you reverse the blade direction.
- 6. Do not place objects in the path of the blades.
- 7. To avoid personal injury or damage to the fan and other items, use caution when working around or cleaning the fan.
- Electrical diagrams are for reference only. Light kits that are not packed with the fan must be UL-listed and marked suitable for use with the model fan you are installing. Switches must be UL General Use Switches. Refer to the instructions packaged with the light kits and switches for proper assembly.

- After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
- 10. All setscrews must be checked and retightened where necessary before installation.



WARNING: To reduce the risk of personal injury, do not bend the blade brackets (also referred to as flanges) during assembly or after installation. Do not insert objects in the path of the blades.



WARNING: Remove the rubber motor stops on the bottom of the fan before installing the blades or testing the motor.



WARNING: To reduce the risk of fire or electric shock, do not use this fan with any solid-state speed control device.



WARNING: To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. If you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.



WARNING: Electrical diagrams are for reference only.

Optional use of any light kit shall be UL-listed and marked suitable for use with this fan.



WARNING: To reduce the risk of fire, electric shock, or personal injury, mount to outlet box marked "Acceptable for fan support of 35 lbs. (15.9 kg) or less," and use the screws provided with the outlet box.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- --Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- --Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warranty

The supplier warrants the fan motor to be free from defects in workmanship and material present at time of shipment from the factory for a lifetime after the date of purchase by the original purchaser. The supplier also warrants that all other fan parts, excluding any glass or acrylic blades, to be free from defects in workmanship and material at the time of shipment from the factory for a period of one year after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned. To obtain warranty service, you must present a copy of the receipt as proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part, such as by accident, misuse, improper installation, or by affixing any accessories, is not covered by this warranty. Because of varying climatic conditions this warranty does not cover any changes in brass finish, including rusting, pitting, corroding, tarnishing, or peeling. Brass finishes of this type give their longest useful life when protected from varying weather conditions. A certain amount of "wobble" is normal and should not be considered a defect. Servicing performed by unauthorized persons shall render the warranty invalid. There is no other express warranty. Hampton Bay hereby disclaims any and all warranties, including but not limited to those of merchantability and fitness for a particular purpose to the extent permitted by law. The duration of any implied warranty which cannot be disclaimed is limited to the time period as specified in the express warranty. Some states do not allow a limitation on how long an implied warranty lasts, so the above limitation may not apply to you. The retailer shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives specific legal rights, and you may also have other rights which vary from state to state. This warranty supersedes all prior warranties. Shipping costs for any return of product as part of a claim on the warranty must be paid by the customer.

Contact the Customer Service Team at 1-855-HD-HAMPTON or visit www.HamptonBay.com.

Pre-Installation

SPECIFICATIONS

Size	Speed	Volts	Amps	Watts	RPM	CFM	Net Weight	Gross Weight	Cube Feet
	Low		0.21	11	63	1717	19.40 lb (8.8 kg)	1 1 2	
52 in.	Medium	120	0.35	28	105	2885			2.05 cu.ft.
	High		0.51	61	165	4356			




NOTE: These are approximate measures. They do not include the amps and wattage used by the light kit.



TOOLS REQUIRED





Electrical

tape




Step ladder

Pre-Installation (continued)

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.

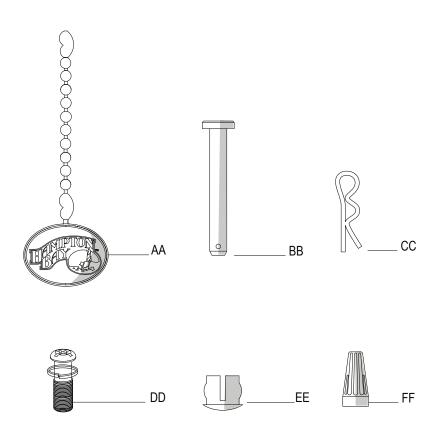

Part	Description	Quantity
AA	Pull chain	2
BB	Hanger pin	1
CC	Locking pin	1


Part	Description	Quantity
DD	Extra blade bracket screw	1
EE	Plastic plug (to be used for fan without light kit)	1
FF	Wire connecting nut	3


Pre-Installation (continued)


PACKAGE CONTENTS






















Part	Description	Quantity
А	Slide-on mounting bracket (inside canopy)	1
В	Ball/downrod assembly	1
С	Canopy	1
D	Fan-motor assembly	1
E	Light kit fitter assembly	1

Part	Description	Quantity
F	Blade	5
G	Blade bracket (with pre-installed screws)	5
Н	Glass bowl	1
I	LED bulbs (9.5-Watt Max.)	3



IMPORTANT: This product and/or components are governed by one or more of the following U.S. Patents: 5,947,436; 5,988,580; 6,010,110; 6,046,416, 6,210,117 and other patents pending.

MOUNTING OPTIONS





WARNING: To reduce the risk of fire, electric shock or personal injury, mount to an outlet box marked "Acceptable for fan support of 35 lbs. (15.9 kg) or less," and use the screws provided with the outlet box. An outlet box commonly used for the support of lighting fixtures may not be acceptable for fan support and may need to be replaced. If in doubt, consult a qualified electrician.


If your ceiling fan does not have an existing UL-listed mounting box, then install one using the following instructions:

- Disconnect the power by removing the fuses or turning off the circuit breakers.
- Secure the outlet box directly to the building structure. Use the appropriate fasteners and materials. The outlet box and its bracing must be able to fully support the weight of the moving fan (at least 35 lbs.). Do not use a plastic outlet box.

The illustrations below show three different ways to mount the outlet box.










NOTE: You may need a longer downrod to maintain proper blade clearance when installing on a steep, sloped ceiling. The maximum angle allowable is 30° away from horizontal.




If the canopy (C) touches the ball/downrod assembly (B), then remove the decorative canopy bottom cover and turn the canopy (C) 180° before attaching the canopy (C) to the mounting plate.

To hang your fan where there is an existing fixture but no ceiling joist, you may need an installation hanger bar as shown above (available at any Home Depot store).

Assembly - Standard Ceiling Mount


Preparing for standard mounting

- Remove the canopy bottom cover (HH) from the canopy
 (C) by turning the bottom cover counter-clockwise until it unlocks.
- Loosen the two canopy screws (GG) located in the bottom of the mounting bracket, and turn the canopy counterclockwise to remove the mounting bracket (A) from the canopy (C).



Pouting the wires

- Route the wires exiting the top of the fan motor assembly (D) through the center of the canopy bottom cover (HH).
- Make sure the opening of the canopy (C) is on top and insert the ball/downrod (B) through the canopy (C).
- Route the wires exiting the top of the fan motor assembly (D) through the downrod as shown.




3 Assembling the fan



WARNING: Failure to properly install the locking pin (CC) could result in the fan becoming loose and possibly falling.

- Loosen, but do not remove, the setscrews (II) on the collar on top of the fan-motor assembly (D).
- Align the holes at the bottom of the ball/downrod assembly
 (B) with the holes in the collar on top of the fan-motor assembly
 (D).
- Carefully insert the hanger pin (BB) through the holes in the collar and ball/downrod assembly (B). Be careful not to jam the hanger pin (BB) against the wiring inside the ball/ downrod assembly (B).
- Insert the locking pin (CC) through the hole near the end of the hanger pin (BB) until it snaps into its locked position.
- Re-tighten the setscrews (II) on the collar on top of the fanmotor assembly (D).



Assembly - Hanging the Fan

Attaching the fan to the electrical box




WARNING: To reduce the risk of fire, electric shock or personal injury, mount to an outlet box marked "Acceptable for fan support of 35 lbs. (15.9 kg) or less," and use the screws provided with the outlet box.




NOTE: The mounting bracket (A) is designed to slide into place on an outlet box with the outlet box screws (JJ).

- □ Pass the 120-Volt supply wires through the center hole in the slide-on mounting bracket (A).
- Install the slide-on mounting bracket (A) on the outlet box by sliding the slide-on mounting bracket (A) over the two screws (JJ) provided with the outlet box. If necessary, use leveling washers (not included) between the slide-on mounting bracket (A) and the outlet box. The flat side of the slide-on mounting bracket (A) should face toward the outlet box, as shown.
- □ Securely tighten the two mounting screws (JJ).



2 Hanging the fan

- Carefully lift the fan-motor assembly (D) up to the slide-on mounting bracket (A).
- □ Insert the ball portion of the ball/downrod assembly into the socket of the slide-on mounting bracket (A).
- ☐ Turn the ball/downrod assembly clockwise until it is seated with the tab of the slide-on mounting bracket (A) aligned with the slot in the ball.



Assembly - Hanging the Fan (continued)

3 Making the electrical connections



WARNING: Each wire nut supplied with this fan is designed to accept up to one 12-gauge house wire and two wires from the fan. If you have larger than 12-gauge house wiring or more than one house wire to connect to the fan wiring, consult an electrician for the proper size wire nuts to use.



WARNING: Remove the rubber motor stops on the bottom of the fan before installing the blades or testing the motor.



IMPORTANT: Use the plastic wire connectors (FF) supplied with your fan. Secure the connectors with electrical tape and ensure there are no loose strands or connections.



NOTE: The fan comes with 54 in. lead wires for use with an extended ball/downrod assembly. If using the 4.5 in. ball/downrod assembly (B) provided, you can cut the lead wires to your desired length (no shorter than 12 in.).

 Please refer to WINK remote installation instructions at the beginning of this document.


Assembly - Hanging the Fan (continued)

4 Wrapping the extra wire



NOTE: Follow this step ONLY if you did not cut the extra length off from the wires coming from the ceiling fan.

- Gently wrap the excess wire around the mounting bracket.
- Secure with electrical tape.

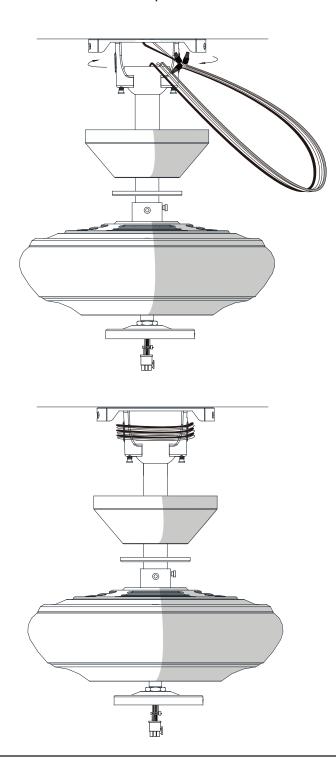


5 Mounting the fan-motor assembly (standard mount)



WARNING: When using the standard ball/downrod mounting, the tab in the ring at the bottom of the mounting bracket must rest in the groove of the hanger ball. Failure to properly seat the tab in the groove could cause damage to the wiring.

- □ Align the locking slots of canopy (C) with the two screws (GG) and alignment post (QQ) in the mounting bracket (A).
- Push up the canopy (C) and turn clockwise until the alignment post (QQ) engages the round hole and the screws (GG) engage to the key slots.
- ☐ Firmly tighten the two mounting screws (GG).
- Install the decorative bottom cover (HH) by aligning the covers slots with screws in the bottom of the canopy (C). Rotate the bottom cover clockwise to lock in place.

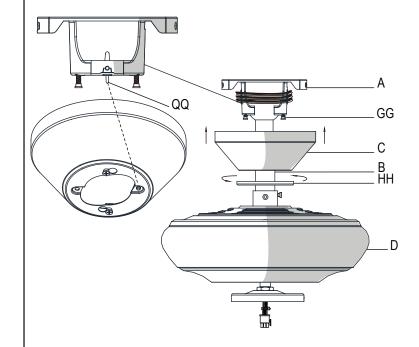

Assembly - Attaching the Fan Blades

1 Fastening the blade brackets to the motor




WARNING: Remove the rubber motor stops on the bottom of the fan before installing the blades or testing the motor.



NOTE: Your fan features revolutionary advancements for quick and easy blade installation, including an alignment post and captive blade bracket screws.

- Fasten the blade brackets (G) to the fan-motor assembly (D) by inserting the alignment post into the slot on the bottom of the motor and tightening the pre-installed blade bracket screws (LL).
- □ Repeat this step for the remaining blade assemblies.




2 Attaching the blades to the blade brackets



NOTE: Your fan blades are reversible. Select the blade side finish which best accentuates your decor.

- ☐ Mount the fan blade (F) to the blade bracket (G) by aligning the three key-slot holes in the blade (F) with the three posts on the top of the blade bracket (G).
- □ Hold the blade (F) with both hands close to the blade bracket (G) down firmly. Ensure the key-slot holes are properly seated on the blade bracket (G) posts.
- While still holding the blade (F) down with both hands, firmly slide the blade (F) until it engages in the locking mechanism (UU). Make sure the locking mechanism (UU) at the rear of the blade bracket (G) springs upward and butts against the edge of the blade (F), indicating a secure connection.
- □ Visually inspect the top of the blade bracket (G) to ensure the locking mechanism is securely in place.
- ☐ Repeat this procedure for the remaining blades (F).

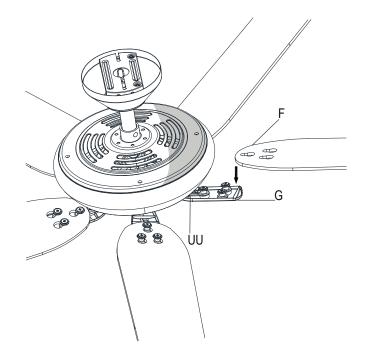

Assembly - Attaching the Lights

Attaching the light kit fitter assembly



IMPORTANT: It is critical to attach the switch cup using the quick connector. The fan will not operate unless the light kit is connected to the fan.




CAUTION: To reduce the risk of electric shock, disconnect the electrical supply circuit to the fan before installing the light fixture.



NOTE: Notice the location of the fan's slide switch. This is the switch used to change the fan's directional rotation. For more information on the operation of this switch, see *Operating Your Fan* on page 14.

- Remove and save the three light kit mounting screws (MM) on the black bracket below the fan-motor assembly (D).
- Connect the wires from the light kit fitter assembly (E) to the wires from the fan motor assembly (D) by connecting the molded adaptor plugs together. Carefully tuck all wires and splices into the switch cup.
- Align the three holes in the black bracket below fan motor assembly (D) with the three holes in the switch cup of the light kit fitter assembly (E). Position the light kit fitter assembly (E) and re-install the three screws (MM) that were removed in first step to secure the light kit fitter assembly (E).

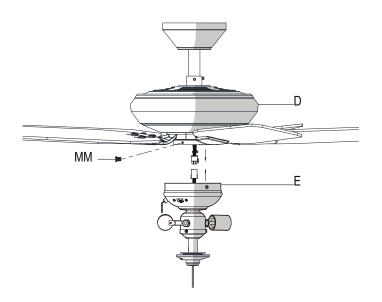

2 Installing the bulbs and glass bowl




WARNING: Allow the glass bowl to cool completely before removing.



CAUTION: Make sure the power is off before attaching or removing the glass bowl.

- □ Remove the finial (PP) and the bottom cover (00) from the threaded nipple of the light kit fitter assembly (E).
- With the power off, install the three LED bulbs (I) by screwing them into the light bulb sockets.
- Position the glass bowl (H), re-install the bottom cover (00) over the threaded nipple, and direct the fan pull chain through the side hole of the bottom cover (00).
- Re-install the finial (PP) over the threaded nipple and direct the light pull chain through the hole of the finial (PP), and tighten the finial (PP) securely.
- Attach the pull chain extensions (AA) provided to the light pull chain and fan pull chain.

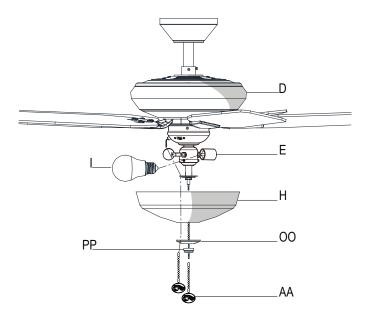


Assembly - Assembling the Fan Without the Light Kit


1 Assembling the fan without the light kit



IMPORTANT: It is critical to attach the switch cup using the quick connector. The fan will not operate unless the light kit is connected to the fan.

- □ Remove the three light kit mounting screws (MM) on the black bracket below the fan-motor assembly (D).
- In order to use the fan without the light kit, remove the switch cup (WW) from the top of the light kit fitter assembly (E) by removing the center hex nut (NN) inside the switch cup (WW), and then thread the switch cup (WW) off the threaded nipple on the top of the light kit fitter assembly (E).
- Press the plastic plug (EE) (provided) into the center hole of the switch cup (WW).
- □ Connect the quick connect couplers. (The fan will not start without this connection).
- Position the switch cup (WW) onto the black bracket and reinstall the light kit mounting screws (MM).

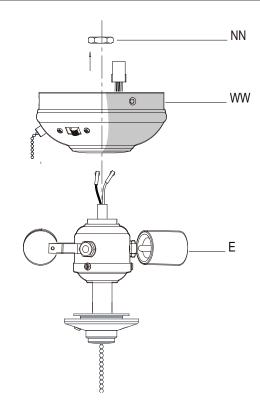

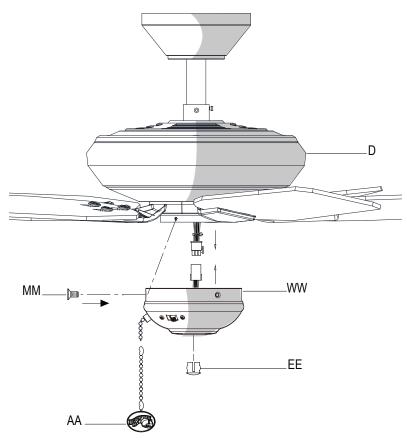

Operation

OPERATING YOUR FAN

Turn on the power and check the operation of the fan. The fan pull chain controls the fan speed as follows:

1 pull - High, 2 pulls - Medium, 3 pulls - Low, 4 pulls - off

The appropriate speed settings for warm or cool weather depends on factors such as the room size, ceiling height, and number of fans.


The slide switch (YY) controls the direction of the blades: forward (switch left) or reverse (switch right).




NOTE: Wait for the fan to stop before reversing the direction of the blade rotation.

- A. Warm weather (Forward) A downward airflow creates a cooling effect. This allows you to set your air conditioner on a higher setting without affecting your comfort.
- B. Cool weather (Reverse) An upward airflow moves warm air off of the ceiling. This allows you to set your heating unit on a lower setting without affecting your comfort.







Care and Cleaning



WARNING: Make sure the power is off before cleaning your fan.

- Because of the fan's natural movement, some connections may become loose. Check the support connections, brackets, and blade attachments twice a year. Make sure they are secure. It is not necessary to remove the fan from the ceiling.
- Clean your fan periodically to help maintain its new appearance over the years. Do not use water when cleaning, as this could damage the motor or the wood, or possibly cause an electrical shock. Use only a soft brush or lint-free cloth to avoid scratching the finish. The plating is sealed with a lacquer to minimize discoloration or tarnishing.
- You can apply a light coat of furniture polish to the wood for additional protection and enhanced beauty. Cover small scratches with a light application of shoe polish.
- o You do not need to oil your fan. The motor has permanently-lubricated sealed ball bearings.

Troubleshooting

Problem	Solution
The fan will not start.	 Check the main and branch circuit fuses or breakers. Check the line wire connections to the fan and switch wire connections in the switch housing.
The fan is noisy.	 Ensure all motor housing screws are snug. Ensure the screws that attach the fan blade bracket to the motor hub are tight. Ensure the wire nut connections are not rattling against each other or the interior wall of the switch housing. Allow a 24-hour "breaking in" period. Most noises associated with a new fan disappear during this time. If you are using the Ceiling Fan light kit, ensure the screws securing the glassware are tight. Check that the light bulbs are also secure. Ensure the canopy is a short distance from the ceiling. It should not touch the ceiling. Ensure your outlet box is secure and rubber isolator pads were used between the mounting plate and outlet box.
The fan wobbles.	 Check that all blade and blade arm screws are secure. Most fan wobble problems are caused when blade levels are unequal. Check this level by selecting a point on the ceiling above the tip of one of the blades. Measure from a point on the center of each blade to the point on the ceiling. Measure this distance. Rotate the fan until the next blade is positioned for measurement. Repeat for each blade. Any measurement deviation should be within 1/8 in. Run the fan for ten minutes. If the fan continues to wobble please contact Customer Service and a balancing kit will be sent to you at no charge.



Questions, problems, missing parts? Before returning to the store, call Hampton Bay Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST Saturday

1-855-HD-HAMPTON HAMPTONBAY.COM

Retain this manual for future use.