

iPro4200

4200 Watt Open Frame Digital Inverter Gasoline Portable Generator

3500 Running Watts | 4200 Peak Watts



50 State Model



Fuel efficient, 4 gallon fuel tank that runs 22 hrs at 25% load

Two 5V USB ports for charging sensitive electronics such as phones or tablets

OSHA GFCI outlets, three 120V 20A duplex 5-20R outlets

VFT meter displays volts, frequency, and lifetime hours

Fuel efficiency of enclosed inverter combined with durability of open frame generator



Dependable 7.5 HP 212cc OHV 4-Stroke Westinghouse engine



A variable speed engine and low tone mufflers significantly reduce operating noise




JOB SITE APPLICATIONS

<3% THD  **SINE WAVE OUTPUT**

What Comes in the Box



Control Panel

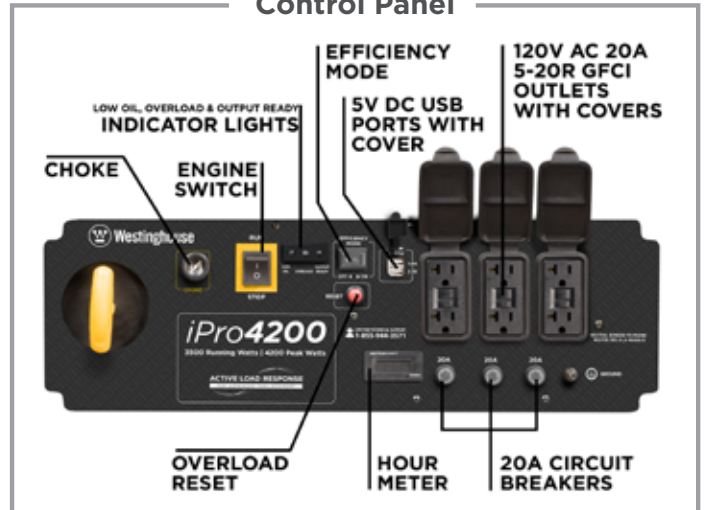

iPro4200

Open Frame Inverter Generator Specifications



Gasoline Peak Watts	4200
Gasoline Running Watts	3500
Peak Amps at 120V	35 amps
Running Amps at 120V	29 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable	No
Engine Horse Power (HP)	5.9 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery Included	No
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 3600
Operational Volume	As low as 62 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)
Run Time at %25 Load (hrs.)	22 hrs.
Run Time at %50 Load (hrs.)	12 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Manual

AC Outlets	(3) Duplex 120V 20A GFCI (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Neutral Bonded to Frame
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready	No
Volts, Frequency, Lifetime Hour Meter	Yes
GFCI Outlets	Yes
OSHA Compliant	Yes
LED Data Center	No
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle	No
Emissions	EPA, CARB
Canada CSA Compliant	No
Wheel Kit Included	No
Wheel Kit Ready	No
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years or 1000 hrs.
Commercial Warranty	6 Months or 1000 hrs.
Assembled Length in. (mm)	24 in. (609 mm)
Assembled Width in. (mm)	20.5 in. (520 mm)
Assembled Height in. (mm)	20 in. (508 mm)
Carton Length in. (mm)	28 in. (711 mm)
Carton Width in. (mm)	22 in. (558 mm)
Carton Height in. (mm)	25 in. (635 mm)
Dry Unit Weight lb. (kg)	82 lb. (37 kg)
Shipping Weight lb. (kg)	87 lb. (39 kg)
UPC	855464003735
GTIN	00855464003735

03202018KD
 ©2018 Westinghouse Outdoor Power Equipment
 Specifications are subject to change without notice
 Westinghouse Portable Power
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team
 at service@wpowereq.com or call
 855.944.3571**

