



## **CX POWER SERIES**

**Portable Generators** 

1 of 2

## **Features**


- Digital multi meter tracks engine runtime for maintenance intervals.
- Powermate OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown prevents engine damage.
- Fuel gauge allows user to keep track of gasoline levels.
- RV Ready TT-30R outlet.
- Never flat wheels for easy transportation.
- Covered outlets provide protection and keep out debris.
- Single fold-down, locking handle for easy mobility.
- Ergonomic frame for easy portability.

Model PC0143500 UPC: 696471620757 (49 ST/CSA) Model PMC143500 UPC: 696471620764 (CARB)



AC Rated Output Running Watts 3500 AC Maximum Output Starting Watts 4375

## 49-State/CSA & CARB Control Panel

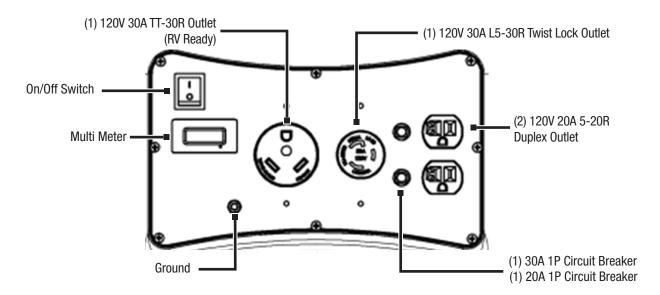



Product Series	CX3500
Model (Configuration)	PC0143500 (49 ST/CSA) PMC143500 (CARB)
AC Rated Output Running Watts:	3500
AC Maximum Output Motor Starting Watts:	4375
AC Voltage	120 VAC
AC Frequency	60 Hz
Rated VAC Amperage	29.1
Engine Displacement	208cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	SAE 10W-30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Fuel Tank
Starting Method	Recoil Pull Start
Low Oil Shutdown Method	Low Level
Neutral Bonded to Ground	Yes
Start Switch Type	Engine On/Off Switch

Start Switch Location	On Control Panel
Fuel Gauge	Built-In Tank
Fuel Tank Capacity Gal (Ltrs)	4.5 (17)
Run Time at 50% (Hours)	12.2
Handle Style	Single Folding
Wheel Type	8" Solid Wheels
Warranty - Residential	2 Year Ltd
Warranty - Commercial	1 Year Ltd

## **Dimensions and Weights**

Length in (mm)	25.6 (651)
Width in (mm)	23.8 (605)
Height in (mm)	21.6 (548)
Carton Length in (mm)	27 (685)
Carton Width in (mm)	23 (585)
Carton Height in (mm)	20.5 (520)
Unit Weight lbs (kg)	108 (49)
Shipping Weight lbs (kg)	116 (52.6)







2 of 2