

A complement to any commercial or residential space, the Patrícia–5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia–5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia–5 carries a limited lifetime warranty.



SKU NAMING CONVENTION						
SKU#	PA5-XX-XX-XX (Model+Finish+Blade	e+Diameter)				
Standard Finishes	Brushed Nickel Polished Chrome Textured Bronze	- BN - CR - TB				
Special Order	Gloss White Matte Black	- WH - BK				
Blade Finish	Barn Wood Tone Walnut Tone	- BW - WA				
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	- <b>52</b>				

## **STANDARD EQUIPMENT**

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 30°

Light cover

6-speed RF remote control with reverse function in black



Wireless Decorastyle, 6-speed, wall control in white




CEILING HEIGHT / DOWNROD TABLE					
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded				
10 ft or less	5 inches / 13 cm				
10 -12 feet	10 inches / 25 cm				
13 feet	20 inches / 51 cm				
14 feet	30 inches / 76 cm				
15 feet	48 inches / 122 cm				
16 feet +	72 inches / 183 cm				

CEILING PITCH TABLE					
0/12	0 degrees				
1/12	4.76 degrees				
2/12	9.46 degrees				
3/12	14.04 degrees				
4/12	18.43 degrees				
5/12	22.62 degrees				
6/12	26.57 degrees				
7/12	30.26 degrees				
8/12	33.69 degrees				
9/12	36.87 degrees				
10/12	39.81 degrees				
11/12	42.51 degrees				

## Patrícia-5

## TECHNICAL SPECIFICATIONS

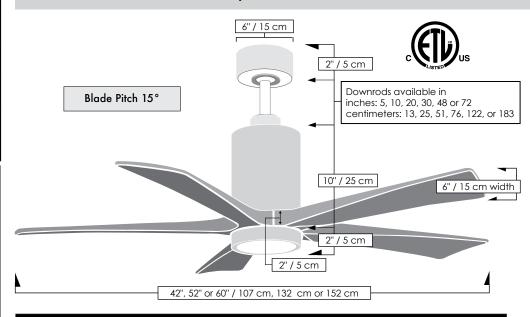

FAN SPECIFICATIONS										
Fan Diameters		inches: 42, 52 or 60 centimeters: 107, 132 or 152								
Overall Drop		14 inches / 36 cm + downrod length								
Fan V	Veight	19 lbs								
Downrods Lengths Field cuttable. Non-threaded		inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183								
Downrod Diameter		1 inch								
Voltage		110 (Please contact us for 220 conversion)								
Motor Type		DC								
Remote C	Remote Control		Hand-held, wall-mountable, 6-speed with reverse							
Wall C	Wall Control		Decora-style wall control: DC-WC							
Environment		Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible								
Ambience		Silent								
Safety Certification		ETL / CETL								
Warranty		Limited Lifetime								
MC	OTOR E	FFICIE	NCY DA	ATA A	T HIGH SPE	EDS				
	42 in	12 inch / 107 cm		52 inch / 132 cm		n 60	60 inch / 152 cm			
RPM		221		186			87			
CFM		4385.74			5524.13		5546.78			
Watts	30.47			31.80			31.64			
CFM/Watt	143.94		173.71			175.31				
Blade Pitch		15°			15°		15°			
LIGHT KIT PHOTOMETRICS										
Lamping (Replaceable)	Remo Dimmo	Temper		ature	Delivered Lumens	CRI	Watts	Hours		
Integrated LED	Yes	s 3075		5 K	690	90	16	60,000		

## **Matthews Fan Company**

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140

www.matthewsfanco.com © 2017 Matthews Fan Company. All rights reserved.

