

Features

- Adjustable sprayface rotates to select wide-coverage or forceful utility spray options
- MasterClean™ sprayface resists hard water buildup and is easy to clean
- 2.5 gallon (9.5 L) per minute flow rate
- Handshower contains flow regulating check valve for backflow prevention

**ELLIPSE HANDSHOWER
K-10257**



Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes	
K-10257	Ellipse handshower - black handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-10257-GR	Ellipse handshower - grey handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-10257-R	Ellipse handshower - red handle	<input type="checkbox"/> CP	
Required Accessories			
K-8593	72" (182.9 cm) metal shower hose OR	U	<input type="checkbox"/> CP
K-9514	60" (152.4 cm) metal shower hose		<input type="checkbox"/> CP

Product Specification


Multi-function ellipse handshower shall feature adjustable sprayface that rotates to select wide-coverage or forceful utility spray options. Handshower shall feature a MasterClean sprayface which resists hard water buildup and is easy to clean. Handshower shall be available with a 2.5 gallon (9.5 L) per minute flow rate. Handshower shall contain flow regulating check valve for backflow prevention. Handshower shall be Kohler Model K-10257-____-____.

Installation Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

NOTE: Handshower contains flow regulating check valve for backflow prevention.

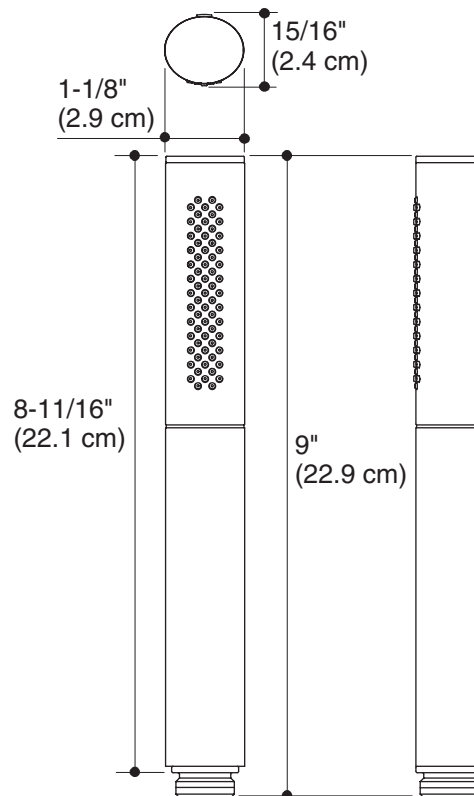

Product Diagram