



Racking a Vinyl Gate

For Full Privacy Styles

INSTALLATION INSTRUCTIONS

⚠ WARNING:

- Improper installation of this product can result in personal injury. Always wear safety goggles when cutting, drilling and assembling the product.
- Incorrect installation may cause harm to the product or individual.
- Not pool code approved.
- Do not allow children to play with the gate.

NOTICE:

- DO NOT attempt to assemble the kit if parts are missing or damaged.
- DO NOT return the product to the store. For assistance or replacement parts call: 1-800-336-2383.

TOOLS NEEDED:

Saw
Safety Glasses
Chemical Bonding Compound
Tape Measure
Drill
#2 Square Drive Bit

COMPONENTS NEEDED:

Top Rail of Gate
Bottom Rail of Gate
Gate Uprights
Gate Infill Boards
Screws

To obtain and review a copy of the warranty please go to: Veranda.BarretteOutdoorLiving.com/warranty. You can also contact 1-877-279-4496 or write to Veranda, 7830 Freeway Circle, Middleburg Heights, Ohio 44130 to obtain a copy of the warranty.

NOTE:

In order to rack a gate, some material must be removed from the end of the top and bottom rails.


It is important to use the correct cutting instructions when removing material from the rail.

Locate the drawing that matches the rail size of the gate you have purchased – compare the End View in the drawing to that of your rail to ensure a match.

1 Cut top and bottom rails as instructed. See drawings on the following pages with cuts shown in red.


2 Assemble uprights, infill boards, and rails as normal using chemical bonding compound. ****Must work quickly at this point so bonding compound does not cure before screwing the assembly together.**

3 Rack gate to the desired angle. Max 8° of rack, or 1" per foot of width of gate (Fig. 1).

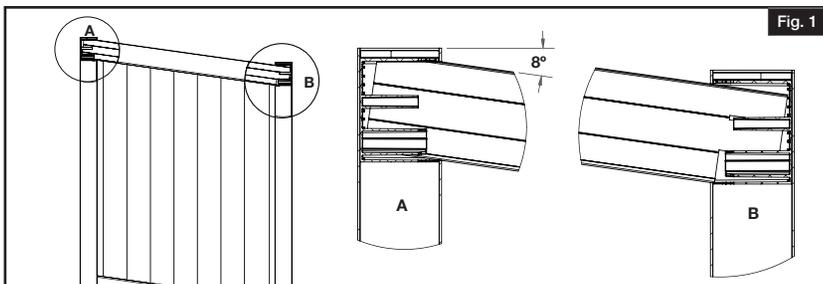

4 Screw the assembly together, and let compound cure until dry.

BRYCE / WASHINGTON

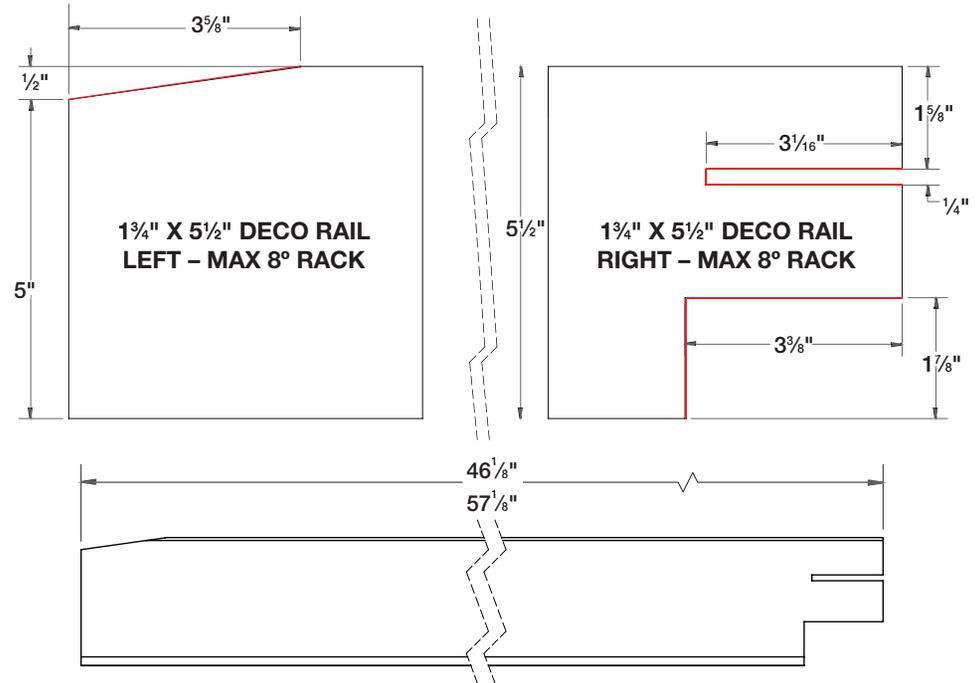

LINDEN

